


# X2





## Key Features

- Fully modular Input & Output design, easily configured and maintained
- 16 outputs drive up to 32K1K screen (LCD/LED/Projector)
- Multiple operation mode
- Popular 4K, 3D and HDBaseT input available for 16 inputs.
- H.264 PVW output gives dedicated preview on XPOSE or extended monitoring
- Output rotation with 90° increment(90°/180°/270°)
- OSD (On Screen Display) function available
- Genlock Y and HDMI digital sync input allows X2 keep all outputs synchronizing
- Redundant PSU option

## Application

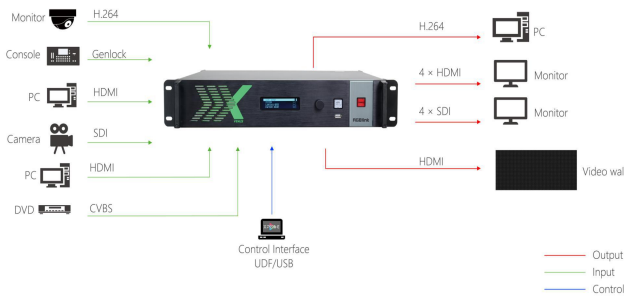

## Dimensions

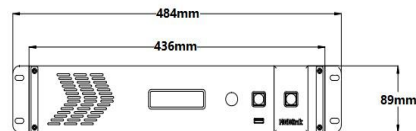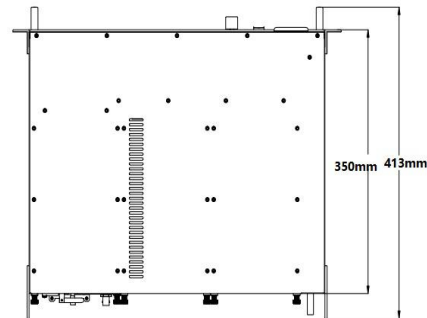

## Order Codes

Product Code	Item
310-0002-01-0	X2
190-0002-02-2	Quad HDMI Input Module
190-0002-03-0	VGA Input Module 3 x VGA
190-0002-04-1	Quad SDI Input Module
190-0002-05-0	CVBS Input Module 4 x CVBS
190-0002-06-0	Quad HDBaseT Input Module
190-0002-09-0	Quad H.264 Input Module

Product Code	Item
190-0002-10-1	Quad USB Input Module
190-0002-11-0	4K@30 Digital Input Module
190-0002-22-0	Quad 2K HDMI Output Module
190-0002-24-0	Quad 3G-SDI Output Module
190-0002-25-0	Quad HDBaseT Output Module
190-0002-50-1	IP Streaming Output
950-0001-00-0	Power Supply 200W

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China  
 Specifications are correct at time of printing and subject to change or alteration without notice.



# Specification

<b>Connectors</b>	Input	4 slots, up to 16 inputs <i>Select from</i>			
		HDMI 2K Module	4 x HDMI	VGA Module	3 x DB15
		3G SDI Module	4 x BNC	H.264 Input Module	4 x RJ45
		USB Module	4 x USB	4K@30 Module	1 x HDMI-A&LOOP   1 x DP&LOOP
		CVBS Module	4 x BNC	HDBaseT Module	4 x R45
	Output	4 slots, up to 16 outputs <i>Select from</i>			
		HDMI 1.3 Module	4 x HDMI-A		
		SDI (SD/HD/3G) Module	4 x BNC		
		HDBaseT Module	4 x RJ45		
		H.264 Module	1 x HDMI-A   2 x RJ 45		
	PVW	H.264/HDMI	1 x HDMI-A   2 x RJ 45		
	Communication	ULink In   Out	2 x 3.5mm Jack		
		LAN	1xRJ45		
		Genlock/Sync	1 x BNC   1 x HDMI-A		
	Power	2 slots, up to 2 power inputs	1 x IEC (Each PSU)		
<b>Performance</b>	Input Resolutions	SDI SMPTE 480i   576i   720p@50/60   1080i@59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   1080psf@23.98/24/25/29.97/30 /50/59.94/60 HDMI   USB SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 VESA 800x600@60   1024x768@60   1280x768@60   1280x1024@60   1600x1200@60   1920x1200@60   2048x1152@60   2560x816@60 HDBaseT SMPTE 720p@50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60 VESA 800x600@60   1024x768@60   1280x768@60   1280x800@60   1280x1024@60   1360x768@60   1366x768@60   1400x1050@60   1400x900@60   1680x1050@60   1600x1200@60   1920x1080@60   1920x1200@60   2048x1152@60   2560x812@60   2560x816@60 VGA VESA 800x600@60   1024x768@60   1280x1024@60   1366x768@60   1440x900@60   1600x1200@60   1920x1080@60 HDMI1.4   DP 1.1a SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60   2160p@30 VESA 3840 x 2160@24   3840 x 2160@25   3840 x 2160@30 CVBS SMPTE 480i 576i H.264 VESA 176x144@60   240x180@60   320x180@60   320x256@60   352x226@60   352x480@60   400x224@60   400x322@60   480x270@60   480x320@60   480x360@60   480x384@60   480x480@60   544x480@60   608x448@60   640x360@60   704x576@60   720x480@60   720x540@60   720x576@60   850x480@60   1024x576@60   1280x720@60   1680x1056@60   1920x1080@60			
	Output Resolutions	<i>Select from below or configure customized</i> SDI SMPTE 720p@50/59.94/60   1080i@50/59.94/60   @1080p@50/59.94/60 HDMI SMPTE 720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 VESA 800x600@60   1024x768@60/75/85   1280x720@50/59.94/60   1280x800@60   1280x960@60   1280x1024@60/75/85   1400x1050@60   1600x1200@60   1920x1080@23.98/24/25/29.97/30/50/59.94/60   2048x1152@60 H.264 176x144@60   240x180@60   320x180@60   320x256@60   352x226@60   352x480@60   400x224@60   400x322@60   480x270@60   480x320@60   480x360@60   480x384@60   480x480@60   544x480@60   608x448@60   640x360@60   704x576@60   720x480@60   720x540@60   720x576@60   850x480@60   1024x576@60   1280x720@60   1680x1056@60   1920x1080@60			
	Supported Standard	HDMI 1.4		VGA	UXGA
		DP 1.1a		HDBaseT	1.1
		USB 2.0			
		SDI SMPTE 425M (Level A & B)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI			
	Grey Level	10 bit			
	<b>Features</b>	Max Numbers of	16		
		Splicing	16k2k		
		Remote Control	XPOSE (Windows/MacOS)   OpenAPI   T Series Console		
<b>Power</b>	Input Voltage	100V-240V 50/60-Hz auto ajusted			
	Max Power	200W			
<b>Enviroment</b>	Temperature	0°C ~40°C			
	Hudmidity	10%~85%			
<b>Physical</b>	Weight	Net	12kg		
		Package	18kg		
	Dimension	Net	484mm*413mm*91mm		
		Package	630mm*595mm*255mm		