




\*Pad not included


## Application

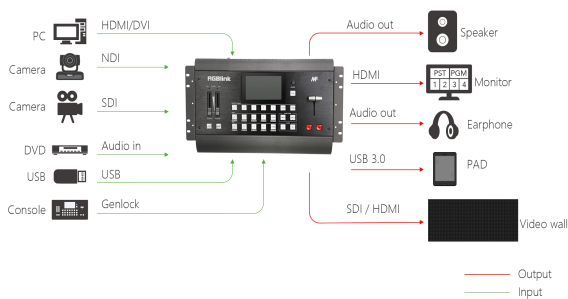

## Key Features

- Module based design for wide range in/out request
- Module hot swappable
- Preview 4 inputs
- Seamless switching between PST and PGM
- Support NDI decoding
- Multiple audio outputs available
- Streaming via USB 3.0 output module and mobile phone
- 2 video layers plus additional layers for OSD, LOGO, STILL
- Mask for foreground layer including support for user defined mask
- Compatible with all kinds of Digital Displays
- Genlock Y In
- Multiple Presets and savable to the external USB disk
- 14 Transition Effects on the T-bar and TAKE button
- PTZ VISCA control compatible

## Dimensions

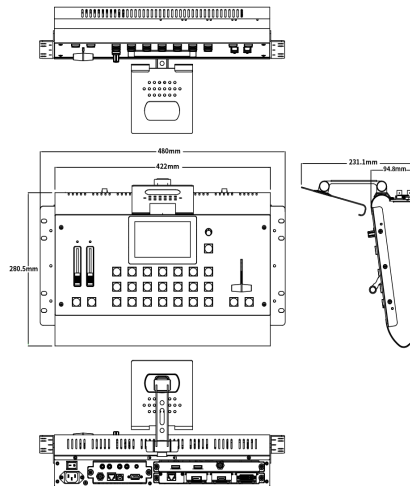

## Order Codes

Product Code	Item
220-0001-04-0	M1-NDI
190-0001-04-2	Single DVI Input Module
190-0001-07-2	Single 3G-SDI Input/Loop Module

Product Code	Item
290-0001-08-0	Single NDI Input Module
190-0001-10-2	Single USB 2.0 Input/Backup Module
190-0001-13-2	Single HDMI Input Module

### \* M1-NDI is standard with :

- 1 x Output Module PGM HDMI | USB 3.0 | PVW HDMI
- 2 x Single NDI Input Module
- 1 x EXT Module (NDI module supported)
- 1 x Wings (pair)
- 1 x Rack

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**  
www.rgbink.com



## Specification

<b>Connectors</b>	Input	1 slot up to 4 single inputs <i>Standard with</i> NDI Module 2×RJ45 <i>Select from</i> DVI Module 1×DVI-I (compatible with DVI/VGA/YPbPr/CVBS) HDMI Module 1×HDMI-A SDI Module 2×BNC (1 In   1 Loop) USB Module 2×USB (1 In   1 backup) NDI Module 1×RJ 45
	Output	1 slot up to 2 single outputs <i>Standard with</i> Output Module PGM HDMI   USB 3.0   PVW HDMI 2×HDMI-A   1×USB-A
	Audio	IN L/R 2×RCA OUT L/R 2×RCA OUT 1×3.5mm Stero Jack
	Communication	LAN 1×RJ 45 Tally 1×DB15 USB 1×USB Type B Genlock Y 1×BNC
	Power	1×IEC
	<b>Performance</b>	Input Resolutions
Output Resolutions		<i>Select from below or customized</i> SDI SMPTE 480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 HDMI SMPTE 720p @50/59.94/60   1080p@50/59.94/60 VESA 1024×768@60   1280×720@60   1280×1024@60   1360×768@60   1920×1080@60 USB 3.0 (follow HDMI) 1024×768@60   1280×720@60   1280×1024@60   1360×768@60   1920×1080@60
Supported Standards		SDI SMPTE 425M (Level A & B)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI HDMI 1.3 DVI Single Link NDI decoding NDI HX2 USB 3.0
Layers		2
<b>Features</b>	MASK Edit	Support
	Brightness	Standard range
	EDID Management	Yes
	Input Voltage	AC 85V-264V, 50/60Hz
<b>Power</b>	Max Power	120W
	Temperature	0– 55°C
<b>Working Environment</b>	Humidity	10% - 90%
	<b>Physical</b>	Weight
Package 8kg		
Dimensions		Net 480mm×280.5mm×231.1mm
		Package 585mm×410mm×205mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

