

# IC2




## Key Features

- Resolutions up to 1920 × 1080@60Hz
- Support embedded audio
- Single interface supports up to 4 layers
- Support multi-layers splicing, scaling, overlay and roaming
- Switch TX/RX via DIP
- Indicator lights
- Support USB keyboard and mouse ( KVM )
- Static and dynamic OSD overlay


## Specification

<b>Connectors</b>	Input	HDMI	1×HDMI-A
	Output	HDMI	1×HDMI-A
	Communication	USB	2×USB-A
		LAN	1×RJ45
		RS232	1×Phoenix
	Audio	Audio in	1×3 pin Phoenix
Audio out		1×3 pin Phoenix	
Power		1×DC Jack	
<b>Performance</b>	Input Resolutions	HDMI	
		SMPTE	720p@60
		VESA	1024×768@60   1280×1024@60   1440×900@60   1920×1080@60
	Output Resolutions	HDMI	
		SMPTE	720p@60
VESA		1024×768@60   1280×1024@60   1440×900@60   1920×1080@60	
Audio Format	AAC/G711A		
Supported Standard	HDMI 1.3		
<b>Power</b>	Input Voltage	DC 12V	
	Max Power	20W	
<b>Environment</b>	Temperature	0°C ~ 60°C	
	Humidity	0%~65%	
<b>Physical</b>	Weight	0.4kg	
	Dimension	160mm×128mm×37.1mm	

## Application

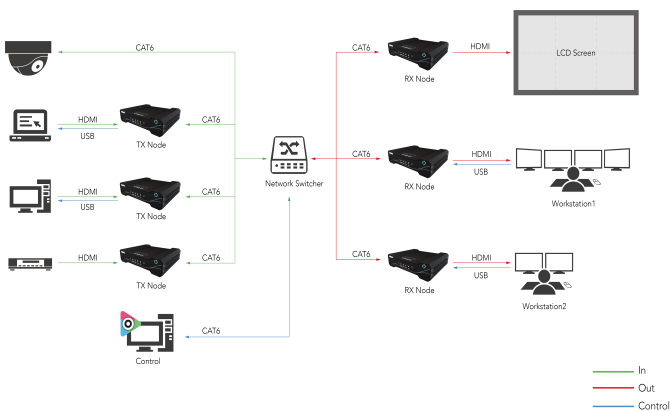

## Dimension

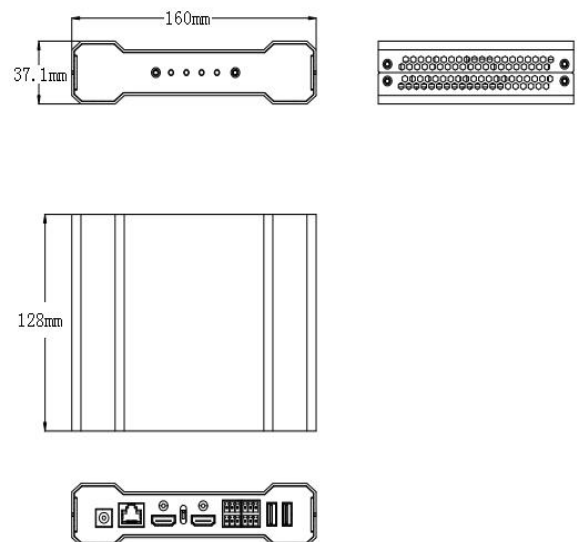

## Order Codes

Product Code	Item
660-0002-01-0	IC2
920-0007-01-0	IC garage

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com  
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



www.rgbink.com

