



CPC

CP is CUBE

Content Production is CUBE

mini suite case

This Dedicated Portable Case made of high-strength PP material is equipped with one 13.3-inch IPSdisplay, one switcher and one LED control card. Integrated audio and video switching, PTZ cameracontrol, multi-view monitoring, recording, LED management in one case, this portable and shock - resistant carry case is perfect for all sites, from music festival to lawn wedding, sports competition and other outdoor activities.



Portable and compact



Highly integrated




Cost-effective



Out of the box



Hydraulic rod bracket



Built-in monitor

Push flow

You can directly push streams through the network port RTMP(S) without a laptop, and support up to 2 platforms to push streams at the same time. With RGBlink's self-developed TAO cloud, 32 third-party platforms around the world can push streams at the same time, explaining the powerful integration function.

Live broadcast

Whether it is mx or edge, it can be connected to a variety of external devices, such as cameras, notebooks and rich audio sources. It is rich and flexible. It can be easily completed for live demonstrations and streaming, realizing the advantages of multi-function all-in-one machines, and live broadcasting is more professional!

Control

The integration includes the canvas in the picture, the pivot map, the reduction and cropping parameters, the signal source selection, the preset camera position of the PTZ camera, etc., Without the need for an additional control panel, 4 cameras can be controlled at the same time in this machine, and the camera can be adjusted, scaled, and the viewing angle can be controlled at any angle through the standard VISCA protocol, and the camera position can be changed at will.

Pre-supervision

The director station has an integrated LCD display, and the air box has a built-in 13.3-inch IPS highlight monitoring screen, allowing you to monitor each scene screen and all audio and video input signal sources in real time.

Switch effects

It has 17 kinds of switching effects to transition and switch between live video programs and presets. Call the saved preset view and the scaled video layer to get the professional look of the prepared broadcast or presentation.

LED display Control system

Built-in LED sending card for air box
Realize the function of convenient carrying and immediate connection to control the LED display.



Applicable live broadcast switcher model

mini-edge



Personalized shortcut key design
One-click easy access to the required functions



mini-mx



Touch the menu icon to enter the function management interface in an instant, Enjoy a smooth and intelligent touch experience

Optional interface

Professional aviation plug interface, high quality and performance assurance
Flexible interface and format conversion, personalized application private customization


mini-edge-subito mini-edge-st
mini-mx-subito mini-mx-st
4 × HDMI



mini-edge-1s-subito mini-mx-1s-subito
mini-edge-1s mini-mx-1s
3 × HDMI + 1 × SDI



mini-edge-2s-subito mini-mx-2s-subito
mini-edge-2s mini-mx-2s
2 × HDMI + 2 × SDI

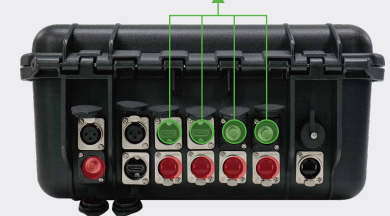

*The standard red interface is unique to the subito version.
If you need more optional interfaces, you can contact our sales staff.

High strength PP engineering plastic material

High-strength safety protection suitcase, shockproof, compression-resistant and durable
Easy to carry, you can broadcast wherever you want



Inside the carrying case 13.3 inch widescreen display

Integrated 13.3-inch 350 nits HD ISP screen,
Integrated design of screen console, can be used out of the box



Comes in the box Active cooling fan

Integrate the fan in the box to improve the internal utilization rate
Long-lasting release of machine high performance



Waterproof and dustproof, Anti-kick

The interface is equipped with a dust-proof plug to achieve all-round protection,
It is effectively waterproof and dustproof and prevents accidental kicks.



Air box Integrated design

The front of the air box integrates an audio interface and USB-B (LED control port),
Bring intuitive and convenient operation experience



USB-C Multi-function application interface

Can be customized to achieve live broadcast recording,
media video material,
Multimedia applications such as omnidirectional microphone
audio and video capture



Carry it with you without burden

The compact design ensures ultimate portability and durability
No matter where you go, mobile live streaming is at your fingertips



Product application

The mini suite case is small and compact but fully functional, showing the unlimited potential of video presentations, whether it is live broadcast or remote live broadcast.


Can be easily achieved. Its powerful practicality covers all fields, where you will always find the live broadcast method you want!



Club



Concert



Worship



Event



Conference



Training



Celebration



Education



Sport



Specification

Order Codes

Item

Connectors

		230-0004-03-0	230-0004-04-0	230-0004-05-0	230-0004-06-0	230-0004-07-0	230-0004-08-0	230-0006-02-0	230-0006-03-0	230-0006-04-0	230-0006-05-0	230-0006-06-0	230-0006-07-0
		mini-mx-st	mini-mx-subito	mini-mx-1s	mini-mx-1s-subito	mini-mx-2s	mini-mx-2s-subito	mini-edge-st	mini-edge-subito	mini-edge-1s	mini-edge-1s-subito	mini-edge-2s	mini-edge-2s-subito
Input	HDMI 4K (HDMI-A)	4	4	3	3	2	2	4	4	3	3	2	2
	SDI (BNC)	0	0	1	1	2	2	0	0	1	1	2	2
	UVC (Webcam USB-C)	1	1	1	1	1	1	1	1	1	1	1	1
Output	HDMI 2K (HDMI-A)	1	1	1	1	1	1	1	1	1	1	1	1
	SDI (BNC)	0	0	1	1	1	1	0	0	1	1	1	1
	UVC (USB-C)	1	1	1	1	1	1	1	1	1	1	1	1
	LAN (Stream RJ45)	1	1	1	1	1	1	1	1	1	1	1	1
	USB (Record USB-C)	1	1	1	1	1	1	1	1	1	1	1	1
	LAN (Subito RJ45)	0	4	0	4	0	4	0	4	0	4	0	4
Audio In	MIC	1×CANNON Jack (XLR) (mini-mx 2 x CANNON Jack)											
	LINE	1 × 6.35mm TRS Jack											
	Bluetooth	1 × Bluetooth Module											
	HDMI	(Optional 2-4)HDMI-A											
	SDI	(Optional 0-2)BNC											
Audio Out	LINE	1 × 6.35mm 6.35mm TRS Jack											
		1 × 3.5mm mini-Jack											
	HDMI	1 × HDMI-A											
	UVC	1 × USB-C											
	LAN	1 × RJ45											
	USB(Control)	1 × USB-C											
Control	USB (Subito)	1 × USB-B											

Performance

Input Resolution	HDMI	1280×720@50/59.94/60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1200@60 1920×1080i@50/59.94/60 1920×1080p@23.98/24/25/29.97/30/50/59.94/60 3840×2160p@30/50/60 4096×2160@30/50/60
	SDI	1080P@23.98/24/25/29.97/30/50/59.94/60
Output Resolution	HDMI	1280×720@50/60 1024×768@60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@23.98/24/25/29.97/30/50/59.94/60
	SDI	1080P@23.98/24/25/29.97/30/50/59.94/60
	USB(Webcam)	1920×1080@24/25/30/50/60
Video	Video Formats	HDMI 2.0 HDCP 2.2
	Grayscale Processing	10bit
	Video Sampling	4:4:4 YUV
	Video Latency	<4 frames
Audio	Line In Delay	up to 8 frames
	Audio Format	HDMI: Linear PCM, 24 bits/48 kHz, 2 ch USB: Linear PCM, 16 bits/48 kHz, 2 ch
Record/Storage	Record Formats	MP4
	Disk Formats	FAT32(≤32 GB) exFAT(64GB~2T)
Supported Standards	HDMI	2.0
	USB	3.0
	H.265	ITU-T H.265/ ISO/IEC 23008 -2

13.3" Display

Screen Size	13.3"
Panel Type	IPS
Display Color	16.7M, 72%NTSC/16.7M, 100%sRGB
Resolution	1920×1080
Aspect Ratio	1000:1
Gamut	72%
Brightness	350 cd/m ²
Refresh Rate	60Hz
View Angle	85°/85°(L/R) 85°/85°(U/D)

Subito

RJ45(each port)	
Capacity	655,360 pixels
Horizontal Range	3840 pixels
Vertical Range	1920 pixels

Power

Input Voltage	PD 12V/5A
Maximum Power	60W

Physical

Outer Size	460mm × 360 mm × 200mm
Material	PP
Color	Black
Product Weight	7kg
Packaged Weight	9.23 kg
Product Dimension	460mm × 360mm × 200mm
Packaged Dimension	470mm × 370mm × 210mm