

MSP 216 Quick Start



- Compact structure, simple to operate
- Support Blu-ray DVD
- Support HDMI 1.3, DVI 1.0 protocol
- Support full HD 1080P of HDMI input
- Support max DVI input resolution
4096×1152×60Hz
- Automatic identification for input format
- Signal indicator real-time display
- Automatic adjustment for DVI output gain

CONTENT

Product Introduction	2
Packing Configuration	3
Hardware Orientation	4
Specification	5

Product Introduction

MSP 216 is the DVI Distributor with high performance, high stability, high-definition.


It supports Blu-ray DVD, and supports HDMI 1.3, DVI 1.0 protocol. The DVI Distributor can receive full HD 1080P of HDMI signal, and max resolution 4096x1152 of DVI signal, which is also automatic identification of input format.

MSP 216 supports 1 input and 2 real-time outputs, automatic adjustment for output signal gain. It has no format conversion function and with the same input and output resolution.

The DVI Distributor has small and compact structure, and it is simple to operate.

System Connection

RGBlink offers solutions to demanding technical problems. Any application questions, or required further information, please contact with our customer Support Engineers.

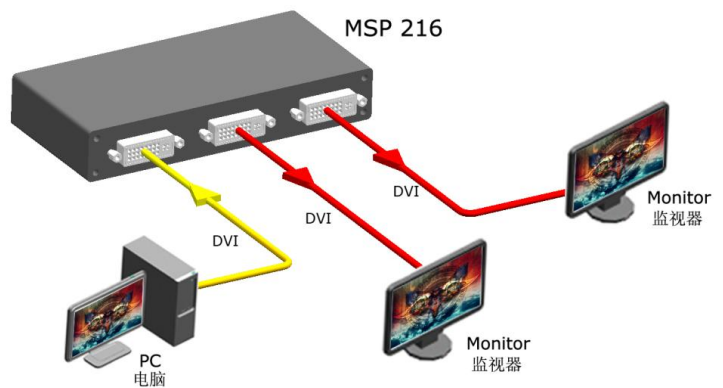

MSP 216 DVI Distributor System Connection Diagram

Packing Configuration


Power Cord



Certification



Hardware Orientation

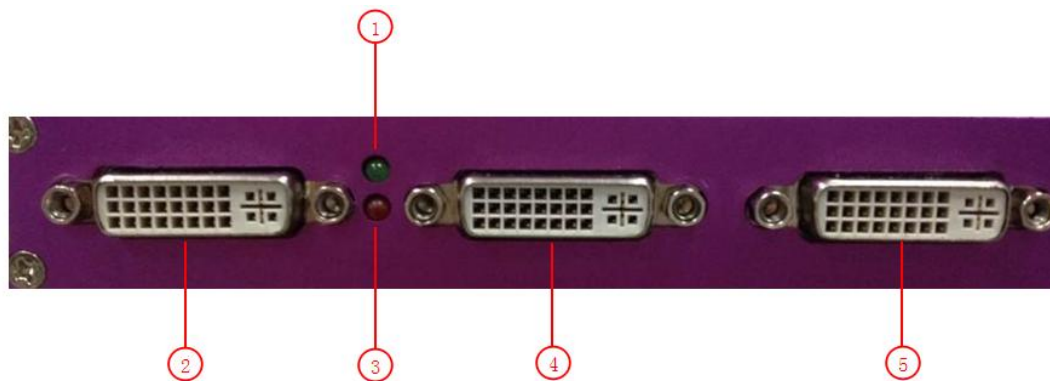

NO.	INTERFACE	NO.	INTERFACE
1	Signal Indicator	3	Power Indicator
2	DVI Input Interface DVI-I Port	4~5	DVI Output Interface DVI-I Port



NO	INTERFACE	NO	INTERFACE
1	Power Interface 12V/3A		

Specification

DVI Input	
Number of Inputs	1
Connector	Standard DVI-I socket
Supported Resolution	VESA: 800*600*60、 1024*768*60、 1024*768*75、 1280*720*50、 1280*720*60、 1280*768*60、 1280*800*60、 1280*1024*60、 1360*768*60、 1366*768*60、 1400*1050*60、 1440*900*60、 1600*1200*60、 1680*1050*60、 1920*1080*50、 1920*1080*60、 1920*1200*60、 2048*1152*60、 2560*812*60、 2560*816*60、 2560*1152*30、 2560*1152*60、 2560*1536*30、 2560*1536*60、 3840*1152*30、 3840*1152*60、 4096*1152*30、 4096*1152*60 STMPE: 480I59.94、 576I50、 720P23.98/24/25/29.97/30/50/59.94/60、 1080P23.98/24/25/29.97/30/50/59.94/60、 1080I50/59.94/60
Signal Level	TMDS pwl, single pixel input,165MHz bandwidth
Format Standard	HDMI 1.3
DVI Output	
Number of Inputs	2
Connector	Standard DVI-I socket
Signal Level	TMDS pw, 165MHz bandwidth
Supported Resolution	VESA: 800*600*60、 1024*768*60、 1024*768*75、 1280*720*50、 1280*720*60、 1280*768*60、 1280*800*60、 1280*1024*60、 1360*768*60、 1366*768*60、 1400*1050*60、 1440*900*60、 1600*1200*60、 1680*1050*60、 1920*1080*50、 1920*1080*60、 1920*1200*60、 2048*1152*60、 2560*812*60、 2560*816*60、 2560*1152*30、 2560*1152*60、 2560*1536*30、 2560*1536*60、 3840*1152*30、 3840*1152*60、 4096*1152*30、 4096*1152*60

	STMPE: 480I59.94、576I50、 720P23.98/24/25/29.97/30/50/59.94/60、 1080P23.98/24/25/29.97/30/50/59.94/60、 1080I50/59.94/60
Extras	
Power Supply	12V DC/3A
Working Environment	0℃~70℃
Stored Environment	10%~90%
Dimensions	139mmX65mmX24mm
Product Warranty	3 years parts and labor warranty