





Key Features

- USB capture video complying with UVC for live streaming
- 4CH HDMI inputs
- 2" TFT display on board to Live preview four inputs
- Auto cut and manual switch (T-Bar)
- 14 transition effects on T-Bar
- Support PIP (Picture-In-Picture)
- Audio offers AFV or Line In mode.
- Support switch between 6-Picture PVW and PGM to HDMI Out
- Control by PC or mobile phone (via APP)
- Compact design
- Logo
- Chroma Key
- PTZ control

Application Diagram

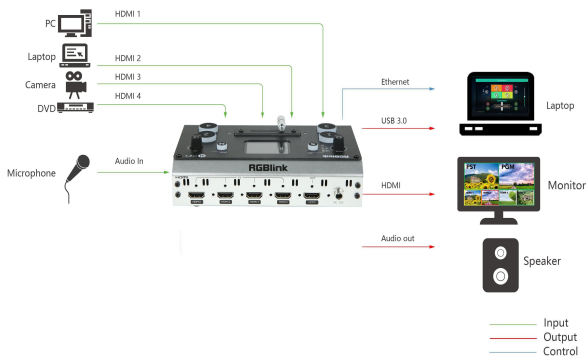

Dimensions

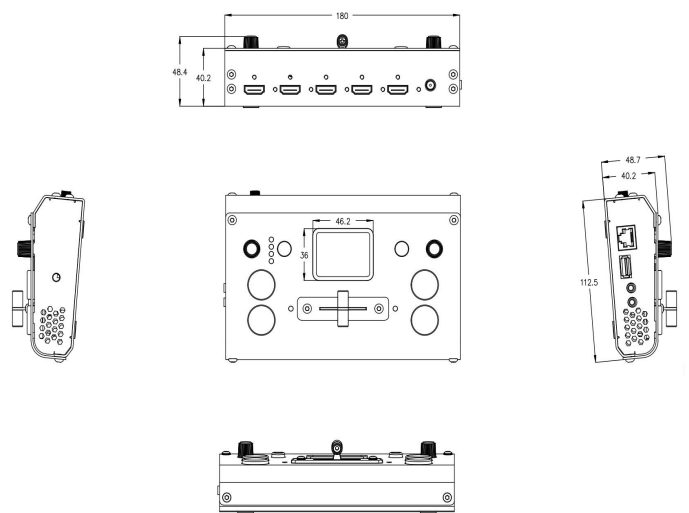

Order Codes

Product Code	Item
230-0001-02-0	mini+
291-0001-03-0	Portable ABS Case

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]
 www.rgblink.com



Specification

Connectors	Input	HDMI In	4×HDMI-A	
	Output	HDMI Out	1×HDMI-A	
		USB 3.0	1×USB TypeA	
	Audio	In	1×3.5mm Stereo Jack	
		Out	1×3.5mm Stereo Jack	
Communication	LAN	1×RJ45		
Power		1×DC Jack		
Performance	Input Resolutions	HDMI		
		SMPTE	720p@50/60 1080i@50 1080p@23/24/30/50/60	
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60	
	Output Resolutions	HDMI		
		SMPTE	720p@50/60 1080p@24/25/30/50/60	
		VESA	1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60 1360×768@60 1920×1080@24/25/30/50/60	
		USB H.265		
			1024×768@60 1280×1024@60 1360×768@60 1920×1080@30 1920×1080@50 1920×1080@60	
	<i>Note: Refer connected computer for applicable resolution support</i>			
Supported Standards	HDMI	1.3		
	USB	3.0		
	H.265	ITU-T H.265/ ISO/IEC 23008-2		
	PTZ	VISCA		
Color Spcae	RGB			
Video Sampling	4:4:4 YUV			
Latency	<4 frames			
Line In Delay	Up to 8 frames			
Power	Input Voltage	DC 12V/1.5A		
	Constant Power	13.2W		
	Max Power	18W		
Environment	Temperature	0℃~70℃		
	Humidity	10%~85%		
Physical	Weight	Net	0.5kg	
		Packaged	1pc	1.25kg
			10pcs	13.00kg
	20pcs		24.00kg	
	Dimension	Net	180mm×113mm×49mm	
		Packaged	1pc	255mm×145mm×85mm
10pcs			490mm×305mm×345mm	
20pcs	565mm×490mm×345mm			

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgbink.com

