

# 4K@60 Input Module



## Key Features

- One 4K input or four 2K inputs
- Support layer scale on input source
- EDID management
- HDCP 2.X compliant
- Brightness and Contrast adjustable
- Four 4K signals cannot work simultaneously, select one to use

## Specification

<b>Connectors</b>	Input	Dual Link DVI	1×DVI-I
		HDMI 1.4	1×HDMI-A
		HDMI 2.0	1×HDMI-A
		DP 1.2	1×DisplayPort
<b>Performance</b>	Input Resolutions	DP 1.2	
		SMPTE	480i   576i   720p@50/59.94/60   1080i@50/50.94/60   1080p@ 23.94/24/25/30/50/59.94/60   2160p@23.94/24/25/30/50/59.94/60
		VESA	800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×1440@60   2560×1600@60   3840×2160@24/24/25/30/50/60
		HDMI 2.0	
		SMPTE	480i   576i   720p@50/59.94/60   1080i@50/50.94/60   1080p@ 23.94/24/25/30/50/59.94/60   2160p@23.94/24/25/30/50/59.94/60
		VESA	800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×1440@60   2560×1600@60   3840×2160@24/24/25/30/50/60
		HDMI 1.4	
		SMPTE	480i   576i   720p@50/59.94/60   1080i@50/50.94/60   1080p@ 23.94/24/25/30/50/59.94/60   2160p@23.94/24/25/30
		VESA	800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×1440@60   2560×1600@60   3840×2160@24/24/25/30
		DVI	
SMPTE	480i   576i   720p@50/59.94/60   1080i@50/50.94/60   1080p@ 23.94/24/25/30/50/59.94/60   2160p@23.94/24/25/30		
VESA	800×600@60   1024×768@60   1280×768@60   1280×1024@60   1600×1200@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×1440@60   2560×1600@60   3840×2160@24/24/25/30		
<b>Physical</b>	Supported Standard	HDMI	2.0   1.4
		DP	1.2
		DVI	Dual Link
	Weight	0.25kg	
	Dimension	212mm×216mm×20mm	

## Order Codes


Product Code	Item
190-0014-04-0	4K@60 Input Module

## Compatibility

This module may be used in the following products

Product Code	Item
310-0014-01-0	X14

## Dimensions

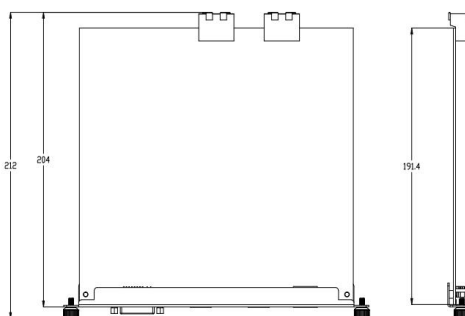

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**  
www.rgbink.com

