

# DV4


## DVI Distribution



### Key Features

- DVI signal distribution, each DVI input can be distributed to 2 DVI outputs
- Compatible with Linsn 801/802, Nova MSD300/600, Mooncell, Colorlight IT7 and Dbstar Q2011 sending cards, 4 install full-color LED sending card slot
- System integration, ingeniously designed
- Adopts air cooling processing, energy conservation and environment protection
- Signal adaptive matching design to solve the problem of high resolution interference and out of sync when distribute signal
- Point-to-point correction technology allows the manufacturers to relax the requirements in LED brightness and color

### Dimensions

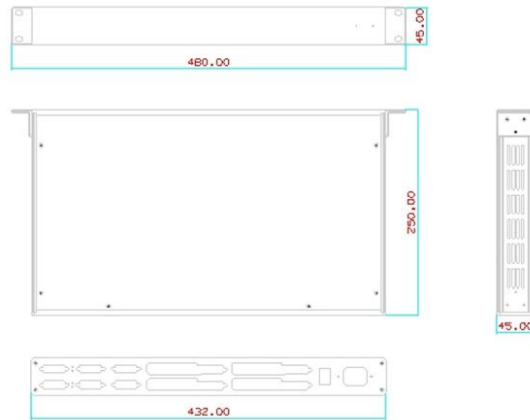


### Specification

Connectors	Input	2 × DVI	
	Output	4 × DVI	
Performance	Input Resolution	DVI:	640x480@60Hz ~ 2048x1152@60Hz ( Depend on the sending card )
	Output Resolution	DVI:	640x480@60Hz ~ 2048x1152@60Hz ( Depend on the sending card )
	Supported Standards	DVI:	1.0
Power	Input Voltage	AC 85~264V, 50/60Hz	
	Max Power	65W	
Environment	Temperature	0°C~45°C	
	Humidity	10%~85%	
Physical	Weight	2.1kg (Net Weight)	
		3.6kg (Package Weight)	
	Dimensions	480mm x 250mm x 45mm (Device Dimension)	
		535mm x 365mm x 135mm (Package Dimension)	

### Order Codes

Product Code	Item
800-0004-01-0	DV4 1U DVI Distributor for 4 Sender Cards

### Application

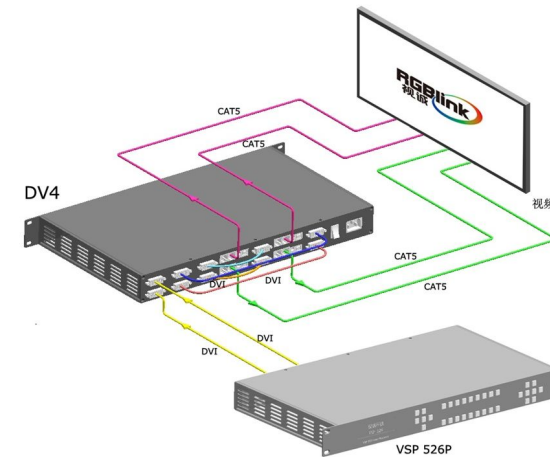

Tel: +86-592-5771197 Fax: +86-592-5788216  
E-mail: sales@rgblink.com http://www.rgblink.com  
Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial  
Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.