


X2





Key Features

- Fully modular Input & Output design, easily configured and maintained
- 16 outputs drive up to 32K1K screen (LCD/LED/Projector)
- Multiple operation mode
- Popular 4K, 3D and HDBaseT input available for 16 inputs.
- H.264 PVW output gives dedicated preview on XPOSE or extended monitoring
- Output rotation with 90° increment(90°/180°/270°)
- OSD (On Screen Display) function available
- Genlock Y and HDMI digital sync input allows X2 keep all outputs synchronizing
- Redundant PSU option

Application

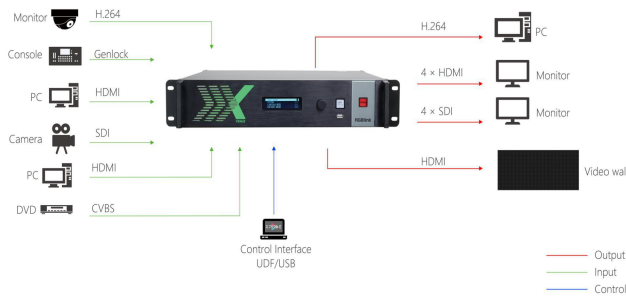

Dimensions

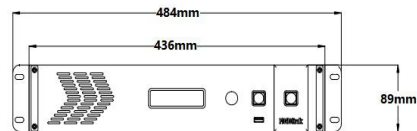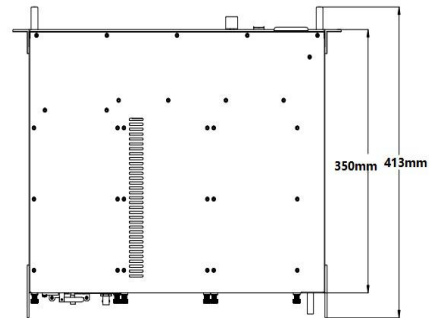

Order Codes

Product Code	Item
310-0002-01-0	X2
190-0002-02-2	Quad HDMI Input Module
190-0002-04-1	Quad SDI Input Module
190-0002-03-0	VGA Input Module 3 x VGA
190-0002-05-0	CVBS Input Module 4 x CVBS
190-0002-10-1	USB Input Module 4 x USB
190-0002-11-0	4K@30Hz Input Module
190-0002-09-0	H.264 IP Streaming Input Module

Product Code	Item
190-0002-06-0	Quad HDBaseT Input Module
190-0002-22-0	Quad HDMI Output Module
190-0002-50-1	IP Streaming Output
190-0002-28-0	Dual H.264 IP Output Module
190-0002-24-0	Quad 3G-SDI Output Module
190-0002-25-0	Quad HDBaseT Output Module
950-0001-00-0	Hot Swappable PSU (200W)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	4 slots, up to 16 inputs <i>Select from</i>		
		HDMI 1.3 Module	4 x HDMI	
		SDI (SD/HD/3G) Module	4 x BNC	
		USB Module	4 x USB	
		CVBS Module	4 x CVBS	
	VGA Module	3 x VGA		
	H.264 Input Module	4 x RJ45		
	4K Module	1 x HDMI&LOOP 1 x DP&LOOP		
	HDBaseT Module	4 x RJ45		
	Output	4slots, up to 16 outputs <i>Select from</i>		
		HDMI 1.3 Module	4 x HDMI	
		SDI (SD/HD/3G) Module	4 x BNC	
		HDBaseT Module	4 x RJ45	
	Preview	1 x HDMI 2 x RJ 45		
	Communication	ULink Control	1x In 1xOut	
		LAN	1xRJ45	
		Genlock	1xBNC 1xHDMI	
	Power	2 slot	2 x IEC	
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.98/24/25/29.97/30 /50/59.94/60 HDMI HDBaseT USB SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1200@60 2048x1152@60 2560x816@60 VGA VESA 800x600@60 1024x768@60 1280x1024@60 1366x768@60 1440x900@60 1600x1200@60 1920x1080@60 HDMI1.4 DP 1.1a SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30 VESA 3840 x 2160@24 3840 x 2160@25 3840 x 2160@30 CVBS SMPTE 480i 576i		
	Output Resolutions	<i>Select from below or configure customized</i> SDI SMPTE 720p@50/59.94/60 1080p@50/59.94/60 HDMI HDBaseT SMPTE 720p@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60		
	Supported Standard	HDMI	1.4	
		SDI	3G	
		DP	1.1a	
		VGA	UXGA	
		HDBaseT	1.1	
		USB	2.0	
		Grey Level	12 bit	
	Features	Max Numbers of	16	
Splicing		16k2k		
Remote Control		XPOSE (Windows/MacOS) OpenAPI T Series Console		
Power	Input Voltage	100V-240V 50/60-Hz auto adjusted		
	Max Power	200W		
Enviroment	Temperature	0℃ ~ 40℃		
	Hudmidity	10%~85%		
Physical	Weight	Nett	12kg	
		Packaged	18kg	
	Dimension	Nett	484mm*413mm*91mm	
		Packaged	630mm*595mm*255mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink[®]



Specifications are correct at time of printing and subject to change or alteration without notice.

www.rgblink.com