

RMS 1516S

4K Preview Monitor



RMS 1516 with Desktop Accessory


Key Features

- Up to 4 pictures to display
- Focus Assist
- Pseudo-color
- Overscan
- Rotation by 90° increment
- Monochrome display (Red, Green, Blue,Grey)
- Image Freeze
- Zoom All
- Pixel to Pixel
- Center Marker
- Ratio Marker (80%, 85%, 90%, 93%, 96%, 2.35:1)
- Marker Color (Red,Green,Blue,White)
- Color Temperature Adjustment
- 3 Tally light (Red, Green, Yellow)

Application



Dimension

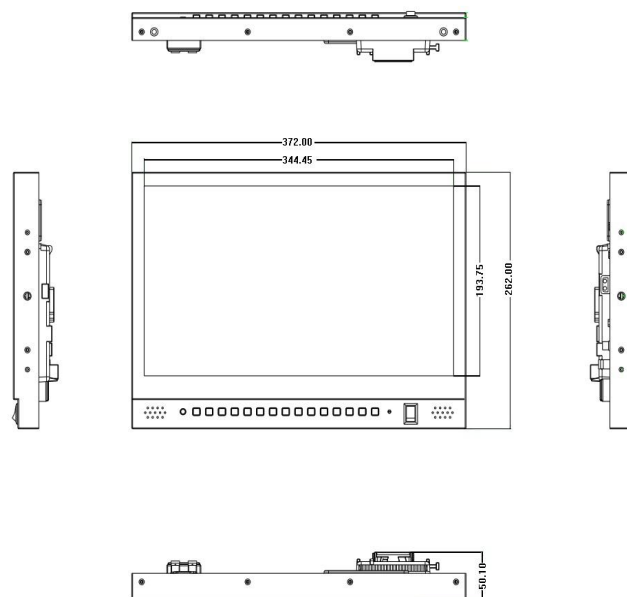

Order Codes

Product Code	Item
400-1516-01-0	RMS 1516S

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink®

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	VGA	1×DB15
		DVI	1×DVI-I
		SDI	2×BNC (1 In 1 Loop)
		HDMI	4×HDMI-A
	Audio	L/R	2×RCA
	Communication	Tally	1×DB9
	Power		1×4Pin XLR
Performance	Input Resolutions	VGA	
		VESA	640×480@60 800×600@60 1024×768@60 1280×1204@60 1600×1200@60 1920×1080@60
		DVI	
		SMPTE	480i@60 480p@60 576p@50 720p@50/60 1080i@50/60 1080p@50/60
		VESA	640×480@60 800×600@60 1024×768@60 1920×1200@60 1280×1204@60 1440×1440@60 1440×1530@60 1523×1536@60 1600×1200@60 2048×1152@60 2560×816@60
		SDI	
		SMPTE	480i 576i 720p@23.98/24/25/29/30/50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
		HDMI	
		SMPTE	480i 576i 720p@23.98/24/25/29/30/50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
		VESA	2160p@23.98/24/25/29.97/30/50/59.94/60
			800×600@60 1024×768@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1400×900@60 1600×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×812@60 2560×816@60 2560×1600@60 3840×1080@60 3840×2160@60
	Supported Standard	VGA	UXGA
		DVI	Single Link
		SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI
		HDMI	2.0
Features	Screen Size	15.6 Inch	
	Native Resolution	3840x2160px	
	Native Display Ratio	16: 9	
	Contrast	800:1	
	Viewing Angle	85°/85°(L/R) 85°/85°(U/D)	
	Brightness (Max)	300cd/m2	
Power	Input Voltage	DC 12V (via fitted universal plug-in pack)	
	Max Power	18W	
Environment	Temperature	-10°C ~ 50°C	
	Hudmidity	10%~85%	
Physical	Weight	Net (Device)	2.03kg
	Dimension	Net (Device)	372mm×262mm×50mm

