





Key Features

- Module based design for wide range in/out request
- Module hot swappable
- Preview 4 inputs
- Seamless switching between PST and PGM
- Multiple audio outputs available
- 2 video layers plus additional layers for OSD, LOGO, STILL
- Mask for foreground layer including support for user defined mask
- Compatible with all kinds of Digital Displays
- Genlock Y In
- Multiple Presets and savable to the external USB disk
- 14 Transition Effects on the T-bar and TAKE button
- PTZ VISCA control compatible
- Streaming PGM output via optional USB 3.0 output module

Application

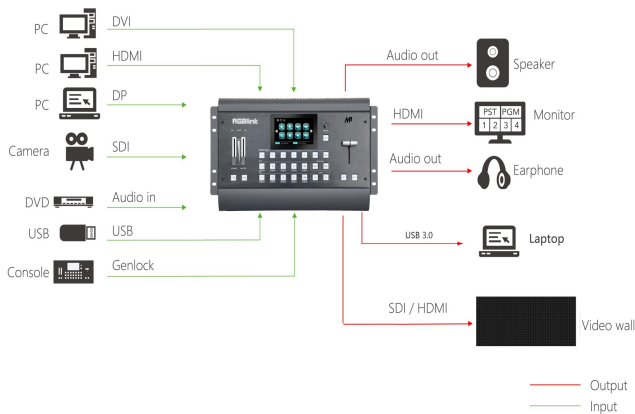

Dimensions

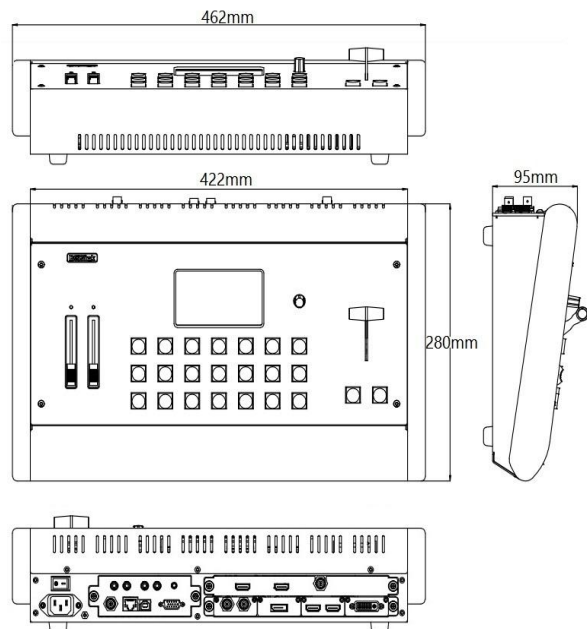

M1 with optional fitted wings/sides

Order Codes

Product Code	Item
220-0001-01-0	M1
220-0001-02-0	M1 (with HDMI Output 4×HDMI Input)
220-0001-03-0	M1 (with HDMI Output 4×DVI Input)
290-0001-01-0	Output Module PGM HDMI/SDI PVW HDMI
290-0001-02-0	Output Module PGM HDMI PVW HDMI (Standard)
290-0001-03-0	Output Module PGM HDMI/SDI/USB 3.0 PVW HDMI
290-0001-05-0	Output Module PGM HDMI/USB 3.0 PVW HDMI

Product Code	Item
190-0001-04-2	Single DVI Input Module
190-0001-07-2	Single 3G-SDI Input/Loop Module
190-0001-10-2	Single USB2.0 Input/Backup Module
190-0001-13-2	Single HDMI Input Module
930-0002-01-0	Wings/Sides for M1 (Pair)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.



www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	<i>1 slots up to 4 single inputs , select from</i>		
		DVI Module	1×DVI-I (compatible with DVI/VGA/YPbPr/CVBS)	
		HDMI Module	1×HDMI-A	
		SDI Module	2×BNC (1 In 1 Loop)	
		USB Module	2×USB (1 In 1 backup)	
	Output	<i>1 slot,select from</i>		
	With SDI	2×HDMI-A 1×BNC		
	Without SDI	2×HDMI-A		
	With USB 3.0/SDI	2×HDMI-A 1×BNC 1×USB-A		
	With USB 3.0 without SDI	2×HDMI-A 1×USB-A		
Audio	IN L/R	2×RCA		
	OUT L/R	2×RCA		
	OUT	1×3.5mm Stero Jack		
Communication	LAN	1×RJ 45		
	Tally	1×DB15		
	USB	1×USB-B		
	Genlock Y	1×BNC		
Power		1×IEC		
Performance	Input Resolutions	SDI		
		SMPTE	480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60	
		DVI HDMI		
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60	
	VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60		
Output Resolutions	<i>Select from below or customized</i>			
	SDI			
	SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60		
	HDMI			
	SMPTE	720p @50/59.94/60 1080p@50/59.94/60		
VESA	1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60			
USB 3.0 (follow HDMI)	1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60			
Supported Standards	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI		
	HDMI	1.3		
	DVI	Single Link		
	USB	3.0		
Features	Layers	2		
	MASK Edit	Support		
	Brightness	Standard range		
	EDID Management	Yes		
Power	Input Voltage	AC 85V-264V, 50/60Hz		
	Max Power	120W		
Enviroment	Temperature	0- 55°C		
	Humidity	10% - 90%		
Physical	Weight	Net	5.5g	
		Package	8kg	
	Dimensions	Net	462mm×280mm×95mm	
		Package	585mm×410mm×205mm	

