

T1



Control Consoles

RGBlink[®]

T1

Take control of large events with T1, putting full power of control with the programmer and operator. T1 features an integrated 14in LCD touch screen front and centre, with an impressive number of illuminated keys, dynamically lit and many with dedicated electronic legends for superior visibility.

Connect X3 or X7 processors to T1 enabling hands on remote control, utilising the power of the RGBlink XPOSE platform. T1 is XPOSE with console surface. This enables fluid and demand based actions like never before when using compatible universal processors.


Positioning and sizing layers and outputs and other features can be achieved in a manner that is most familiar to the user, whether via touch screen, keypad or precision joystick.

From programming layouts to controlling live, T1 is intuitive and opens up a wide range of possibilities in new ways.



Application Examples

Large Stage Event

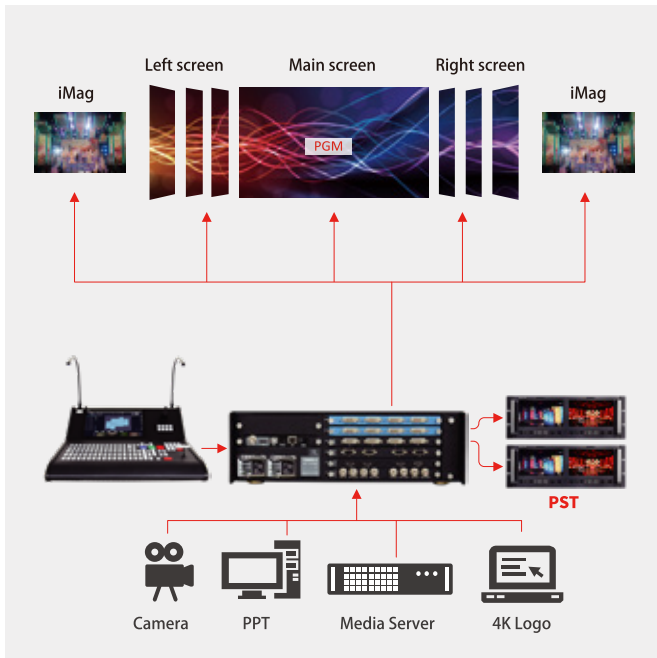

Preset Bank 1
 Camera 1 | Video Full Stage Mapped | Camera 1

Preset Bank 2
 Camera 1 | Video A | Presentation | Video A | Camera 1


Presets
Preset Bank 3
 Camera 1 | Video A Left | Presentation | Video A Right | Camera 1

Shortcuts
Preset Bank 4
 Camera 1 | Video A Left | Presentation | Video B Right | Camera 1

Preset Bank 5
 Camera 1 | Video | Camera 1

T-Bar

Large Concert Event

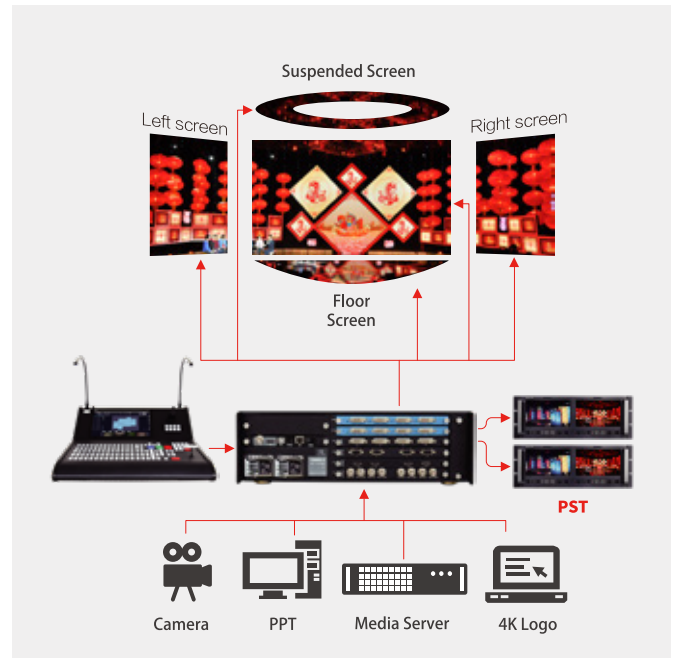

Preset Bank 1
 Video A
 Full Stage Mapped Display


Preset Bank 2
 Video A Left | Video B | Video A Right

Preset Bank 3
 Video A Left | Video B | Video A Floor | Video B Right


Preset Bank 4
 Video B Left | Video B Centre | Video A Floor | Video B Right

Application Examples


16 Mega Pixel Big Screen

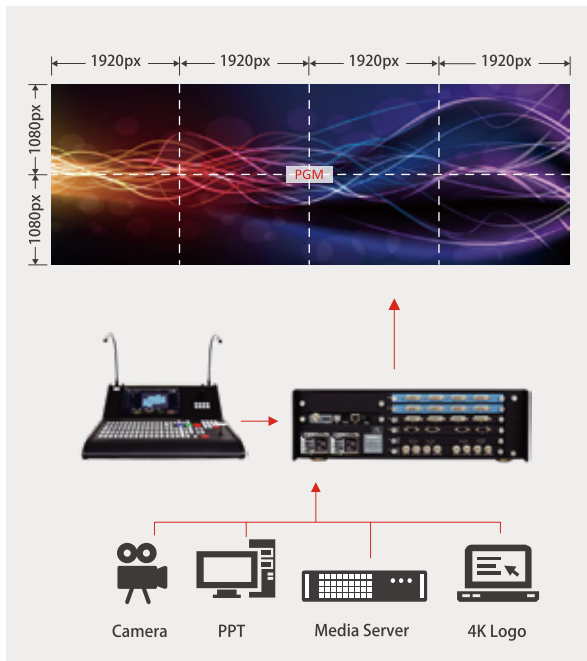


Preset Bank 1

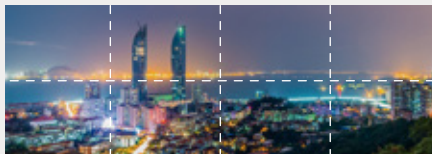


Preset Bank 2

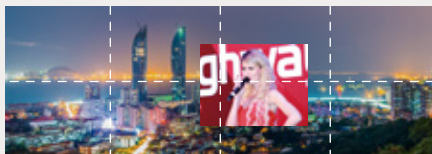


Preset Bank 3

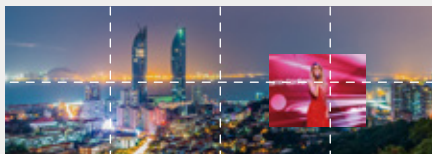


Preset Bank 4

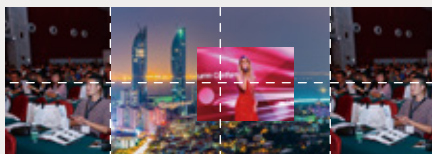


Multi Device System

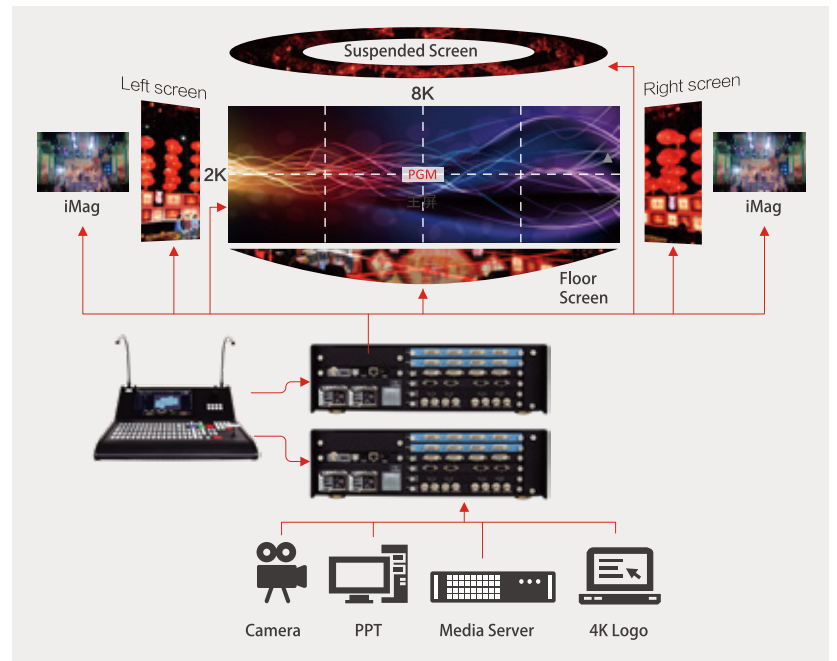


Preset Bank 1

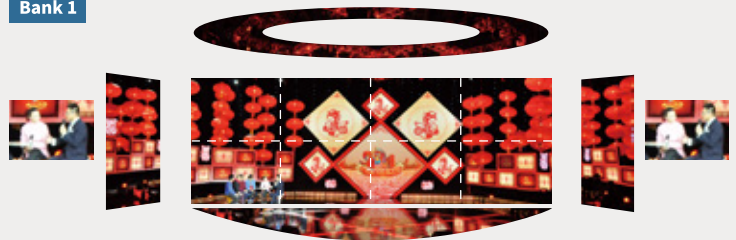


Preset Bank 2

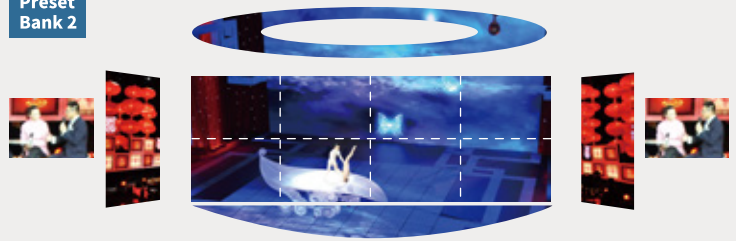

Preset Bank 3

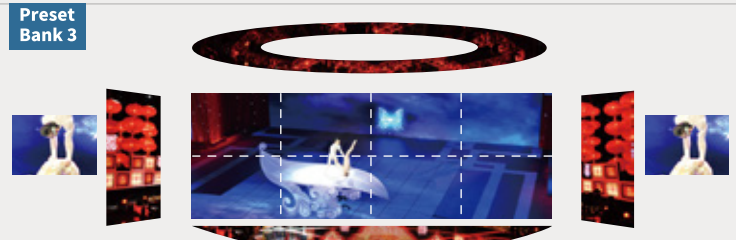

Preset Bank 4

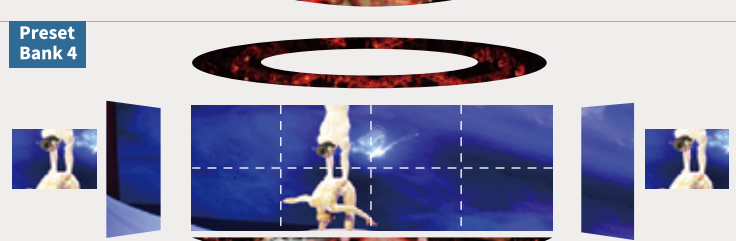



Presets

Load presets into preset banks, accessing with dedicated page controls. Illuminated buttons provide not only immediate access but also coloured feedback indicating status.

Functions

Assign functions dynamical to illuminated keys. Electronic legends above each key show the assigned function. Page controls allow an even greater number of functions to be easily accessible from the console is required.

Input, Layer & Output

Three sets of 16 individually illuminated keys, all with separate electronic LCD displays above can be assigned specific inputs, layers and outputs for immediate selection and access. Key colours indicate the current status of the assigned attribute. For access to additional attributes, Page keys are provided for each section also.

Connectivity

At the heart of T1 is connecting one or more universal processors for remote and tactile control.

T1 supports connection of up to four X3 processors or a single 32x32 X7 processor.

Universal processors may be connected via a LAN/ethernet connection, or via USB or serial, offering a wide range of choices to users.



Synchronised Control


All connectivity and video is synchronised whether single or multi device systems. T1 brings together not only live control, but also enables large scale control.

Multi-Touch Display

T1 features a interactive LCD display where the RGBlink XPOSE app platform comes to life. XPOSE is embedded in T1 offering the full set of features and allowing users to operate and control in the most natural way.

Precision Controls


Dedicated numeric keypad and XYZ high precision joystick are just two of the control surface features included to assist operators. The interfaces provide fast, fluid and accurate settings from resolution, sizing and positioning, across a host of settings.

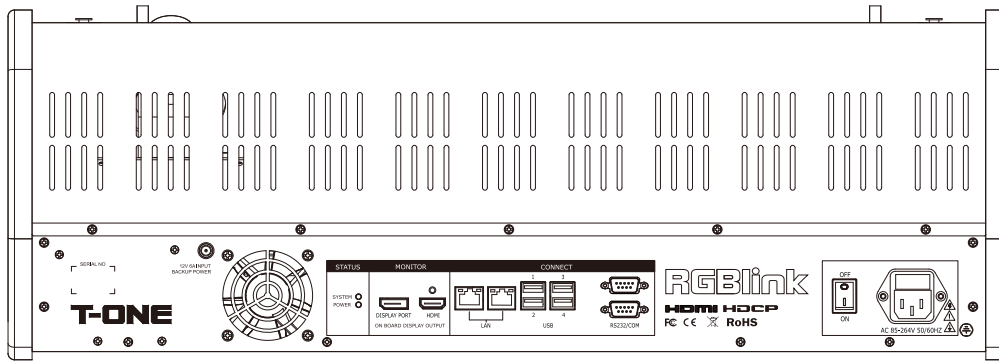

Specifications

Features	Connectivity	Remote control for up to four X3 or one X7 universal processor	
	Display	14" Multi Touch LCD	
	Joystick	Precision Joystick with XY and Z axis control, self-centring	
	T-Bar	Mixing/Transition control	
	Buttons	Tactile illuminations buttons for key features and attributes. Assignable buttons with LCD electronic legending Dedicated numeric pad	
	Desk Lamps	2 positions (gooseneck lamps sold separately)	
	Connectors	Connect/Control	2 x RJ45 LAN/Ethernet 4 x USB A USB 2 x D-SUB 15 Serial
External Display		1 x DisplayPort	
Monitor		1 x HDMI	
Desk Lamp		2 x 3pin XLR	
Power		1 x IEC 1 x 5.4mm DC Socket	
Power		Mains Input	AC 85~264V 50/60Hz
		Input Back Up	12V 5A
	Max Power	205W	
Operation	Temperature	-25°C ~ 90°C	
	Humidity	10% ~ 90% RH	
Physical	Dimensions	625mm x 598mm x 227mm T--ONE 620mm x 668mm x 350mm Flightcase	
	Weight	16kg T-ONE	
		35kg Packed in Flightcase	

Dimensions

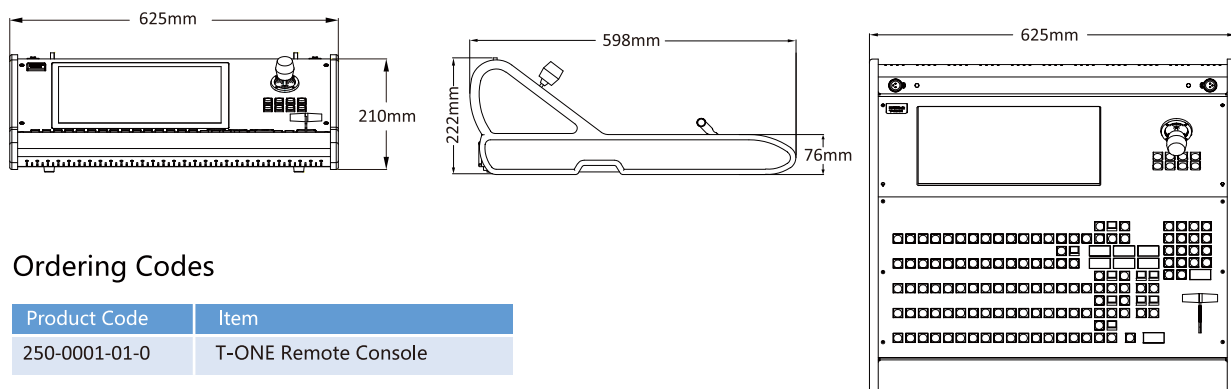

Ordering Codes

Product Code	Item
250-0001-01-0	T-ONE Remote Console

WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197
Proudly designed and manufactured in **Xiamen Hi Technology Zone, China**

RGBlink[®]



www.rgblink.com