

MSP 319

1x4 SDI Distributor




Key Features

- Miniature size
- YUV 4:4:4 10bit/12bit
- Automatically detects SD, HD and 3G-SDI
- Reclocked function
- Cable equalization


Specification

Connectors	Input	SDI	1xBNC
	Output	SDI	4xBNC
Performance	Supported Input Resolutions	SMPTE 525i @59.94 625i@50 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.98/24/25/29.97/30	
	Supported Output Resolutions	SMPTE 525i @59.94 625i@50 720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.98/24/25/29.97/30/50/59.94/60	
Power	Input Voltage	USB 5V DC 5-17V	
	Environment	Working Temperature	-20°C~60°C
		Storage Temperature	-30°C~70°C
		Humidity	0%~90%
Physical	Weight	Nett	0.51 kg
	Dimensions	Nett	26x104x25mm

Application

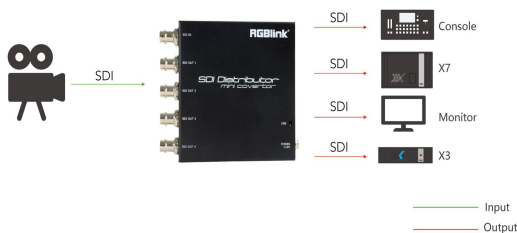

Dimension

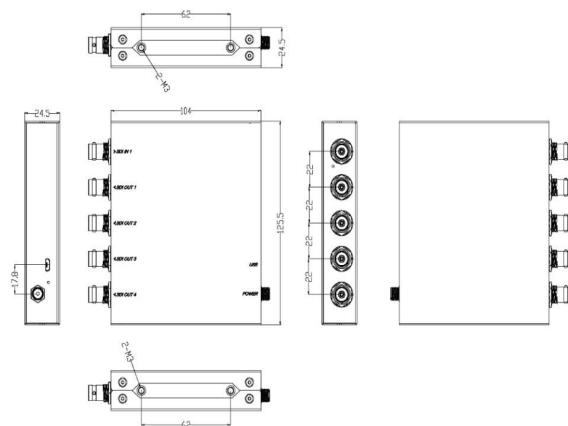

Order Codes

Product Code	Item
621-0219-04-0	MSP 319

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.