

G3 NET 2K


The only piece of equipment required between the video source and the LED display.



Key Features

- LED Display
- Seamless Switching
- Instant TAKE
- Built-in Monitoring
- Preview Output
- PIP, Scale and Map
- Test Patterns
- Art-Net On Board
- Custom Button
- EDID Management
- Direct LED Connection

Dimensions

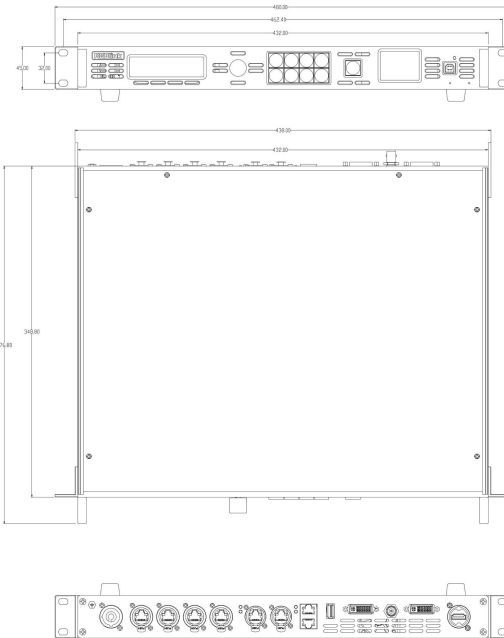


Specification

Connectors	Inputs	Input Video: 1 × DVI 1 × HDMI 1 × 3G-SDI
	Outputs	Preview Out: 1 × DVI
	Communication	LAN Output: 4 × RJ45
	Ports	USB 2.0 LAN TCP/IP, Art-Net, RS232
Performance	Input Resolution	SDI: 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60 1080psf@23.98/24/25/29.97/30 480i 576i
		DVI&HDMI: SMPTE: 625@25/50 PAL 525@29.97/59.94 NTSC 720p@50/59.94/60 1080p@50/59.94/60 1080i@50/59.94/60 VESA: 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x816@60
	Output Resolution	SMPTE: 1080p@50/59.94/60 720p@50/59.94/60 1280x720@23.98/24/25/29.97/30 1920x1080@23.98/24/25/29.97/30 VESA: 800x600@60 ~ 2560x816@60
	Refresh Rates	23.98 29.97 30 50 59.94 60 75
	Supported Standards	SDI: SMPTE 425M (Level A) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI
		DVI: 1.0
HDMI: 1.3		
Power	Input Voltage AC 85~264V 50/60Hz Max Power 35W	
Environment	Temperature -20℃~65℃	
	Humidity 20%~90%	
	Weight 3.3kg (Net Weight)	
Physical	Weight 3.3kg (Net Weight)	
	Dimensions 480mm x 377mm x 45mm (Device Dimension)	

Order Codes

Product Code	Item
820-0222-01-0	G3 NET 2K w/2 ColorLight Sender Card
820-0222-02-0	G3 NET 2K w/2 Linsn Sender Card
820-0422-01-0	G3 NET 4K w/2 ColorLight Sender Card
820-0422-02-0	G3 NET 4K w/2 Linsn Sender Card

Application

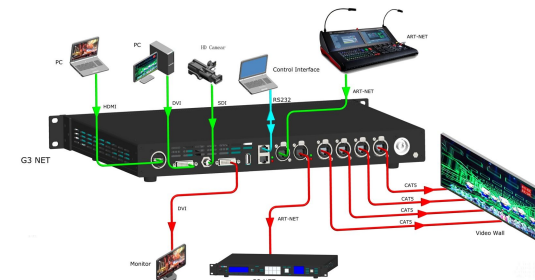

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.