

# RMS 8424S


## Preview Monitoring



### Key Features

- Standard 4 unit rack mount size
- 8 inch LCDx2
- 1024x3 (RGB) x600
- 16:9 / 4:3 adjustable
- SDI/HDMI embedded audio output via 3.5mm earphone socket
- Support SDI/DVI audio output for speaker
- TALLY light for each LCD unit
- Underscan/Overscan switch
- Customer editable video title
- Auto input standard detection

### Dimensions

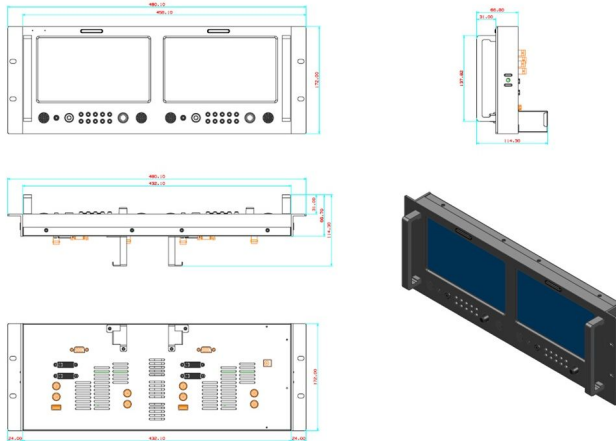


### Specification

Connectors	Input	2 x DVI 2 x CVBS 2 x SDI — SDI Option Module	
	Loop	2 x DVI 2 x CVBS 2 x SDI — SDI Option Module	
Communication	Tally	D-SUB15	
Ports	USB	USB-A	
	Input Resolution	SDI*:	480i@60   576i@50   720p@50/60   1080i@50/60   1080p@50/60 SMPT: 480i@60   480p@60   576p@50   720p@50/60   1080i@50/60   1080p@50/60 VESA: 640x480@60   800x600@60   1024x768@60   1280x1204@60   1440x1440@60   1440x1530@60   1523x1536@60 1600x1200@60   1920x1200@60   2048x1152@60   2560x816@60   2688x896@60   2700x1000@60   2800x990@60 2900x959@60   2986x931@60   3840x670@60   3840x733@60
DVI:		640x480@60   800x600@60   1024x768@60   1280x1204@60   1600x1200@60   1920x1200@60	
Performance	Supported Standards	SDI*:	SMPT: 422, SMPT: 259M-C, SMPT: 292M
		VGA:	VGA-UXGA
		HDMI:	1.3
		CVBS:	PAL/NTSC
LCD Displays	Quantity	2	
	Size	8"	
	Native Resolution	1024x600px	
	Native Display Ratio	16:9	
	Contrast	700:1	
	Viewing Angle	140°x140°	
	Brightness (max)	500cd/m2	
Display Refresh	15KHz – 120KHz		
Power	Input Voltage	12V DC (via fitted universal Plug Pack)	
	Max Power	24W	
Environment	Temperature	0°C~40°C	
	Humidity	10%~85%	
Physical	Weight	3.4kg (Nett) 3.8kg (Packed)	
	Dimensions	480mm x 172mm x 114mm (Device)	
		545mm x 240mm x 170mm (Packed)	

### Order Codes

Product Code	Item
400-8424-01-0	Dual LCD Preview Monitors
400-8424-02-0	Dual LCD Preview Monitors w/SDI
490-5353-01-0	SDI Input Module Option

### Application

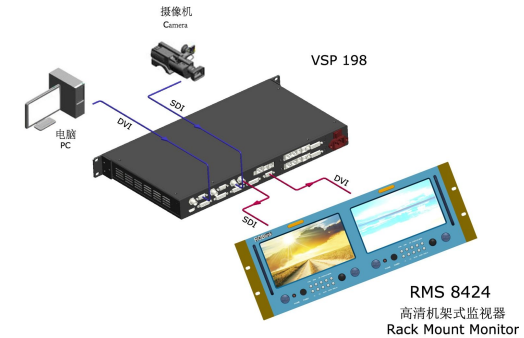

Tel: +86-592-5771197 Fax: +86-592-5788216  
 E-mail: sales@rgblink.com http://www.rgblink.com  
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial  
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.