


MSP ENCODERS

MSP 225 HDMI to H.264

This compact convertor provides encoding of HDMI signals to H.264 internet streaming video over IP. Now any video can be streamed to a connected website for viewing, expanding the reach possibilities. MSP225 offers two HDMI input channels and dual RJ45 connectors for IP output and connection to LAN/WAN.


Configuration of MSP 225 is made via a web browser interface, providing settings for encoding formats and connection settings for web applications.

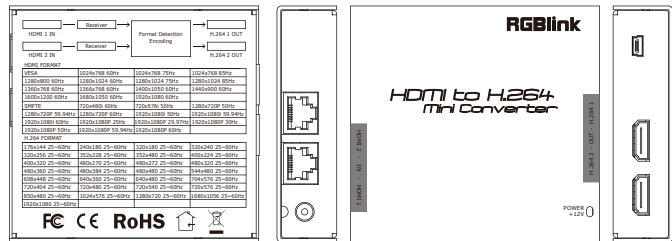

MSP 226 H.264 to HDMI

Easy connection of internet web streams to conventional video processing and display equipment is enabled with MSP 226. Connect H.264 internet streaming via IP to large displays with this decoder. MSP226 offers two HDMI output channels and dual RJ45 connectors for IP input for connection from LAN/WAN.

Configuration of MSP 226 is made via a web browser interface, providing settings connection to web applications and video streams.

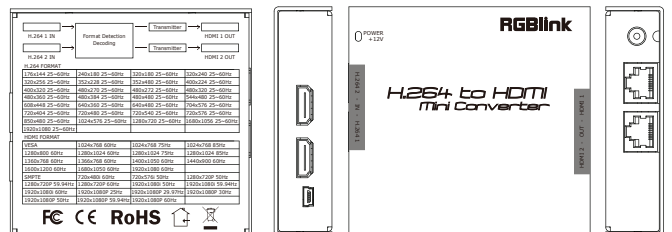

MSP 225 Specifications

Connectors	Inputs	2 × HDMI
	Outputs	2× RJ45 (H.264)
	Remote Control	USB
	Power	5.4mm DC Socket
Performance	Input Resolution	VESA 1024x768 1280x800 1280x1024 1360x768 1366x768 1400x1050 1440x900 1600x1200 1680x1050 1920x1080 SMPTE 480i 576i 720p 1080i 1080p
	Output Resolution	176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x384 480x480 544x480 608x448 640x360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080
	Refresh Rates	25 29.97 30 50 59.94 60 75 85
	Support Standard	HDMI: 1.3
Power	Input Voltage	12V DC (via universal Plug Pack)
	Max Power	1A
Environment	Temperature	0 °C~45 °C
	Humidity	10%~85%
Physical	Weight	0.17kg (Net Weight)
	Dimensions	98mm x 93mm x 23.5mm (Device Dimension)

MSP 226 Specifications



Connectors	Inputs	2× RJ45 (H.264)
	Outputs	2× HDMI
	Remote Control	USB
	Power	5.4mm DC Socket
Performance	Input Resolution	176x144 240x180 320x180 320x240 320x256 352x228 352x480 400x224 400x320 480x270 480x272 480x320 480x360 480x384 480x480 544x480 608x448 640x360 640x480 704x576 720x404 720x480 720x540 720x576 850x480 1024x576 1280x720 1680x1056 1920x1080
	Output Resolution	VESA 1024x768 1280x800 1280x1024 1360x768 1366x768 1400x1050 1440x900 1600x1200 1680x1050 1920x1080 SMPTE 480i 576i 720p 1080i 1080p
	Refresh Rates	25 29.97 30 50 59.94 60 75 85
	Support Standard	HDMI: 1.3
Power	Input Voltage	12V DC (via universal Plug Pack)
	Max Power	1A
Environment	Temperature	0 °C~45 °C
	Humidity	10%~85%
Physical	Weight	0.17kg (Net Weight)
	Dimensions	98mm x 93mm x 23.5mm (Device Dimension)

Order Codes

ProductCod	Item
600-0225-01-0	HDMI to H.264 Converter
600-0226-01-0	H.264 to HDMI Converter



Dimensions

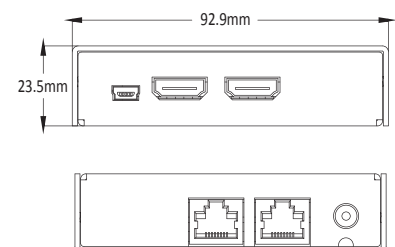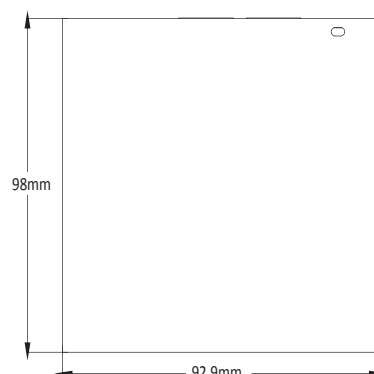

WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197

Proudly designed and manufactured in **Xiamen Hi Technology Zone, China**

