

MSP 314-4




Key Features

- Resolution up to 3840x2160@ 30Hz
- 1xLC connector on both transmitter and receiver
- Transmit 2000m by Single Mode Fiber
- EDID storage
- Resist electromagnetic interference
- Easy installation


Specification

Connectors	Input	Transmitter	1xDVI
	Output	Receiver	1xLC
Performance	Input Resolution	Transmitter	1xLC
		Receiver	1xDVI
	Output Resolution	Transmitter	1xLC
		Receiver	1xDVI
Supported Standard	DVI	SMPTE	480i@60 576i@60 720p@50/60 1080i@50/60 1080p@50/60
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 3840x2160@30
	DVI	SMPTE	480i@60 576i@60 720p@50/60 1080i@50/60 1080p@50/60
		VESA	800x600@60 1024x768@60 1280x768@60 1280x1024@60 1360x768@60 1400x1050@60 1440x900@60 1600x1200@60 1680x1050@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 3840x2160@30
Power	Input Voltage	5V DC	
Physical	Weight	0.12kg	
	Dimension	70mmx40mmx15mm	

Application

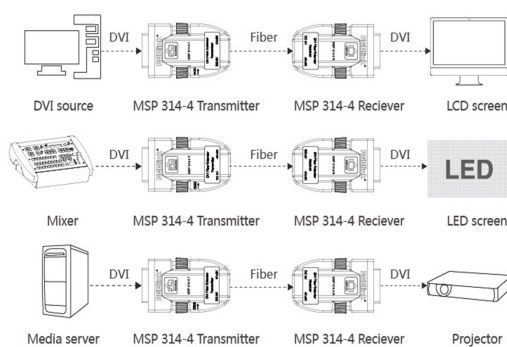

Dimension

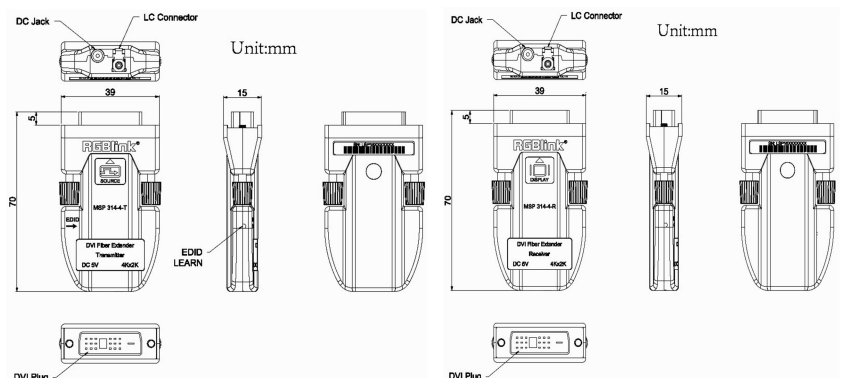

Order Codes

Product Code	Item
611-0011-01-0	MSP 314-4

MSP 314-4 Transmitter

MSP 314-4 Receiver

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

RGBlink®
www.rgbink.com



Specifications are correct at time of printing and subject to change or alteration without notice.