

MSP 203


Best bridge for broadcasting SDI to HDMI application!



Key Features

- 3G-SDI, HD-SDI and SD-SDI
- HDMI 1.3 or DVI 1.0
- Embedded audio
- Separate L/R analog or digital AES/EBU inputs
- Automatic identification for input format
- DIP switch
- Remote configuration by USB

Dimensions

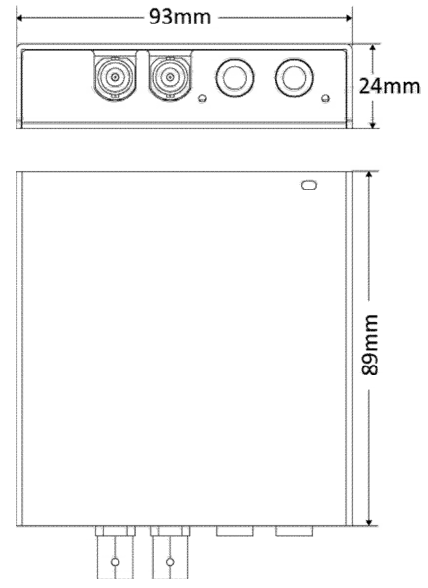


Specification

| | | |
|-------------|---------------------|---|
| Connectors | Input | 1 × SDI (with loop) |
| | Audio Input | 2 × Analog audio |
| | Output | 1 × HDMI |
| Power | Power | 5.4mm DC Socket |
| | Input Voltage | 12V DC (via universal Plug Pack) |
| | Max Power | 1.5A |
| Performance | Input Resolution | SDI: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 |
| | Output Resolution | HDMI: 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 |
| | Supported Standards | SDI: ITU-R BT.656, ITU-R BT.601, SMPTE 259M, SMPTE 292, SMPTE 297 HDMI: 1.3 |
| Environment | Temperature | 0°C~45°C |
| | Humidity | 10%~85% |
| | Weight | 0.2kg (Net Weight) 0.5kg (Package Weight) |
| Physical | Dimensions | 98mm x 92.9mm x 23.5mm (Device Dimension) 170mm x 120mm x 80mm (Package Dimension) |

Order Codes

| Product Code | Item |
|---------------|--------------------|
| 600-0203-01-0 | MSP 203 SDI HDMI |

Application

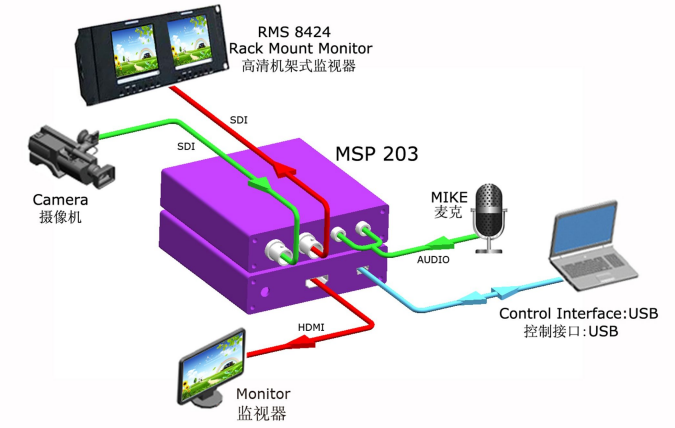

Tel: +86-592-5771197 Fax: +86-592-5788216
 E-mail: sales@rgblink.com http://www.rgblink.com
 Headquarter: S601~604, 606, 607, 504 Weiye Building Torch Hi-Tech Industrial
 Development Zone, Xiamen, Fujian Province, P.R.C



Specifications are correct at time of printing and subject to change or alteration without notice.