


# H.264 Input Module

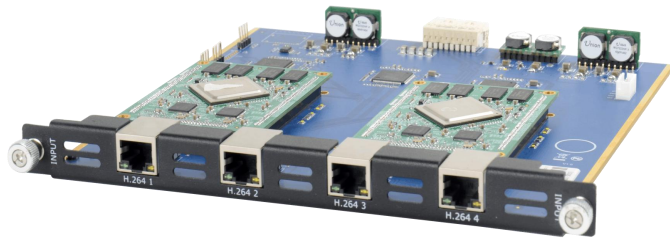

## Key Features

- Up to 4 independent H.264 Video Streaming Inputs
- Supports All standard H.264 Signals
- Supports Videos up to 60fps
- Configure from XPOSE


## Specification

<b>Connectors</b>	Input	4×RJ45
<b>Performance</b>	Input Resolutions	H.264 176x144@60   240x180@60   320x180@60   320x240@60   320x256@60   352x228@60   352x480@60   400x224@60   400x320@60   480x270@60   480x272@60   480x320@60   480x360@60   480x384@60   480x480@60   544x480@60   608x448@60   640x360@60   640x480@60   704x576@60   720x404@60   720x480@60   720x540@60   720x576@60   850x480@60   1024x576@60   1280x720@60   1680x1056@60   1920x1080@60
	Supported Standard	H.264/MPEG-4 AVC
	Decoding Protocol	H.264 baseline/main/high profile L5.0\MPEG4 SP L0-3\ASP L0-5\MJPEG/JPEG baseline
<b>Physical</b>	Weight	0.225kg
	Dimension	216mm×220mm×20mm

## Order Codes

Product Code	Item
190-0003-13-0	H.264 Input Module

## Dimensions

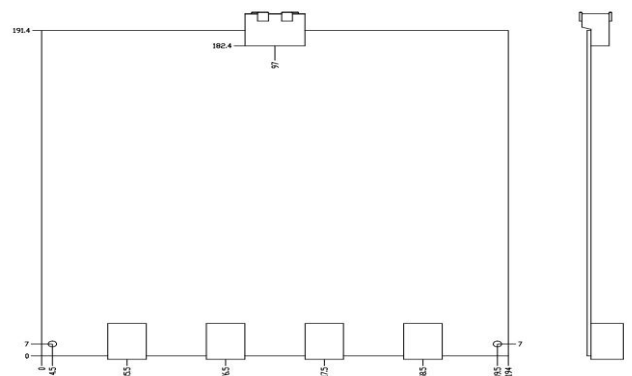

## Compatibility

This module may be used in the following products

Product Code	Item
310-1003-11-0	X3P
310-0007-00-1	X7

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com  
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**<sup>®</sup>

www.rgbink.com

