

TAO 1pro




Key Features

- 5.5 inch HD touch screen for operation
- Network HD streaming
- Seamless switcher
- Asynchronous rotation of main screen and HDMI output
- 2*UVC inputs,2*HDMI 1.4 input and 1* HDMI 2.0 output
- Bluetooth 5.0
- NDI 5.0 encoder
- Support image function:oscillograph,vectorgraph histogram,etc
- Sound column
- Recording via USB 2.0 port,SD card stores up to 2T
- Multistream up to 4 Live Streaming platform Simultaneously
- Compatible with SONY NF970 and Panasonic AG-VBR59MC standard battery socket (no battery install for standard version)

Application



Dimension

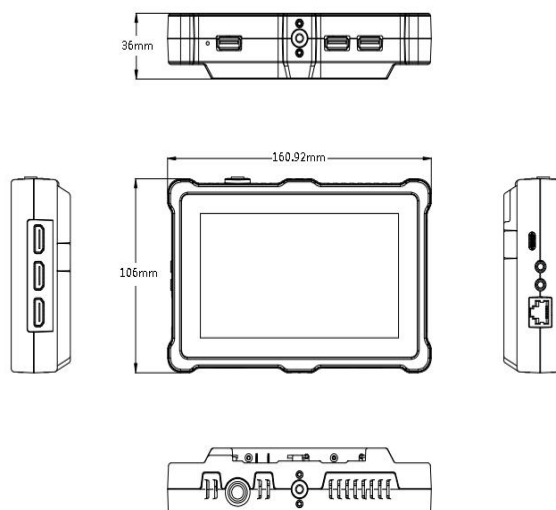

Order Codes

Product Code	Item
410-5513-01-0	TAO 1pro
490-5513-01-0	TAO 1pro lithium battery(optional)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®

www.rgbink.com



Specification

Connectors	Input	HDMI 1.4	2×HDMI-A
		USB 3.0	2×USB TypeA
	Output	HDMI 2.0	1×HDMI-A
	Record	USB 2.0	1×USB TypeA
	Audio	In	1×3.5mm Audio Jack
		Out	1×3.5mm Audio Jack
Performance	Communication/Stream	LAN	1×RJ45
	Power		1×USB-C
	Input Resolutions	HDMI	
		SMPTE	720p@60 1080p@60
		VESA	640×480@60 1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1920×1080@60 1920×1200@60
	Output Resolutions	HDMI	
Power		SMPTE	720p@50/60 1080i@50 1080p@23/24/30/50/60 1440p@60 2160p@60
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1440×900@60 1600×1200@60 1680×1050@60 1920×1080@60 3840×2160@60
	Supported Standard	HDMI	2.0
		USB	3.0
	Input Voltage	9V /2A	
	Max Power	18W	
Environment	Temperature	0℃~55℃	
	Humidity	5%~85%	
Physical	Weight	Net	0.46kg(without battery);1.05kg(with battery)
		Package	0.78kg
	Dimension	Net	161mm×106mm×36mm
		Package	255mm×145mm×85mm

