

RGB20X-POE-WH 20X PTZ Camera(PoE)



Front View



Rear View

Key Features

- High speed optical zoom
- High performance in low light scenarios with Wide Dynamic Range
- Full 1920×1080p HD Resolutions up to 60 frames per second
- H.265/H.264 Dual Stream Output Adapted to Different Network Environments
- Pan and Tilt Control
- Wide Application
- Low-power Sleep Function
- Support PoE(IEEE 802.3af 48V)


Specification

Connectors	Video(Output)	HDMI SDI LAN(Support PoE)	1×HDMI-A 1×BNC 1×RJ45
	Audio	Input	1×3.5mm Stereo Jack
	Communication	RS232 RS485 Network	2×DIN 8 1×2 Pin Connector 1×100Mbps (10/100BASE-TX)
	Power		1×HEC3800 DC Socket
Performance	Camera	Optical Zoom View Angle AV Digital Zoom Minimum Illumination DNR White Balance Focus Aperture/Electronic Shutter BLC WDR Video Adjustment SNR Effective Pixels	20X f=5.5~110mm 3.3°~54.7° F1.6 ~ F3.5 10X 0.5Lux (F1.8 ,AGC ON) 2D & 3D DNR Auto/Manual/One Push/3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K Auto/Manual Auto/Manual ON/OFF OFF/Dynamic Level Adjustment Brightness/Color/Saturation/Contrast/Sharpness/B/W mode/Gamma curve >55dB 2.07m,16:9
	Pan-and-Tilt Parameter	Pan/Tilt Movement Pan/Tilt Control Speed Preset Speed/Quantity	-170°~+170°/-30°~+90° 0.1~60°/S ; 0.1~30°/S Pan:60°/S, Tilt:30°/S; Up to 255 preset positions (10 remote control)
	Audio Compression Format	AAC,MP3,G.711A	
	Video Compression Format	H.264, H.265,Dual Streaming Output	
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60	
	Control Protocol	VISCA Pelco-D Pelco-P	
	Baud Rate(bps)	115200 9600 4800 2400bps	
	Network Protocol	RTSP RTMP ONVIF GB/T28181 VISCA	
	Supported Standards	HDMI 1.3 SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	
	Input Voltage	DC12V/1.5A	
	Max Power	12W	
	Temperature	-10℃~50℃	
	Humidity	20%~80%	
	Weight	Net 1.4kg	
	Dimension	Net 150mm×150mm×167.5mm	

Order Codes

Product Code	Item
981-0011-11-0	RGB20X-POE-WH 20X PTZ Camera(Support PoE)

Dimension

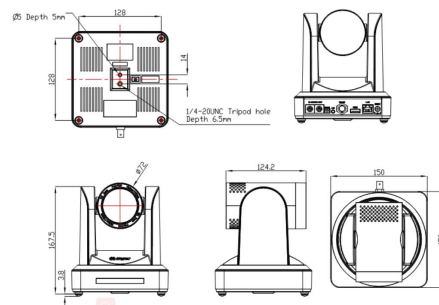

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

