

RGB30X-PNDI-WH 30X NDI Camera



NDI®

Key Features

- High speed optical zoom
- High performance in low light scenarios with Wide Dynamic Range
- Full 1920×1080p HD Resolutions up to 60 frames per second
- 2D & 3D low noise CMOS sensor
- PTZ control via serial, IP or NDI
- H.264, H.265 & MJPEG Streaming
- Stream simultaneously to up to three protocols
- Support PoE(IEEE 802.3af 48V)


Specification

Connectors	Video(Output)	HDMI	1×HDMI-A
		SDI	1×BNC
		NDI	1×RJ45
		LAN(support PoE)	1×RJ45
	Audio	Input	1×3.5mm Stereo Jack
Performance	Camera	RS232(In/Out)	2×DIN 8
		RS485	1×2 Pin Terminal Connector
		Network	1×100Mbps(10/100BASE-TX)
		Power	1×HEC3800 DC Socket
		Optical Zoom	30X f=4.3~129mm
		View Angle	2.34°~65.1°
		AV	F1.6 ~ F4.7
		Minimum Illumination	0.5lux (F1.8, AGC ON)
		DNR	2D & 3D DNR
		White Balance	Auto / Manual/ One Push/ 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K
		Focus	Auto/Manual
		Aperture/Electronic Shutter	Auto/Manual
		BLC	ON/OFF
		WDR	OFF/ Dynamic level adjustment
		Video Adjustment	Brightness,Color,Saturation,Contrast,Sharpness,B/W mode,Gamma curve
		SNR	>55dB
		Effective Pixels	2.07m,16:9
	Pan-and-Tilt Parameter	Pan/Tilt Movement	-170°~+170°/-30°~+90°
		Pan/Tilt Control Speed	0.1~60°/S, 0.1~30°/S
		Preset Speed/Quantity	Pan:60°/S,Tilt:30°/S;Up to 255 preset positions(10 remote control)
	Audio Compression Format	AAC,MP3,G.711A	
	Video Compression Format	H.264, H.265,Dual Streaming Output	
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60	
	Control Protocol	VISCA Pelco-D Pelco-P	
	Baud Rate (bps)	115200 9600 4800 2400bps	
	Network Protocol	NDI RTSP RTMP ONVIF GB/T28181	
	Supported Standards	HDMI	1.3
		SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI
		NDI	NDI HX low bandwidth version
Power	Input Voltage	DC12V/1.5A	
	Max Power	12W	
Environment	Temperature	-10℃~50℃	
	Humidity	20%~80%	
Physical	Weight	Net	1.4kg
	Dimension	Net	150mm×150mm×167.5mm

Order Codes

Product Code	Item
981-0011-16-0	RGB30X-NDI-WH 30X NDI Camera

Dimension

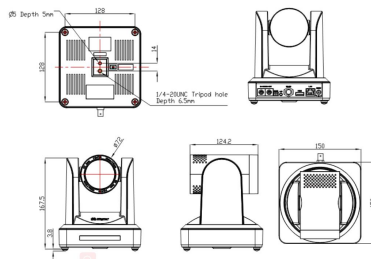

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgblink.com

