




Key Features



- Picture-in-Picture (PIP)
- Transition effects
- RGBlink instant TAKE with pre-Sync
- Audio controls
- Support for additional input options
- EDID management on board
- On board test patterns
- Support for multi-device cascade
- Two empty slots reserved for universal sender cards and RGBlink Subito™ Quatro sender module to install
- Support for XPOSE 2.0 control
- Support for RGBlink OpenAPI

Application

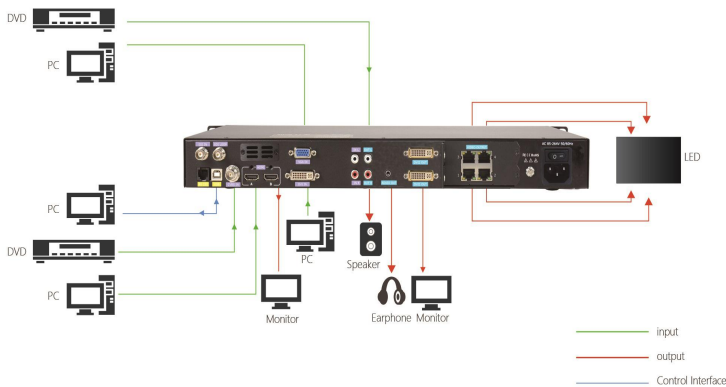

GX4 with Subito Quatro Module

Dimensions

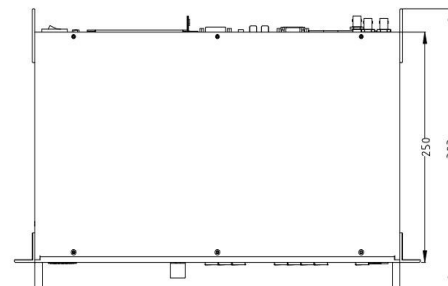

Order Codes

Product Code	Item
820-1004-02-0	GX4
190-0004-01-0	Single USB Input Module
190-0004-02-0	Single DVI Input Module
190-0004-03-0	Single HDMI Input/Loop Module
190-0004-04-0	Single 3G SDI Input/Loop Module
190-0004-05-0	Single HDBaseT Input Module
190-0004-06-0	Input EXT Interface
790-1001-28-0	Subito Quatro Sender Module
880-0033-01-0	SubitoNX Quatro Sender Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Connectors	Input	<i>Standard with</i> HDMI In/Loop 2×HDMI-A DVI 1×DVI-I VGA 1×DB15 CVBS 1×BNC SDI In/Loop 2×BNC <i>1 Slot up to 1 input</i> <i>Select from</i> DVI Module 1×DVI-I (DVI,VGA, YPbPr,CVBS) HDMI Module 1×HDMI-A HDMI Module 2×HDMI-A (1 In 1 Loop) 3G SDI Module 2×BNC (1 In 1 Loop) USB Module 2×USB-A (1 In 1 Backup) HDBaseT Module 1×RJ45	
	Audio	IN L/R 2×RCA OUT L/R 2×RCA Audio Out 1×3.5mm Stereo Jack	
	Output	DVI 2×DVI-I <i>2 slots up to 4 Gigabit ethernet ports</i> <i>Standard with</i> Subito Quatro Module 4×RJ45 <i>Select from</i> SubitoNX Quatro Module 4×RJ45 Sender Module of mainstream manufacturer	
	Communication	Serial RS232 In 1×RJ11 Serial USB In 1×USB-B	
	Power	1×IEC	
Performance	Input Resolutions	DVI HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 VGA VESA 800×600@60 1024×768@60 1280×1024@60 1366×768@60 1440×900@60 1600×1200@60 1920×1080@60 SDI SMPTE 480i 576i 720p@25/30/50/60Hz 1080i@50/59.94/60Hz 1080p@23.98/24/25/29.97/30/50/59.94/60Hz	
	Output Resolutions	<i>Select from below or configure customized</i> DVI SMPTE 720p@30/50/60 1080p@30/50/60 VESA 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 2048×1152@60 2560×816@60	
	Subito™ Quatro	RJ45 Digital Output Port (each port) Capacity 655,360 pixels Horizontal Range 3840 pixels Vertical Range 2048 pixels	
	Supported Standard	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI VGA UXGA HDMI 1.3	
Power	Input Voltage	AC 100V-240V, 50/60Hz	
	Max Power	25W	
Environment	Temperature	0℃~55℃	
	Humidity	20%~90%	
Physical	Weight	Net (Device)	3.1kg
		Packaged	5.25kg
Dimension	Net (Device)	480mm×303mm×45mm	
	Packaged	540mm×360mm×135mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,xiamen,Fujian,P.R.C.

RGBlink®



Specifications are correct at time of printing and subject to change or alteration without notice.

www.rgblink.com