

HDR

Signals with High Dynamic Range are supported for processing via the processor with high bandwidth and wide gamut 12bit grey level processing.



Visual Enhancements

Apply a range of visual effects and enhancements with fine grain controls.



Chroma



Brightness



Invert



Contrast



Hue



Sharpen



Gamma



Color Temperature



Noise Reduction

Scale

Scale output(s) to any size within the selected resolution range.



Format

D4 accepts all common 2K & 4K input formats, with EDID management built in. Output to any 2K or 4K format with custom resolutions able to be specified to down stream requirements.

Rotation & Flip

Support image rotation and flip including horizontal and vertical flip/mirror.




Crop & Position

Select X and Y offsets along with width and height to select any image part for output.



Output Splicing

Split output across the dual output channels providing an 8K x 2K display canvas and seamless pixel to pixel hard edge blend.

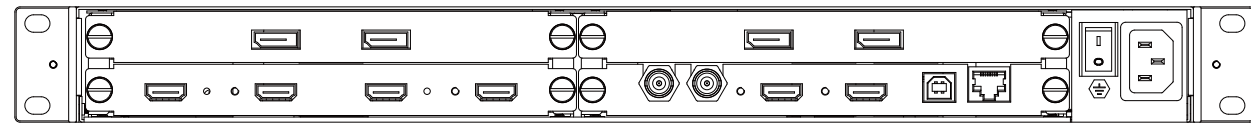

Specifications

Connections	Input	2 slots up to 4 inputs		
		Select from	4K HDMI Module	4 x HDMI-A (2 In/2 Loop)
	Output	Standard with Select from	DP 1.2 Module	2 x DisplayPort
			3G SDI Module	4 x BNC (2 In/2 Loop)
Performance	Communication	Select from	12G SDI Module	4 x BNC (2 In/2 Loop)
			HDMI 2.0	2 x HDMI-A
	Control	Select from	DP 1.2 Module	2 x DisplayPort
			12G SDI Module	2 x BNC
Features	Power	Select from	DVI Module	4 x DVI
			Genlock	2 x BNC
	Input Resolution	Select from	LAN	1 x RJ45
			Serial USB In	1 x USB Type B
Physical	Supported Standards	Select from below or configure customized	Serial Port	1 x USB-A
			LAN	1 x RJ45
	Splicing	Select from below or configure customized	1 x IEC	
Order Codes	DP 1.2	Select from below or configure customized		
	HDMI 2.0	Select from below or configure customized		
Dimensions	SMPT	Select from below or configure customized		
	VESA	Select from below or configure customized		
Product Code	Item	Select from below or configure customized		
	Dual DP 1.2 Input Module	Select from below or configure customized		
Item	Dual HDMI 2.0 Input Module	Select from below or configure customized		
	Dual 3G SDI Input Module	Select from below or configure customized		
Item	Dual 12G SDI Input Module	Select from below or configure customized		
	Dual DP 1.2 Output Module	Select from below or configure customized		
Item	Dual 12G SDI Output Module	Select from below or configure customized		
	Quad DVI Output Module	Select from below or configure customized		
Item	AC 90-264VAC, 50/60Hz	Select from below or configure customized		
	100W	Select from below or configure customized		
Item	0°C ~ 40°C	Select from below or configure customized		
	10%~85%	Select from below or configure customized		
Item	Net 7.2kg	Select from below or configure customized		
	Package 8.5kg	Select from below or configure customized		
Item	Net 480mm x 474mm x 45 mm	Select from below or configure customized		
	Package 535mm x 530mm x 130mm	Select from below or configure customized		

Order Codes


Product Code	Item
120-0004-01-0	D4
191-0004-01-0	Dual DP 1.2 Input Module
191-0004-02-0	Dual HDMI 2.0 Input Module
191-0004-03-0	Dual 3G SDI Input Module
191-0004-04-0	Dual 12G SDI Input Module
191-0004-21-0	Dual DP 1.2 Output Module
191-0004-22-0	Dual 12G SDI Output Module
191-0004-23-0	Quad DVI Output Module

HDMI HDCP

WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197

Proudly designed and manufactured in Xiamen Hi Technology Zone, China

Dimensions

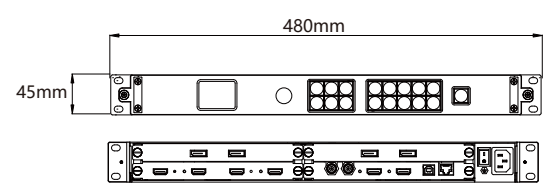

RGBlink®

www.rgblink.com

D4

4K HDR Scaler & Switcher



RGBlink®

D4

The standard in multi-format 4K presentation switching

D4 is a very flexible video switching and scaling solution for 4K signals featuring multiple output modes, a comprehensive on board feature set and acclaimed RGBlink modular design.

Truly multi-signal, D4 may be fitted with a wide range of input signals including HDMI 2.0m DisplayPort 1.2 and 12G-SDI along with conventional 2K signals.

In the tradition of previous generation 2K solutions signals can be converted, scaled, transcoded to 4K output. Dual channel 4K HDMI 2.0 output are standard while these two channels may be duplicated for output via the option slot .


There is full 4:4:4 colour space,12 bit on board processing and support for HDR signals to meet the highest performance standards.

EDID management is built in and D4 is also HDCP 2.X compliant.

Across a range of applications requiring scan conversion, scaling or seamless presentation switching, D4 is ideal for high performance and broadcast workloads.

Standard Mode


Both output channels are duplicated offering the same output as program and monitor. PIP's are available in this mode with PiP/layer count dependent on output resolution and layer arrangement.

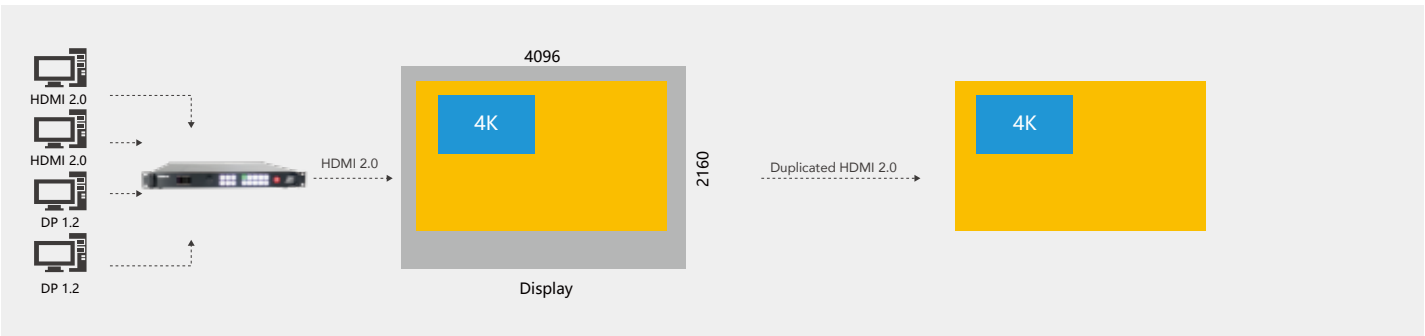

Example: 4K input scaled across a 4K output with 4K PIP source overlaid

Presentation Mode


Up to three 4K inputs may be used as PIPs over a 4K background video source.

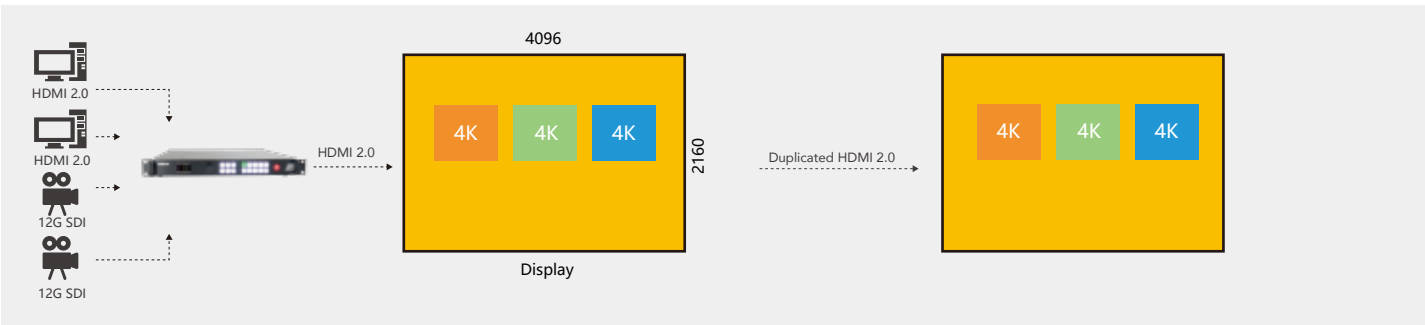

Example: Three 4K source as PIP, 1 4K source as background

Independent (Dual 4K) Mode


Each of output channels separately configured for image, resolution, scale and other attributes.

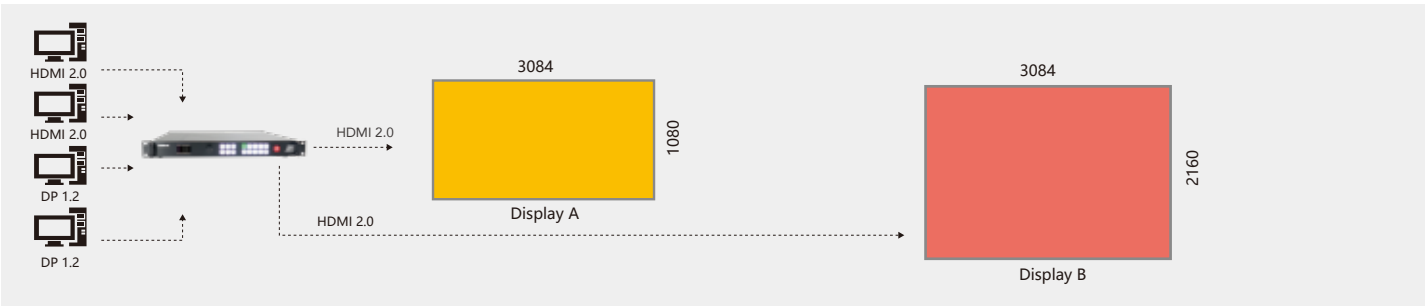


Example: Two separate inputs to two separate outputs, each at different resolution

Splicing Mode

Output channels are utilised to stitch or splice input source(s) to create large seamless fully synchronised display surfaces.

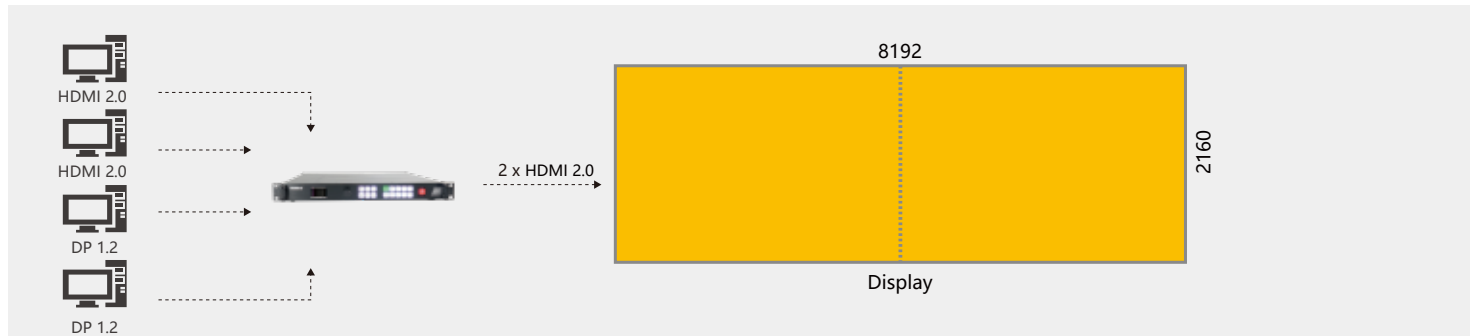


Example: 4K input scaled across 8K x 2K display area using two outputs, forming panoramic or wide screen display

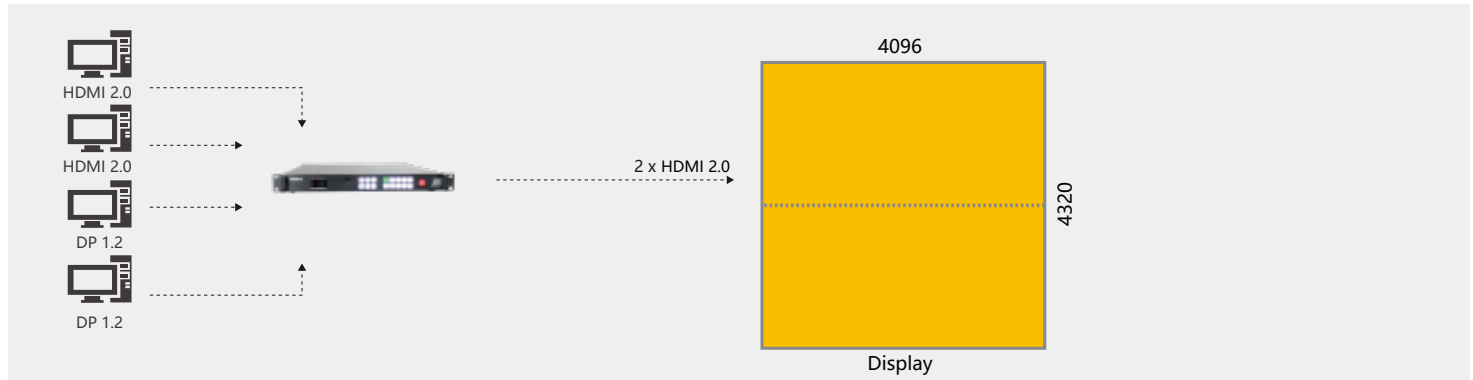

Example: 4K input scaled across 4K x 4K display area using two outputs, forming a seamless portrait display of

Switcher (Preview) Mode

Both outputs are set to the same resolution, whether 2K or 4K, with one channel serving as program (PGM), and the other channel as preset preview (PST) for full seamless alpha switching between preset and programme. All adjustment made on PST prior to switching to live PGM display output.

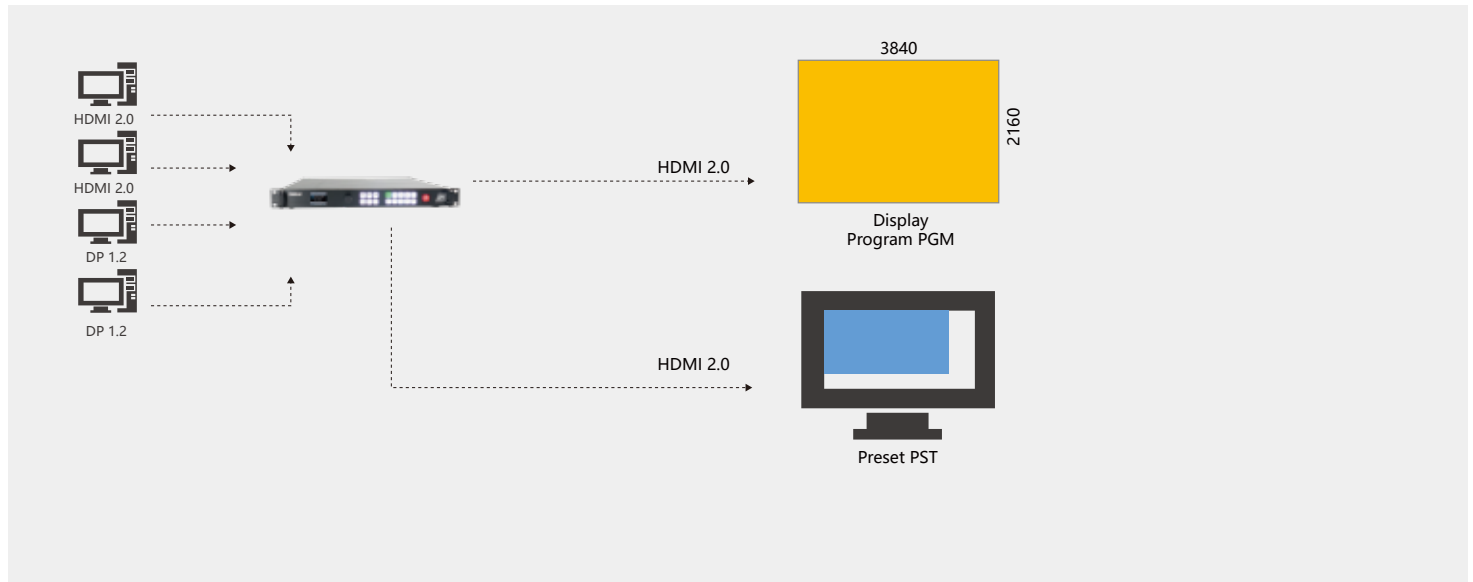

Example: One HDMI source on PGM output with a second HDMI source scaled and configured via output as PST

*shown with optional input and output modules – refer specification and options. 90deg rotation not available at launch

