



**LEGENDARY**



**RGBlink®**

# X<sup>8</sup> | Redefining 8K Video Processing



Industry leading X series video processing platform takes a massive step into the 8K future with X8. Designed and built for demanding high performance where 4K is the norm, X8 provides unparalleled multi-signal compositing, sync and switching with low latency while maintaining and enhancing visual fidelity.

## · Up to 48 4K Layers

Take advantage of powerful multiple 4K layers – output up to 48 scaled layers/windows on a fully configured system across 12 4K outputs, with up to eight 4K layers on any output port.

## · Seamless 4K & 8K Switching

Open, switch and transition video layers seamlessly with full sync even across multiple outputs. Transition between multi-signal, multi-scene presets, and PIP over background layers, bringing together 4K and spliced 8K sources on demand.

## · 8K Source Management

Splice 4K inputs and outputs for 8K operations fully in sync tear and glitch free, retaining the rich visual content even when scaled.

## · Full Color Space

Process high resolution video without compression or loss. X8 is 4:4:4 native with wide bandwidth in device to process high quality video without compromise. Up-sampling of 4:2:0 and 4:2:2 content to 4:4:4 is also supported

## · Seamless Synchronization

RGBlink technologies ensure high performance very low latency hardware-based video processing. Synchronisation and delivery of signals of any resolution across multiple outputs is tear-free and scaled pixel-to-pixel.

## · Build for Integration

Leverage RGBlink OpenAPI to connect from almost any platform, allowing integration capabilities that go way beyond simply triggering presets or scenes.

## · Powerful Display Systems Controls

Unlock unique and extensive device capabilities with the RGBlink XPOSE 2.0 control platform built right into X8 and accessible via a web browser. Create entire display systems comprised of not only multiple resolution displays but also displays of any format or type.


## · Native IP Streaming

Stream H.264 video sources via the LAN port providing live previews in browser connected XPOSE 2.0 configurations, presets and playlists.

## Live Virtual Control

RGBlink XPOSE 2.0 provides an industry, intuitive to use configuration and control platform for advanced RGBlink processors including X8.

Signals can be previewed live, multiple display system containers built, presets created and managed. Playback facilities include live and broadcast style as well as scheduled timeline-based options and more.

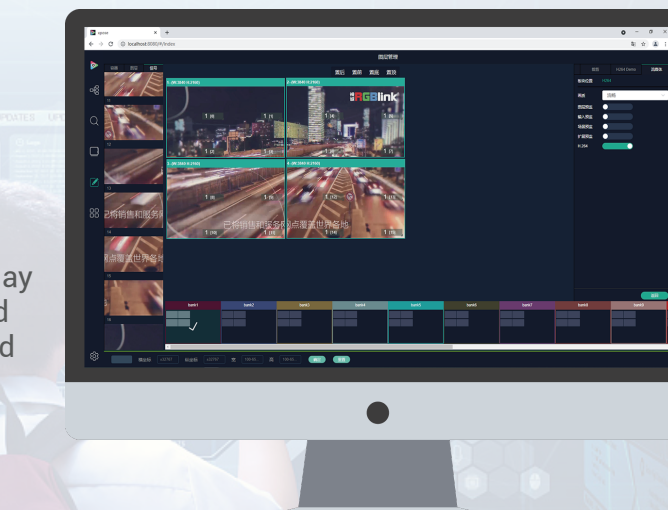

## · Lower TCO

Fit modules and components to the X8 system without unneeded overhead or bloat. Hot swap and exchange input and output modules without powering down the overall system. The modular design enables higher up times, ease of maintenance, and operational efficiencies.

## · World Leading Development

RGBlink designs, develops and manufactures in house, with unique capabilities and draws from the extensive RGBlink IP pipeline and experience in creating the advanced capabilities in the X8 processing platform.





## · High Performance Backplane

Maintaining full 4K60 4:4:4 for all signals, the X8 backplane and cross-point offers extreme bandwidth to ensure pixel perfect delivery at every resolution and format.

## · Genlock Sync

Synchronise and Genlock to other devices in a video system, with X8 accepting BlackBurst in.

## · Configurable Preview


The dedicated HDMI is configurable for up to 64 windows for the ultimate in local monitoring capability.

## · Extreme Resolutions

X8 supports 8K multi-cable ultra-high resolution sources in conventional and panoramic configurations, as well as standard 4K and 2K signal formats. For display, configure ultra large displays across multiple 4K outputs using multiple video layers

## · Seamless Video Switching

All switching is seamless with no black frames and is glitch/tear free across multiple outputs. Switch between presets with fades and cuts, as well as using transition effects.

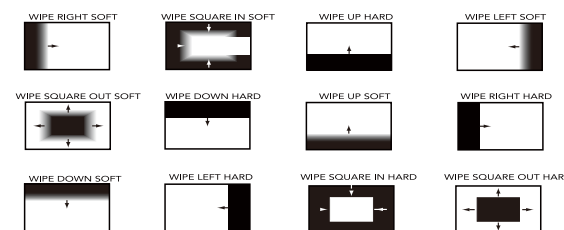

## · Audio Support

Select embedded audio from any source for re-embedded to any display output.

## · Low Latency Cross Conversion

With the best up-down processing engine in the industry, RGBlink offers the widest signal support capabilities and supports unique custom configured resolutions allowing even more video to be controlled, synchronised and delivered to any display.


## Quality without Compromise

Maintain the highest fidelity of source signals without compression or loss with 4:4:4 YUV/RGB colour space.

Manage video chroma sub-sampling and up-sampling of 4:2:0 and 4:2:2 sources for maximum flexibility.



RGBlink X8

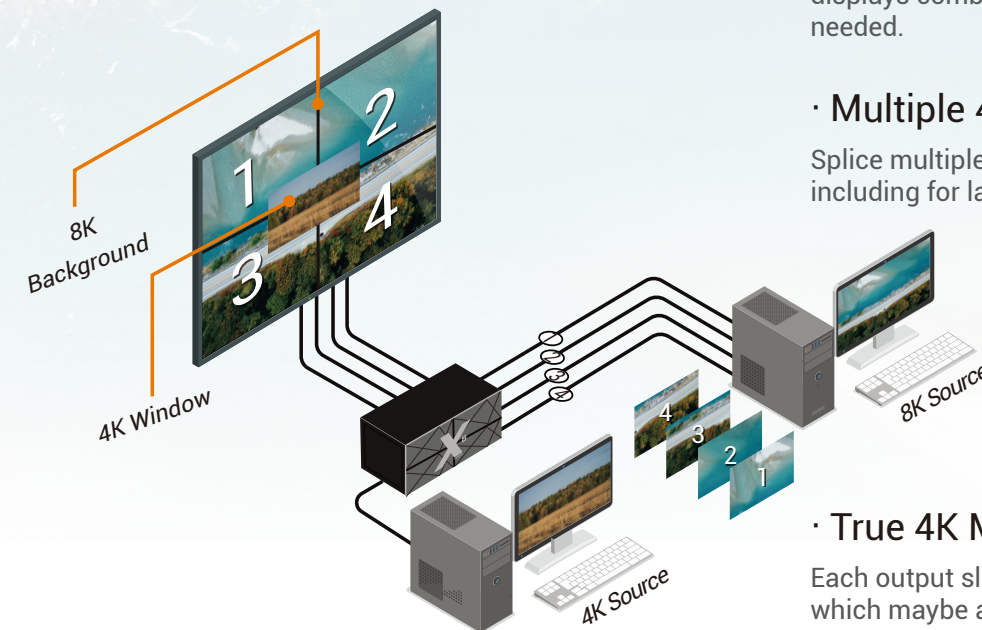

## · 8K Workflow Support


Manage multiple 8K sources and output displays combining with other content as needed.

## · Multiple 4K Canvas


Splice multiple 4K inputs in any configuration including for landscape or panoramic arrangements.

## · True 4K Multi-Layer Windowing

Each output slot in X8 supports eight 4K60 layers which maybe assigned freely across outputs, including as eight 4K layers on single 4K output.

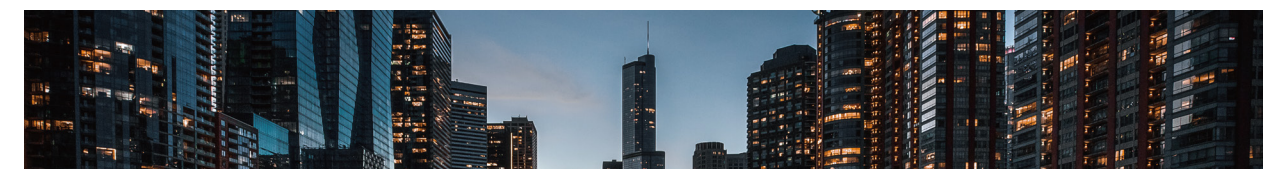

Ultra wide canvas

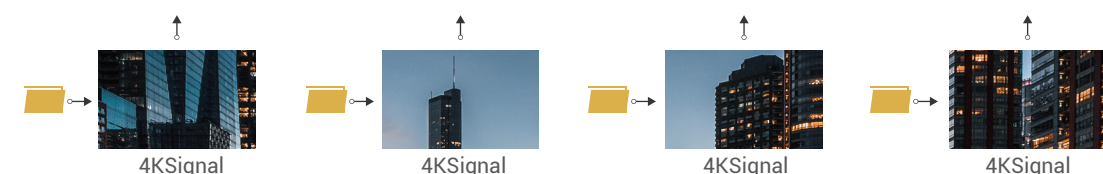





## Flexible Canvas Assignment

The ultimate in flexibility, create layouts in pixel space canvas, mapping sources as layers across positioned displays.

Save and recall layouts and presets on demand for visually engaging experiences powered at the edge with RGBlink X8.






## Specification

<b>Connctetors</b>	Input	6 input slots,up to 24 inputs Select from 4K HDMI Module DP 1.2 Module 12G SDI Module 8K Module(Preliminary)	4×HDMI-A 4×DisplayPort 4×BNC 1×HDMI-A + 1×DisplayPort
	Output	6 output slots,up to 12 outputs Select from 4K HDMI Module DP 1.2 Module	2×HDMI-A 2×DisplayPort
<b>PVW</b>	PVW	1×HDMI-A	
	Communication	USB 3.0 CTL HDMI RS 232 LAN Genlock/Sync	1×USB-A 1×HDMI-A 1×RJ11 1×RJ45 2×BNC (1 In   1 Loop)
<b>Control</b>	LAN	1×RJ45	
	Serial Port	1×RS232	
<b>Power</b>	Power	2 slots,up to 2 power inputs	2×IEC(standard configuration comes with 1, another is optional)
<b>Performance</b>	Input Resolutions	Select from below or configure customized	
		HDMI	
		SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   2160p@23.98/24/25/50/59.94/60
		VESA	1024×768@60/75/85   1280×768@50/60   1280×800@50/60   1280×1024@60   1360×768@60   1400×900@60   1400×1050@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×812@60   2560×816@60   2560×1600@60   3840×1080@60   3840×2160@50/60   4096×2160@60   7680×1080@60   7680×4320@60   User Customized Resolution
	12G SDI	SMPTE	720p@50/60   1080p@50/60   2160p@50/60
		DP	
		SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   2160p@23.98/24/25/50
		VESA	1024×768@60/75/85   1280×768@50/60   1280×800@50/60   1280×1024@60   1360×768@60   1400×900@60   1400×1050@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×812@60   2560×816@60   2560×1600@60   3840×1080@60   3840×2160@50   4096×2160@60   7680×1080@60   7680×4320@60   User Customized Resolution
	Output Resolutions	Select from below or configure customized	
		HDMI 2.0	
		SMPTE	1080p@25/29.97/30/50/59.94/60   2160p@25/29.97/30/50/59.94/60
		VESA	640×480@60   800×600@75   1280×768@50/60   1280×800@50/60   1280×1024@60   1360×768@60   1600×1200@60   1920×1080@60   2048×1152@60   2560×812@60   2560×816@60   2560×1600@60   3840×1080@30/60   3840×2160@30/50/60   4096×2160@60   7680×1080@60   User Customized Resolution
	DP1.2	SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60   1080p@23.98/24/25/29.97/30/50/59.94/60   2160p@23.98/24/25/50
		VESA	1024×768@60/75/85   1280×768@50/60   1280×800@50/60   1280×1024@60   1360×768@60   1400×900@60   1400×1050@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×812@60   2560×816@60   2560×1600@60   3840×1080@60   3840×2160@50   4096×2160@60   7680×1080@60   User Customized Resolution
		Bandwidth	18Gbps
		Grey level	3840x2160@50 10bit HLG   3840x2160@30 10bit HDR (for HDMI 2.0 output)
		Color Space	RGB/YUV444   YUV422
		HDCP	2.2
<b>Power</b>	Input Voltage	AC 100V-240V, 50/60Hz	
	Max Power	1200W	
<b>Environment</b>	Temperature	0°C ~ 50°C	
	Humidity	10%~90%	
<b>Physical</b>	Weight	37.9kg(Net)   44kg (Package)	
	Dimension	522mm×484mm×355.6mm(Net)   610mm×720mm×700mm(Package)	

## Order Codes

Product Code	Item
310-0008-01-0	X8

## Dimension

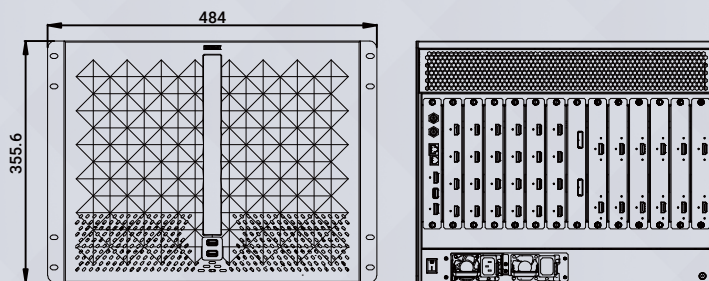

Unit:mm

**HDMI® HDCP™**

Proudly designed and manufactured in Xiamen Hi Technology Zone, China  
WEB: [www.rgblink.com](http://www.rgblink.com) EMAIL: [sales@rgblink.com](mailto:sales@rgblink.com) PHONE: +86 592 5771197

**RGBlink®**



[www.rgblink.com](http://www.rgblink.com)