

TAO 1pro-S




Key Features

- NDI encoder and decoder
- 5.5 inch HD touch screen for operation
- Asynchronous rotation of main screen and HDMI output
- 2*UVC inputs,1*HDMI 1.3 input,1*SDI input and 1*HDMI 2.0 output
- Sound column
- Type-C interface for charging, support PD protocol
- Compatible with SONY NF970 and Panasonic AG-VBR59MC standard battery socket (no battery install for standard version)

Application



Dimension

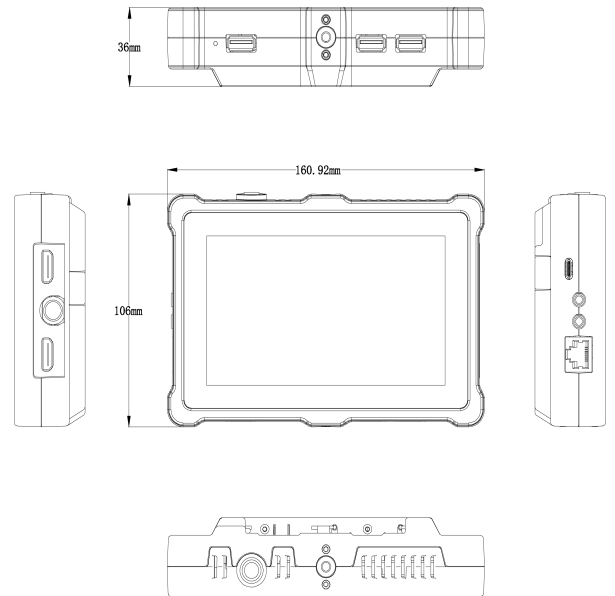

Order Codes

Product Code	Item
410-5513-01-1	TAO 1pro-S
490-5513-01-0	TAO 1pro lithium battery(optional)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	HDMI 1.3	1×HDMI-A	
		SDI	1xBNC	
		USB 3.0	2×USB-A	
	Output	HDMI 2.0	1×HDMI-A	
	Record	USB 2.0	1×USB-A	
	Audio	In	1×3.5mm Audio Jack	
		Out	1×3.5mm Audio Jack	
Communication	LAN	1×RJ45		
Power		1×USB-C		
Performance	Input Resolutions	HDMI		
		SMPTE	720p@50/60 1080p@23/24/60	
		VESA	1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1600×1200@60 1680×1050@60 1920×1080@60	
	Output Resolutions	HDMI		
SMPTE		720p@50/60 1080p@24/25/50/60 2160p@60		
VESA		1024×768@60 1280×720@50/60 1280×800@60 1280×1024@60 1360×768@60 1920×1080@50/60 3840×2160@60		
Supported Standard	HDMI	1.3(Input) 2.0(Output)		
	USB	3.0		
Screen Feature	Screen Dimension	5.5" TFT		
	Resolution	1080×1920 pixels		
	Dot Pitch	0.063(H)×0.021(W)(mm)		
	Aspect Ratio	16:9		
	Brightness	450cd/m ²		
	Contrast	1000:1		
	Backlight	LED		
	View Angle	80°/80°(L/R)80°/80°(U/D)		
Power	Input Voltage	9V/2A		
	Max Power	18W		
Environment	Temperature	0°C~55°C		
	Humidity	5%~85%		
Physical	Weight	Net	350g(without battery);882g(with battery)	
		Package	770g	
	Dimension	Net	161mm×106mm×36mm	
		Package	255mm×145mm×85mm	

*1. i signal input and output are not supported;

*2. Reboot is required for signal format modification;

*3. Delay of decoding and encoding is affected by the network.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
 Specifications are correct at time of printing and subject to change or alteration without notice.