




Key Feature

- 8K@60 input,HDCP 2.X
- Built-in 4" LCD touch screen for video preview
- 8K EDID management
- USB keyboard&mouse operation with embedded web server
- Genlock input and loop through
- XPOSE control, Web Server control (to be published)
- Hot swap
- Open API
- AOI splicing
- Multi-interface copy output, arbitrary zoom in and out
- HDR 10 & HLG compliance


Specification

Connectors	Input	2 slots, support 2 input Standard HDMI 2.1 1xHDMI-A Select from DP 1.4 (to be published) 1xDP TYPE-C (to be published) 1xUSB-C
	Output	Standard HDMI 2.0 4xHDMI-A
	Communication	Standard Genlock In/Loop 2xBNC LAN 1xRJ45 RS232 1xRJ11
	Control	Standard USB 1xUSB-A LAN 1xRJ45 Serial Port 1xRS232
	Power	1xDC Jack
Performance	Input Resolutions	Select from below or configure customized HDMI 2.1 SMPTE 720p@50/60 1080p@30/50/60 2160p@30/60 4320p@30/60 VESA 1024x768@60 1280x720@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1440x900@60 1920x1200@60 3840x570@60 2560x1600@60/120 3840x2160@30/60 3840x2400@60 4096x2160@60 7680x4320@60 DP 1.4 SMPTE 720p@50/60 1080p@30/50/60 2160p@30/60 4320p@30/60 VESA 1024x768@60 1280x720@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1440x900@60 1920x1200@60 3840x570@60 2560x1600@60/120 3840x2160@30/60 3840x2400@60 4096x2160@60 7680x4320@60 TYPE-C SMPTE 720p@25/30/50/60 1080p@30/50/60 2160p@30/60 VESA 1280x720@30/50/60 1280x768@60 1920x1080@25/30/50/60 3840x2160@30/60 7680x4320@30
	Output Resolution	Select from below or configure customized HDMI 2.0 SMPTE 720p@50/60 1080p@30/50/60 2160p@30/60 VESA 1024x768@60 1280x720@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1440x900@60 1920x1200@60 3840x570@60 2560x1600@60/120 3840x2160@30/60
	Supported Standard	HDMI 2.1 DP 1.4 USB 3.0
	Grey Level	12 bit for 8K30, 10 bit for 8K60
	Color Space	8K30 YUV 422, 8K60 YUV 420
	Power	Input Voltage AC 100V-240V, 50/60Hz Max Power 60W
Environment	Temperature 0°C ~ 70°C Humidity 15% ~ 85%	
Physical	Device Weight 7.2kg Packaged Weight 8.5kg Device Dimension 484mmx378mmx88.9mm Packaged Dimension 530mmx530mmx130mm	

Application

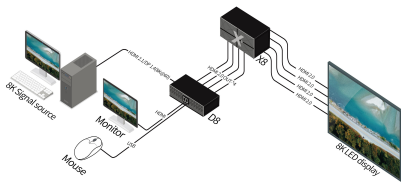

Dimension

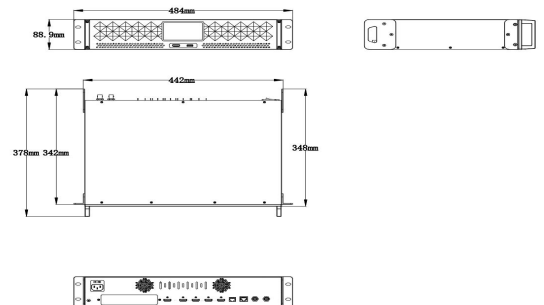

Order Codes

Product Code	Item
130-0008-01-0	D8

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
 Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbink.com

