

Q4L




Key Features

- Modular design with flexible input & output combinations
- Custom output resolutions
- Support up to 8 layers
- Independent display management control
- Custom EDID
- Control via XPOSE 2.0 or RGBlink OpenAPI

Application



Dimensions

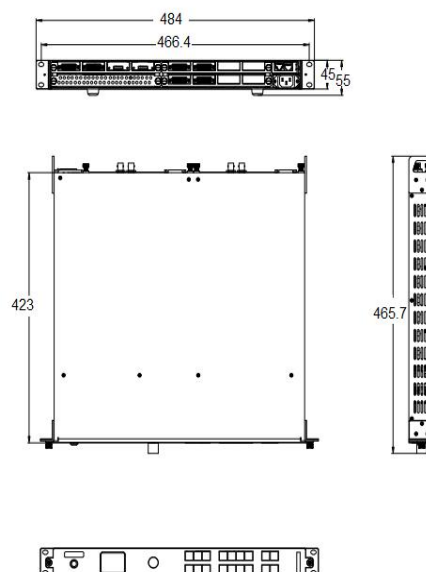

Order Codes

Product Code	Item
712-0004-01-0	Q4L
190-0001-07-2	Single 3G SDI Input/Loop Module
190-0001-15-2	Single HDBaseT Input Module
190-0001-10-2	Single USB2.0 Input/Backup Module
790-0004-02-0	4K@60 Input Module

Product Code	Item
790-0004-01-0	Single HDMI (Sync) Input/Loop Module
190-0001-06-4	HDMI Input Module
190-0001-04-2	DVI Input Module
980-0004-01-0	EXT 4F-IM Matrix Input Interface
790-0004-21-0	Single DVI (Sync) Output Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®
www.rgbink.com



Specification

Connectors	Input	2 slots, up to 8 inputs	
		Standard with	HDMI 1.3 Module 2×HDMI-A(1 In/1 Loop) DVI Module 2×DVI-I
		Optional, select from	Dual DVI HDMI 1.4 HDMI 2.0 DP 1.2 1×DVI-I 2×HDMI-A 1×DP 3G SDI Module 1×BNC (1 In/1 Loop) HDBaseT Module 1×RJ45 USB Module 1×USB-A (1 In/1 Backup) HDMI1.3 Module 1×HDMI-A (1 In/1 Loop) DVI Module 1×DVI-I
	Output	Standard with	DVI Module 4×DVI-I (DVI only)
	Communication	LAN	1×RJ45
		RS 232	1×RJ11
	Power		1×IEC
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@50/59.94/60 DVI HDBaseT SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60 1920×1200@60 2048×1152@60 DP VESA 800×600@60 1024×768@60 1280×1024@60 1440×900@60 1600×1200@60 1920×1080@60 2560×1440@60 3840×2160@60 HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@50/60 VESA 800×600@60 1024×768@60 1280×1024@60 1440×900@60 1600×1200@60 1920×1080@60 3840×2160@60 4096×2160@60	
	Output Resolutions	Select from below or configure customized DVI SMPTE 720p@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×720@50/59.94/60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60 2048×1152@60	
	Supported Standards	SDI 3G HDMI 2.0 DVI Dual Link DisplayPort 1.2 HDBaseT 1.0	
Power	Input Voltage	AC 85V-264V, 50/60Hz	
	Max Power	65W	
Environment	Temperature	0℃~45℃	
	Humidity	10%~85%	
Physical	Weight	Net	8.5kg
		Packaged	9.5kg
	Dimension	Net	484mm×466mm×45mm
		Packaged	635mm×545mm×135mm

