

D8




Key Feature

- 8K@60 input, HDCP 2.X
- Built-in 4" LCD touch screen
- 8K EDID management, supporting communicating custom resolution to source computer
- Genlock input and loop through
- XPOSE control, Web Server control (to be published)
- Hot swap
- Open API
- 8K@30 AOI splicing
- Multi-interface copy output, arbitrary zoom in and out
- HDR 10 & HLG compliance


Specification

Connectors	Input	Standard	HDMI 2.1	1×HDMI-A
	Output	Standard	HDMI 2.0	4×HDMI-A
	Communication	Standard	Genlock In/Loop	2×BNC
			LAN	1×RJ45
			RS232	1×RJ11
Control	Standard	LAN	1×RJ45	
		Serial Port	1×RS232	
Power			1×DC Jack	
Performance	Input Resolutions	Select from below or configure customized		
		HDMI 2.1		
		SMPTE	720p@50/60 1080p@30/50/60 2160p@30/60 4320p@30/60	
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1440×900@60 1920×1200@60 2560×1600@60/120 3840×2160@30/60 3840×2400@60 4096×2160@60 7680×4320@60	
	Output Resolution	Select from below or configure customized		
		HDMI 2.0		
	SMPTE	720p@50/60 1080p@30/50/60 2160p@30/60		
	VESA	1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1440×900@60 1920×1200@60 2560×1600@60/120 3840×2160@30/60		
Supported Standard	HDMI 2.1			
Grey Level	12 bit for 8K30, 10 bit for 8K60			
Color Space	8K30 YUV 422, 8K60 YUV 420			
Power	Input Voltage	AC 100V-240V, 50/60Hz		
	Max Power	60W		
Working Environment	Temperature	0°C ~ 70°C		
	Humidity	15% ~ 85%		
Physical	Device Weight	7.2kg		
	Packaged Weight	8.5kg		
	Device Dimension	484mm×378mm×88.9mm		
	Packaged Dimension	530mm×530mm×130mm		

Application

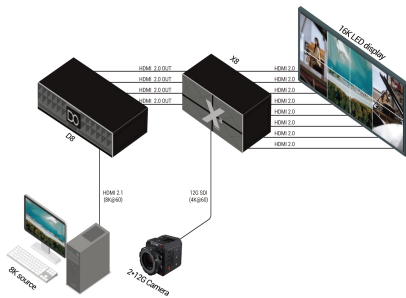

Dimension

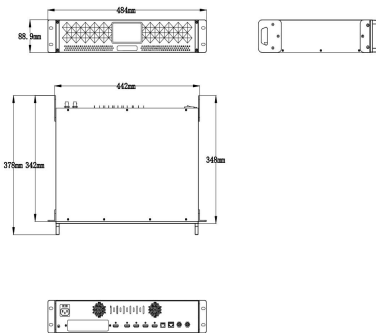

Order Codes

Product Code	Item
130-0008-01-0	D8

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
 Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
 Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
 www.rgbink.com

