

TAO 1pro




Key Features

- 5.5 inch HD touch screen for operation
- Network HD streaming
- Seamless switcher
- Asynchronous rotation of main screen and HDMI output
- 2*UVC inputs, 2*HDMI 1.3 input and 1* HDMI 2.0 output
- Bluetooth 5.0
- NDI 5.0 encoder
- NDI decoder
- Support image function: oscillograph, vectorgraph histogram, etc
- Sound column
- Recording via USB 2.0 port, mobile hard disk stores up to 2T
- Multistream up to 4 Live Streaming platform Simultaneously
- Compatible with SONY NF970 and Panasonic AG-VBR59MC standard battery socket (no battery install for standard version)

Application



Dimension

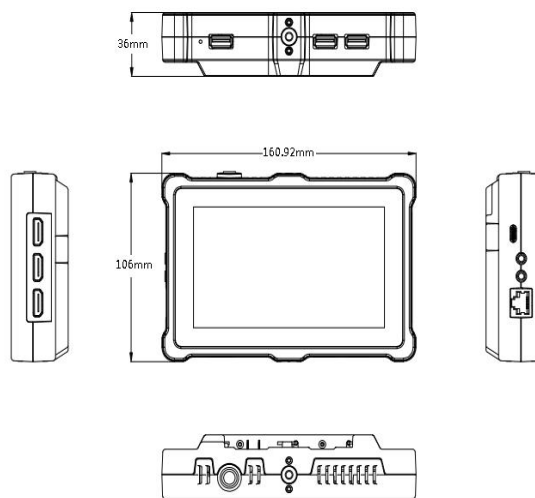

Order Codes

Product Code	Item
410-5513-01-0	TAO 1pro
410-5513-01-1	TAO 1pro-S
490-5513-01-0	TAO 1pro lithium battery(optional)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Connectors	Input	HDMI 1.3	2×HDMI-A
		USB 3.0	2×USB TypeA
	Output	HDMI 2.0	1×HDMI-A
	Record	USB 2.0	1×USB TypeA
	Audio	In	1×3.5mm Audio Jack
		Out	1×3.5mm Audio Jack
	Communication/Stream	LAN	1×RJ45
	Power		1×USB-C
Performance	Input Resolutions	HDMI	
		SMPTE	720p@50/60 1080p@23/24/60
		VESA	1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1600×1200@60 1680×1050@60 1920×1080@60
	Output Resolutions	HDMI	
		SMPTE	720p@50/60 1080p@24/25/50/60 2160p@60
		VESA	1024×768@60 1280×720@50/60 1280×800@60 1280×1024@60 1360×768@60 1920×1080@50/60 3840×2160@60
	Supported Standard	HDMI	1.3(Input) 2.0(Output)
		USB	3.0
Screen Feature	Screen Dimension	5.5 ''TFT	
	Resolution	1080×1920 pixels	
	Dot Pitch	0.063(H)×0.021(W)(mm)	
	Aspect Ratio	16:9	
	Brightness	450cd/m ²	
	Contrast	1000:1	
	Backlight	LED	
	View Angle	80°/80°(L/R)80°/80°(U/D)	
Power	Input Voltage	9V/2A	
	Max Power	18W	
Environment	Temperature	0℃~55℃	
	Humidity	5%~85%	
Physical	Weight	Net	0.35kg(without battery);882g(with battery)
		Package	0.77kg(1pcs) 19.6kg(20pcs)
	Dimension	Net	161mm×106mm×36mm
		Package	255mm×145mm×85mm(1pcs) 565mm×490mm×345mm(20pcs)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®

www.rgblink.com

