


Specifications

Connectors	Input	1 slot up to 4 single inputs		
		Standard with		
		NDI Module	2 × RJ45	
		select from		
		DVI Module	1 × DVI-I (supports DVI,VGA,YPbPr,CVBS)	
		HDMI Module	1 × HDMI-A	
		SDI Module	2 × BNC (1 In 1 Loop)	
	Output	USB Module	2 × USB (1 In 1 Backup)	
		NDI Module	1 × RJ45	
		1 slot,select from		
		With SDI	2 × HDMI-A 1 x BNC	
		Without SDI	2 × HDMI-A	
		With USB 3.0/SDI	2 × HDMI-A 1×BNC 1×USB-A	
		With USB 3.0 without SDI	2 × HDMI-A 1×USB-A	
Audio	IN L/R	2 × RCA		
	OUT L/R	2 × RCA		
	OUT	1 × 3.5mm Stero Jack		
Communication	LAN	1 × RJ45		
	Tally	1 × DB15		
	USB	1 × USB-B		
	Genlock Y	1 × BNC		
Power	1 × IEC			
Performance	Input Resolution	SDI		
		SMPTE	480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60	
		DVI HDMI		
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60	
		VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60	
	Output Resolution	Select from below or customized		
		SDI		
		SMPTE	480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60	
		HDMI		
		SMPTE	720p @50/59.94/60 1080p@50/59.94/60	
		VESA	1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60	
		USB 3.0 (follow HDMI)	1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60	
	Supported Standards	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	
		HDMI	1.3	
DVI		Single Link		
NDI decoding		NDI HX2		
USB		3.0		
Features	Layers	2		
	MASK Edit	Support		
	Brightness	Standard range		
	EDID Management	Yes		
Power	Input Voltage	AC 85V-264V, 50/60Hz		
	Max Power	120W		
Environment	Temperature	0– 55°C		
	Humidity	10%-90%		
Physical	Weight	Net weight	5.5Kg	
		Package	8kg	
	Dimensions	Net weight	480mm×280.5mm×231.1mm	
		Package	585mm×410mm×205mm	

Order Codes

Product Code	Item
220-0001-01-0	M1
220-0001-04-0	M1-NDI
290-0001-03-0	Output Module PGM HDMI/SDI/USB 3.0 PVW HDMI
290-0001-05-0	Output Module PGM HDMI/USB 3.0 PVW HDMI
190-0001-04-2	Single DVI Input Module
190-0001-07-2	Single 3G-SDI Input/Loop Module
290-0001-08-2	Single NDI Input Module
190-0001-10-2	Single USB2.0 Input/Backup Module
190-0001-13-2	Single HDMI Input Module
930-0002-01-0	Wings/Sidesfor M1 (Pair)
930-0002-02-0	Rack for M1

Dimensions

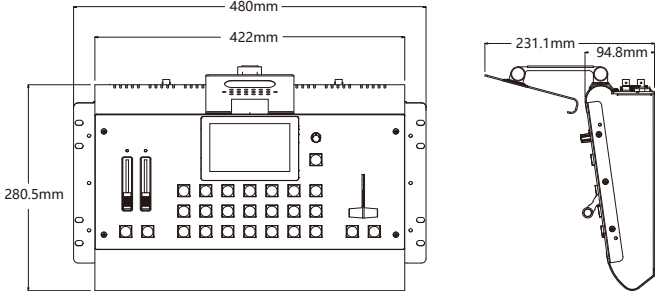

WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197
Proudly designed and manufactured in **Xiamen** Hi Technology Zone, China



www.rgblink.com



Mobile +
Mixed Signal Streaming from Anywhere to Everywhere



M1



Fully integrated video scaling and mixing for everyday

A complete solution, simply connect M1 to any display and start presenting. Front panel console style controls together touch screen display make M1 intuitive and natural in use, even for the new operator.

More than just a video mixer, M1 allows full scaled output to modern displays without to additional equipment. For stage/conference presentations on board features including PIP (picture-in-picture) add powerful capabilities to make use of additional video sources including cameras;


While compact in size, M1 brings together essential features for small presentation environments, including audio mix features allowing connection to audio mixers or powered speakers.

Features

- Module based design for wide range in/out request
- Module hot swapable
- Preview 4 inputs
- Seamlessswitching between PST and PGM
- Support NDI decoding
- Multiple audio outputs available
- Streaming via USB 3.0 output module and mobile phone
- 2 video layers plus additional layers for OSD, LOGO, STILL
- Mask for foreground layer including support for user defined mask
- Compatible with all kinds of Digital Displays
- Genlock Y In
- Multiple Presets and savable to the external USB disk
- 14 Transition Effects on the T-bar and TAKE button
- PTZ VISCA control compatible

NDI Decoding

M1 is equipped with NDI decoding module, which supports up to 4 Gigabit NDI network ports, which can realize high-quality, low-laten cy, long-distance transmission applications up to NDI | HX2.

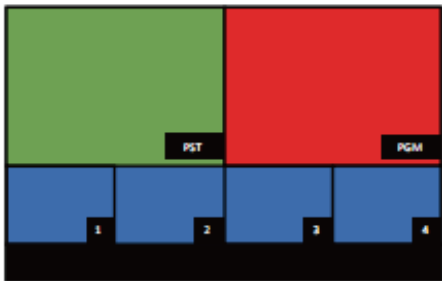


Dedicated Preview

A dedicated HDMI output with multi-view is provided from which both PGM and PST can be monitored, along with input sources and audio levels.




Mobile streaming integration

Android tablet or mobile holder can be installed to M1, and realize live streaming through TAO APP anytime, anywhere, without the need of a computer.

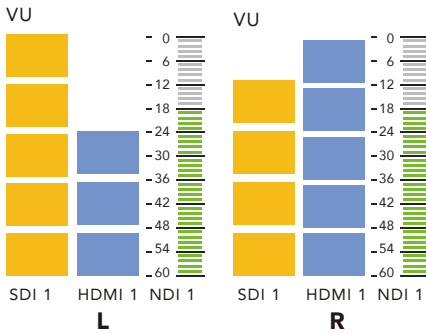

Mixed Audio

Both embedded and insert audio are supported with separate left/right audio level controls available on the front panel. Audio may be selected independently from the video source. PPM monitoring maybe shown on the PVW as visual confirmation of source and output.

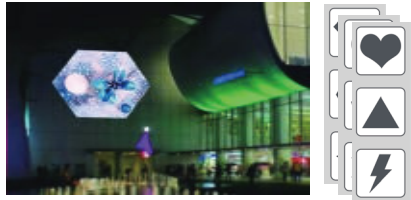

Digital Effects

The PIP may have an effect applied – options include masks (with a range built in as well as support for custom masks), DSK/Chroma Key to remove a background colour and variable edge blend, as soften effect to allowing the PIP to merged with the main image.



Transition Effects

There are over a dozen transition effects and wipes built into M1. These maybe used via the T-bar or timed from the TAKE button.



Visual Enhancements

Apply a range of visual effects and enhancements with fine grain controls may be utilised for each input. Controls include brightness, contrast, saturation, sharpness and color temperature.



Video Mixing

M1 vision mixer style control panel provides a range of tactile controls including familiar T-Bar and large illuminated buttons for easy of operation.

Modular by Design

Each input is individual and are user fit – choose from a wide range of modular signal options. Modules are highly standardised across the RGBlink range for event greater flexibility.

Input options include HDMI, DVI, SDI, CVBS, USB and NDI more.

Output options are HDMI or HDMI|SDI|USB 3.0 .



**shown with optional input and output modules,support structure for mibile devices are optional,need to order separately – refer specification and options.
Pad not included