
TAO 1mini-HN



Quick Start



Features:

- Light in weight and small in appearance, easy to carry
- NDI node for encode and decode
- Support multiple formats, including RTMP/RTMPS/RTSP/SRT/FULL NDI/NDI | HX3/NDI | HX2/NDI | HX
- Stream to at least 4 platforms at the same time
- Resolution up to 2K@60
- Low latency
- Intuitive touch control and dynamic display
- Power from USB-C or PoE network
- Dual 1/4in mounts

Content

Overview	2
About Your Product	3
Appearance	3
Connectors	4
Dimension	5
Use Your Product	6
Turn on Your TAO 1mini-HN	6
Input Area	7
Input Signal Selection	7
NDI Decoding	8
RTMP Pull	8
Play Video in U Disk	9
Output Area	10
RTMP Push	10
NDI Encoding	11
Settings	12
Go to Homepage	12
Input Settings	12
Output Settings	13
Network	14
Bluetooth	15
Fan Control	15
Display	16
About TAO 1mini-HN	16
ON AIR	17
Status Display Area	18
Contact Information	19



Overview

TAO 1mini-HN supports HDMI &UVC and FULL NDI® gigabit Ethernet video stream codecs for encoding and decoding.

TAO 1mini-HN features light in weight and small in appearance, which makes it easy to carry. Standard camera screw holes can be easily installed to the camera bracket. The device has a 2.1-inch TFT touch screen for real-time monitoring of signals and menu operations. Support U disk recording, support PoE and other functions.

System Connection

RGBlink offers solutions to demanding technical problem. Any application questions, or required further information, please contact with our customer Support Engineers.



TAO 1mini-HN SYSTEM CONNECTION DIAGRAM

About Your Product

Appearance



No.	Item	Description
1	Touch Screen	2.1-inch TFT touch screen for real-time monitoring of signals and menu operations.
2	¼in mounts	For installation.

Connectors



No.	Connectors	Description
1	USB-C	Connect to the power supply, support PD protocol.
2	HDMI-OUT	Connect to external monitor for real-time monitoring of inputs and outputs.
3	USB-C	For receiving video signal from your phone or others. Connect to USB camera for UVC capture. Support 5V/1A reverse power supply.
4	HDMI-IN	For receiving video signal.
5	3.5mm Audio Socket	For analog audio input and audio output monitoring.
6	USB 3.0	Connect to harddisk for recording, and storage up to 2T.
7	LAN	Gigabit network port, support PoE.

Dimension

Following is the dimension of TAO 1mini-HN for your reference: 91mm(diameter)×40.8mm(height)



Bottom View



Right View



Front View



Rear View


Use Your Product

Turn on Your TAO 1mini-HN

Connect your TAO 1mini-HN with the packaged USB-C power link cable and standard power adapter. Besides, TAO 1mini-HN also support power over Ethernet.



After TAO 1mini-HN is powered on, 2.1 inch screen will show TAO 1mini logo and then come into the main menu.

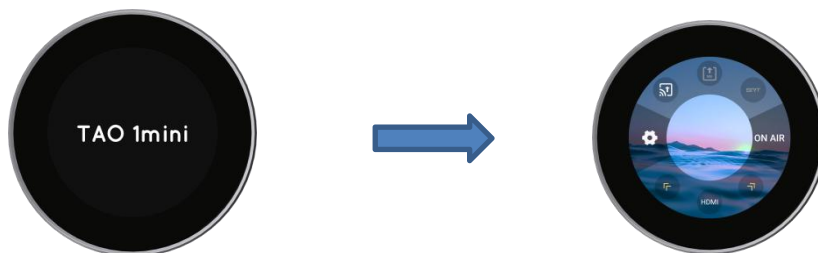

Notice:

1. Users can choose functions through slight touch and set parameters through long-pressing.
2. In **Settings**, users can choose different functions through clicking **Arrow Icon**.

Input Area




Users can operate five functions in Input Area, including HDMI Input Signal Selection, UVC Input Signal Selection, USB Player, RTMP Pull and NDI Decoding.

Input Signal Selection

Click yellow arrows to choose HDMI or UVC as input signal.



Long press the UVC icon to adjust Brightness and Mirror.

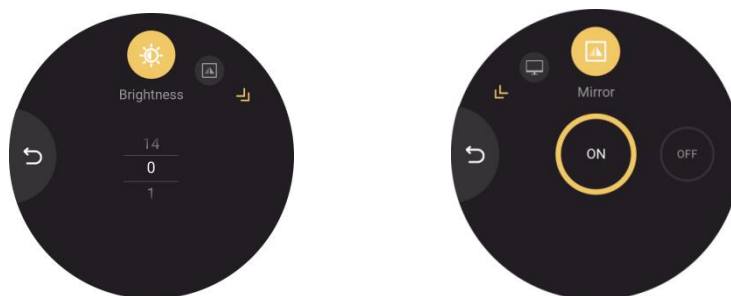

Brightness: 0-14


Mirror: ON/OFF

Notice: The above settings are designed for UVC input signal **ONLY**.

RGBlink[®]

NDI Decoding


Click yellow arrows to select NDI Decoding icon. Long press the icon to enter the following interface.

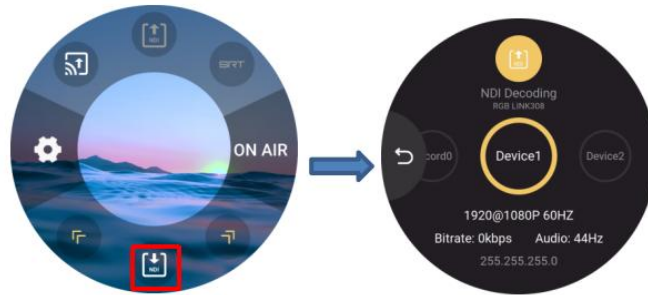


Select NDI source by swiping the screen. Users can see NDI channel name, NDI source you selected, IP address, bitrate and more.

RTMP Pull

Click yellow arrows to select RTMP Pull icon. Long press the icon to enter the following interface.




Click the icon for installation. Turn on Bluetooth to pair TAO 1mini-HN with your mobile phone, (For more details, please refer to [Bluetooth](#)), so that you can import RTMP stream-address via TAO APP.

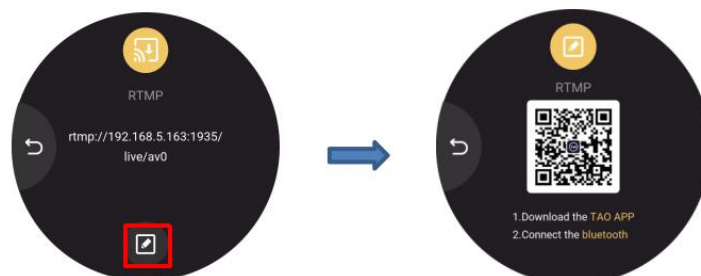

Play Video in U Disk


Insert U disk to USB 3.0 port of TAO 1mini-HN to play the video stored.

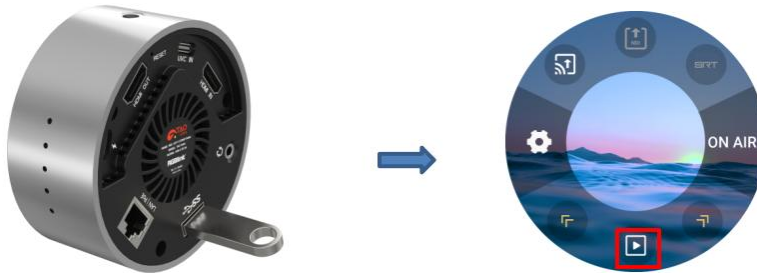


Users can choose different videos by wiping the screen and click






icon on the left to switch video-playing mode.




Click to pause.



Click to play.

 : Random Play;  : List Circulation;  : Single Play

Output Area

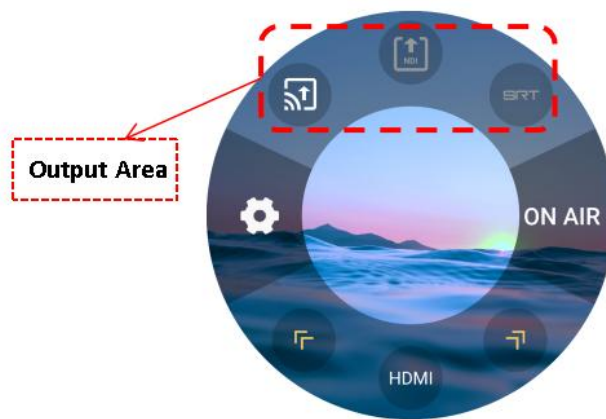

Users can operate two functions in Output Area, including RTMP Push and NDI Encoding.

RTMP Push

Long press the RTMP Push icon in output area to check the RTMP stream address of TAO 1mini-HN.




TAO 1mini-HN supports RTMP stream address modification. Users can download TAO APP to import new stream address.




Users can operate RTMP Push via USB disk or TAO APP. For more specific steps, please refer to [3.2.1 RTMP Push in User Manual](#).




After importing stream address, users can choose the streaming platform, check RTMP stream address by long-pressing and click cross icon for address deletion. The green circle outside indicates the platform you chose.

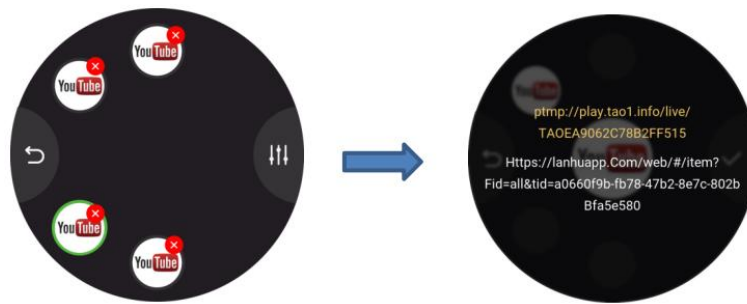


Users can also set resolution, bitrate and display mode by clicking .

After all parameters are set, click [ON AIR] in the main interface to turn on RTMP Push function.

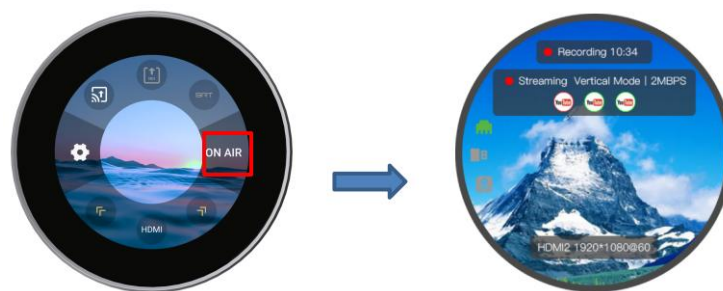

NDI Encoding

Click NDI Encoding icon in output area to turn on NDI Encoding function and long press the icon to choose encoding format (NDI | HX by default), set resolution, bitrate and check channel name.

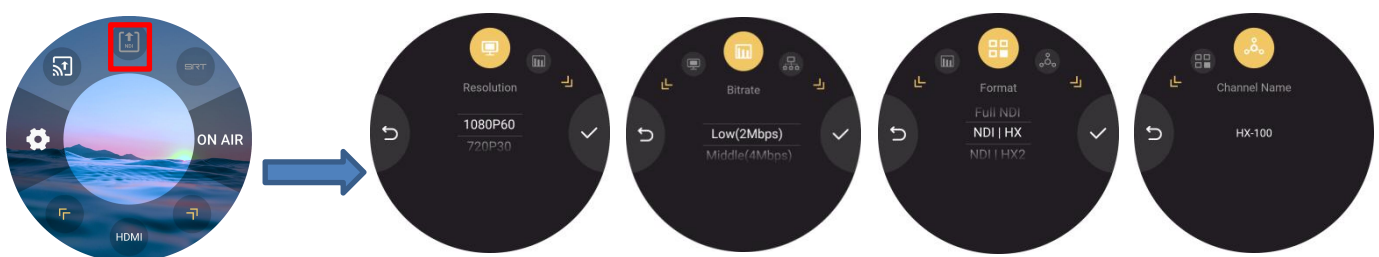


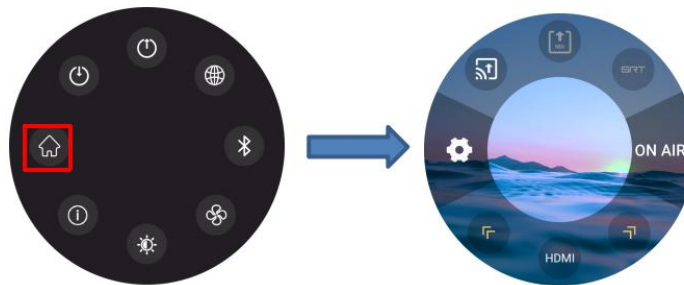
Settings




Click Settings on the left to operate more functions, including Go to Homepage, Input Settings, Output Settings, Network, Bluetooth, Fan Speed, Display and Device Info.


Go to Homepage

Click  to return to the main interface of TAO 1mini-HN.



Input Settings


Click  to enter to operate five functions, including RTMP Pull, NDI Decoding, UVC Input Settings, Video Playing and Audio Settings.

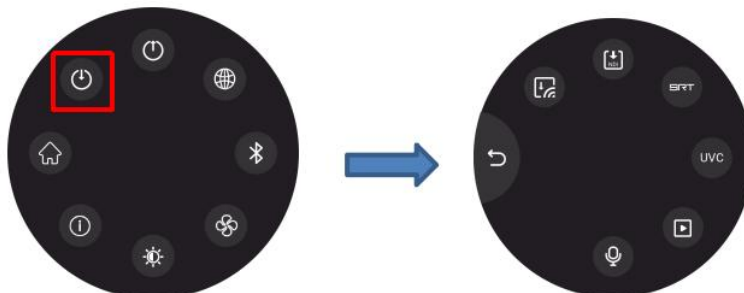


In Input Settings part, users can turn on/off audio by swiping the screen, shown as below.




Output Settings

Click  to enter to operate six functions, including RTMP Push, NDI Encoding, USB Recording, HDMI Output Settings, UVC Output Settings and Audio Settings.

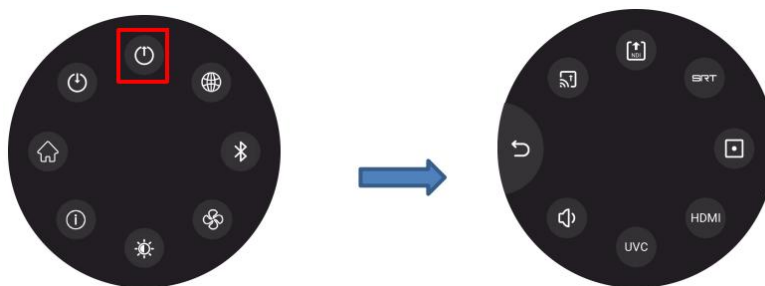


RTMP Push and NDI Encoding have been introduced in Output Area already. Therefore, please refer to the previous chapter.


For USB Recording, TAO 1mini-HN can be used as a recorder. Users can set resolution, bitrate and check disk info.

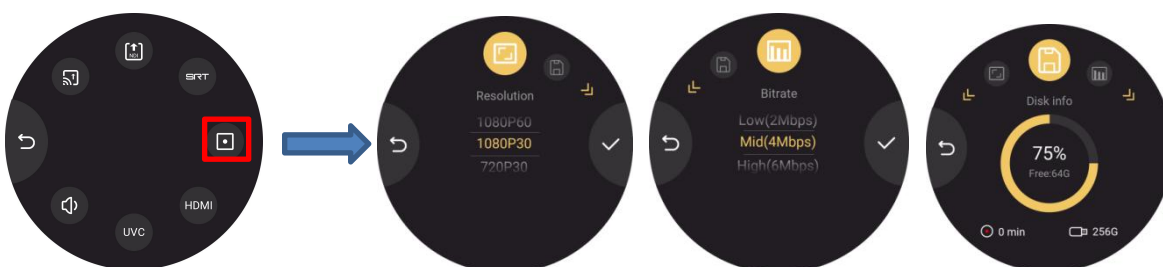


For HDMI Output Settings, users can set HDMI output resolution by swiping the screen.

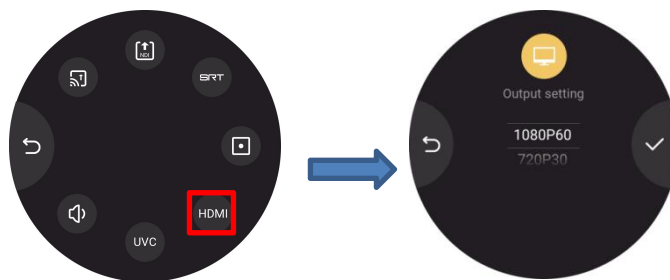

For UVC Output Settings, users can set UVC output resolution, turn on/off mirror mode and adjust display mode.

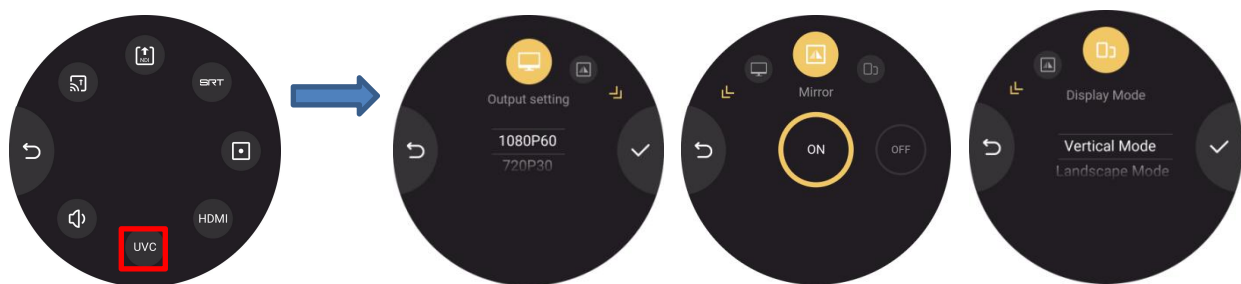

For Audio Setting, users can set output volume at free or choose 0 to turn on mute mode.

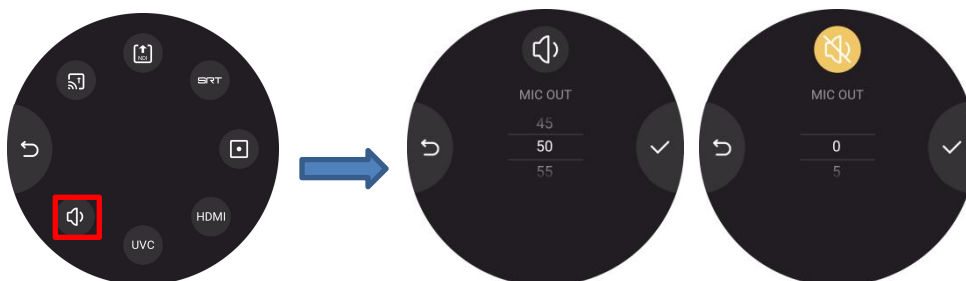


Network

Click network icon to turn on DHCP for automatic capture of IP address, netmask and gateway or set IP address, netmask and gateway manually.



Bluetooth


Click Bluetooth icon to turn on Bluetooth for pairing TAO 1mini-HN with TAO APP installed in your mobile phone, so that users can import new stream address.

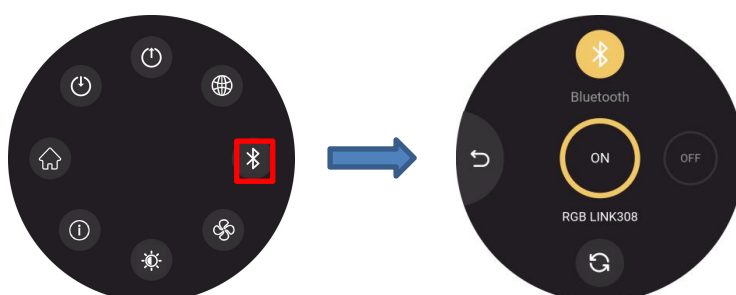

Notice: 1. Make sure the distance between TAO 1mini-HN and mobile phone is within 2m.
2. Pair TAO 1mini-HN with TAO APP within 300s.

Fan Control

Click Fan icon to adjust fan speed for heat dissipation.

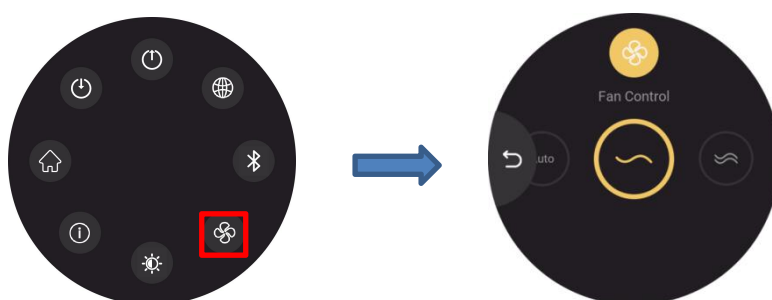


Display

Click Display icon to adjust brightness and display mode.



About TAO 1mini-HN


Click Information icon to check device information, set language, upgrade TAO 1mini-HN and choose factory reset.

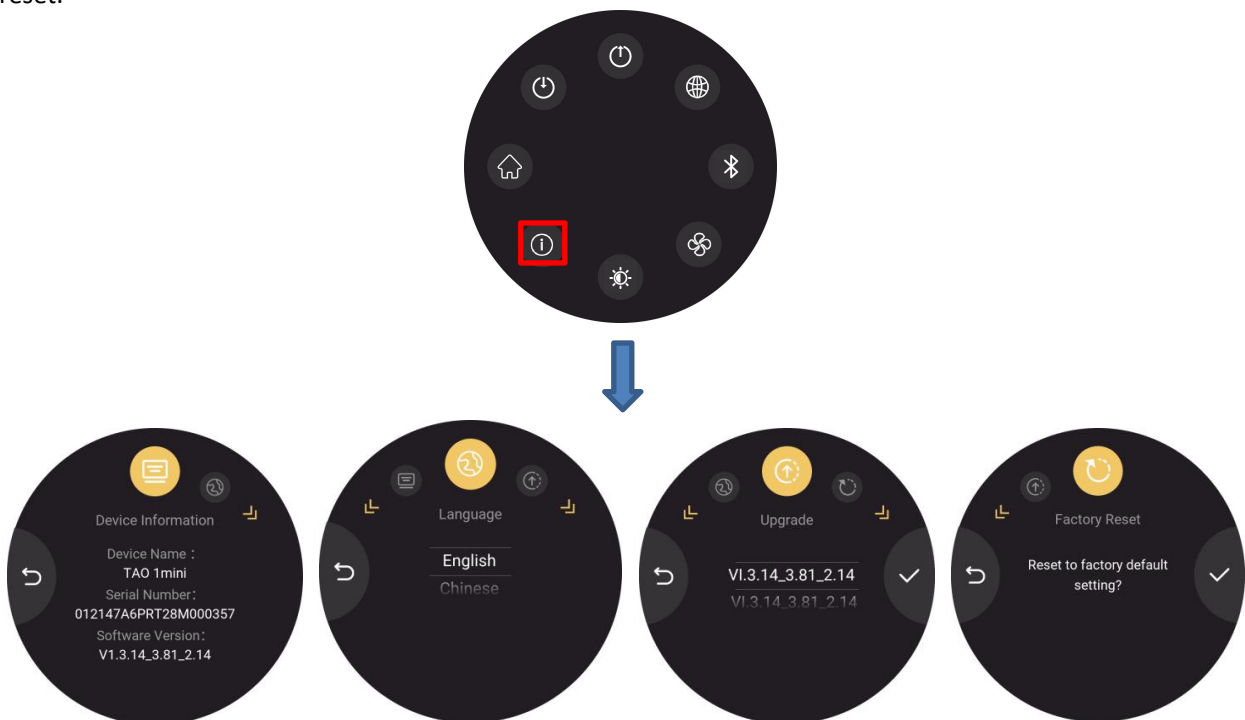

- Notice: 1. Keep TAO 1mini-HN plugged in during upgrading.
2. Make sure file for upgrade is valid on the USB disk.

ON AIR

If operations for RTMP Push are successful, then click ON AIR in the main interface and TAO 1mini-HN will start streaming. When TAO 1mini-HN recognizes the USB flash drive, it will start recording.

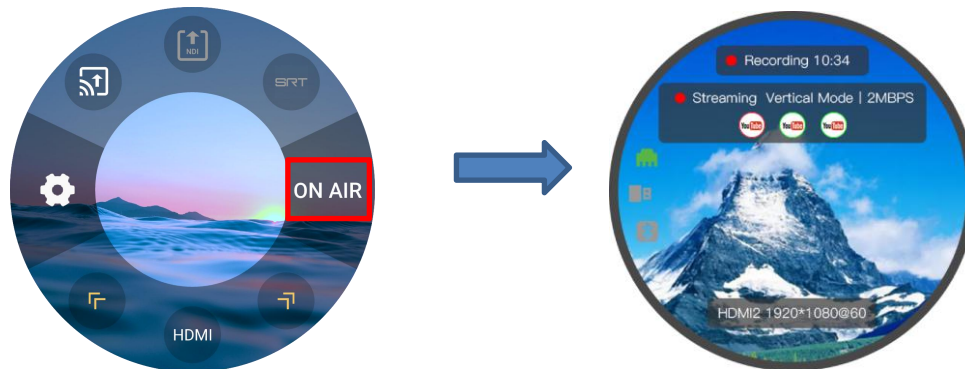







User can do the following operations:

- 1: Hide the setting options by clicking the blank screen. And the interface will display information about streaming.
- 2: On the basis of operation 1, click the screen again to hide all the information but to display the streaming image only.
- 3: On the basis of operation 2, click the screen again to restore the setting interface.

Status Display Area

The left area of interface displays the status of the TAO 1mini-HN.



	no network input		no USB		Bluetooth not connected
	with network input		USB inserted		Bluetooth connected

Contact Information

Warranty:

All products are designed and tested to the highest quality standard and backed by 1 year parts and labor warranty. Warranties are effective upon delivery date to customer and are non-transferable. RGBlink warranties are only valid to the original purchase/owner. Warranty related repairs include parts and labor, but do not include faults resulting from user negligence, special modification, lighting strikes, abuse(drop/crush), and/or other unusual damages.

The customer shall pay shipping charges when unit is returned for repair.

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

- **Tel:** +86-592-5771197
- **Fax:** +86-592-5788216
- **Customer Hotline:** 4008-592-315
- **Web:**
 - ~ <http://www.rgblink.com>
 - ~ <http://www.rgblink.cn>
- **E-mail:** support@rgblink.com

