

Quad 3G SDI Input Module



Key Feature

- Fully modular architecture
- Resolution up to 1080p@60
- Long line auto-equalization
- Support hot swap


Specification

| | | |
|--------------------|-------------------|--------------------------------|
| Connectors | Input | 8×BNC(4 In 4 Loop) |
| Performance | Input Resolutions | SMPTE 720p@50/60 1080p@50/60 |
| Physical | Weight | 0.3kg |
| | Dimension | 199.5mm×160mm×20mm |

Order Codes

| Product Code | Item |
|---------------|--------------------------|
| 791-0020-12-0 | Quad 3G SDI Input Module |

Dimension

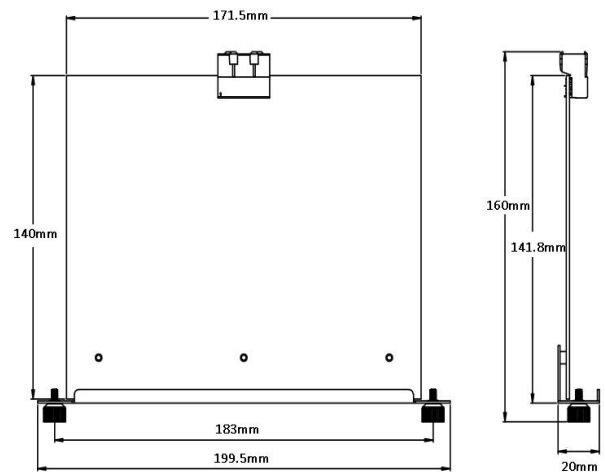

Compatibility

This module can be used in the following products.

| Product Code | Item |
|------------------|------------|
| 711-0020-02-0-16 | Q16pro-2U |
| 711-0020-01-0-16 | Q16pro-4U |
| 711-0020-04-0-16 | Q16pro-8U |
| 711-0020-05-0-16 | Q16pro-14U |
| 711-0020-06-0-16 | Q16pro-18U |
| 711-0020-07-0-16 | Q16pro-26U |

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgblink.com

