

# TAO 1pro




## Key Features

- 5.5 inch HD touch screen for operation
- Network HD streaming
- Seamless switcher
- Asynchronous rotation of main screen and HDMI output
- 2\*UVC inputs, 2\*HDMI 1.3 input and 1\* HDMI 2.0 output
- HDCP supported
- Bluetooth 5.0
- NDI 5.0 encoder
- NDI decoder
- Support image function: oscillograph, vectorgraph histogram, etc
- Sound column
- Recording via USB 2.0 port, mobile hard disk stores up to 2T
- Multistream up to 4 Live Streaming platform Simultaneously
- Compatible with SONY NF970 and Panasonic AG-VBR59MC standard battery socket (no battery install for standard version)

## Application



## Dimension

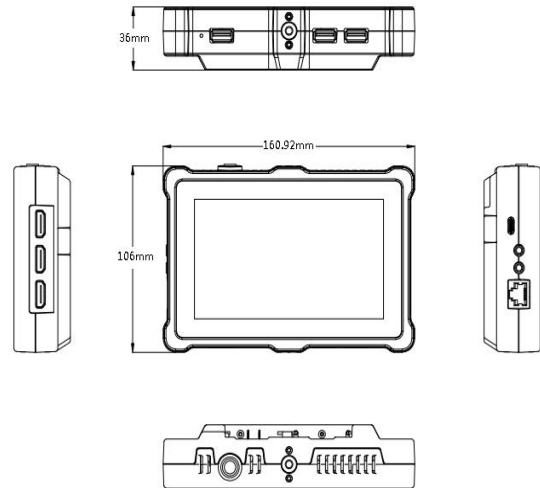

## Order Codes

Product Code	Item
410-5513-01-0	TAO 1pro
410-5513-01-1	TAO 1pro-S
490-5513-01-0	TAO 1pro lithium battery(optional)

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



## Specification

<b>Connectors</b>	Input	HDMI 1.3	2×HDMI-A	
		USB 3.0	2×USB TypeA	
	Output	HDMI 2.0	1×HDMI-A	
	Record	USB 2.0	1×USB TypeA	
	Audio	In	1×3.5mm Audio Jack	
		Out	1×3.5mm Audio Jack	
	Communication/Stream	LAN	1×RJ45	
Power		1×USB-C		
<b>Performance</b>	Input Resolutions	HDMI		
		SMPTE	720p@50/60   1080p@23/24/60	
		VESA	1024×768@60   1280×720@60   1280×800@60   1280×1024@60   1360×768@60   1600×1200@60   1680×1050@60   1920×1080@60	
	Output Resolutions	HDMI		
SMPTE		720p@50/60   1080p@24/25/50/60   2160p@60		
VESA		1024×768@60   1280×720@50/60   1280×800@60   1280×1024@60   1360×768@60   1920×1080@50/60   3840×2160@60		
Supported Standard	HDMI	1.3(Input)   2.0(Output)		
	USB	3.0		
<b>Screen Feature</b>	Screen Dimension	5.5" TFT		
	Resolution	1080×1920 pixels		
	Dot Pitch	0.063(H)×0.021(W)(mm)		
	Aspect Ratio	16:9		
	Brightness	450cd/m <sup>2</sup>		
	Contrast	1000:1		
	Backlight	LED		
	View Angle	80°/80°(L/R)80°/80°(U/D)		
<b>Power</b>	Input Voltage	9V/2A		
	Max Power	18W		
<b>Environment</b>	Temperature	0°C~55°C		
	Humidity	5%~85%		
<b>Physical</b>	Weight	Net	0.35kg(without battery);882g(with battery)	
		Package	0.77kg(1pcs) 19.6kg(20pcs)	
	Dimension	Net	161mm×106mm×36mm	
		Package	255mm×145mm×85mm(1pcs) 565mm×490mm×345mm(20pcs)	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

**RGBlink**<sup>®</sup>

www.rgblink.com

