




Key Feature

- 8K@60 input, HDCP 2.2
- XPOSE control, Web Server control (to be published)
- Hot swap
- Open API
- Support multi-interface copy output, zoom in and out
- HDR 10 compliance


Specification

Connectors	Input	Standard	HDMI 2.1	1×HDMI-A
	Output	Standard	HDMI 2.0	4×HDMI-A
	Communication	Standard	Genlock In/Loop (to be published)	2×BNC
			LAN (to be published)	1×RJ45
			RS232	1×RJ11
	Control	Standard	LAN (to be published)	1×RJ45
Performance	Input Resolutions	HDMI 2.1	VESA 1920×1080@60 3840×2160@23.98/24/25/29.97/30/50/59.94/60/120 4096x2160@50/59.94/60 7680x4320@23.98/24/25/29.97/30/50/59.94/60 (YUV 420, 8bit)	
	Output Resolution	HDMI 2.0	SMPTE 1080p@30/50/60 2160p@30/50/60 VESA 1080p@30/50/60 2160p@30/50/60	
	Supported Standard	HDMI	2.1	
	Grey Level	10/12 bit for 8K30, 8 bit for 8K60		
Power	Input Voltage	AC 100V-240V, 50/60Hz		
	Max Power	60W		
Working Environment	Temperature	0℃ ~ 70℃		
	Humidity	15% ~ 85%		
Physical	Device Weight	7.2kg		
	Packaged Weight	8.5kg		
	Device Dimension	484mm×378mm×88.9mm		
	Packaged Dimension	530mm×530mm×130mm		

Application

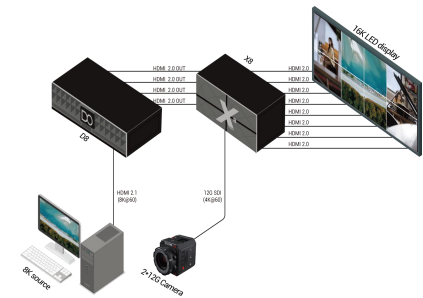

Dimension

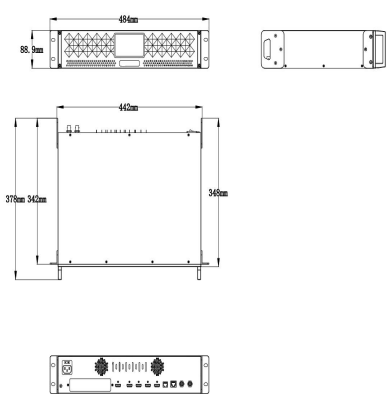

Order Codes

Product Code	Item
130-0008-01-0	D8

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
Specifications are correct at time of printing and subject to change or alteration without notice.

