




*Pad not included


Application

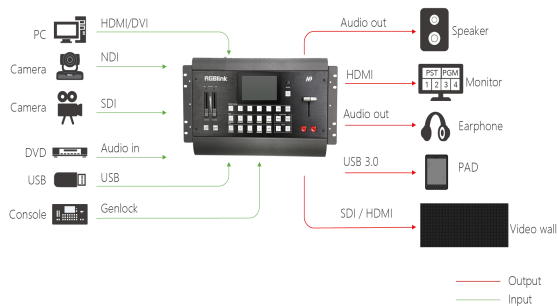

Key Features

- Module based design for wide range in/out request
- Module hot swappable
- Preview 4 inputs
- Seamless switching between PST and PGM
- Support NDI decoding
- Multiple audio outputs available
- Streaming via USB 3.0 output module and mobile phone
- 2 video layers plus additional layers for OSD, LOGO, STILL
- Mask for foreground layer including support for user defined mask
- Compatible with all kinds of Digital Displays
- Genlock Y In
- Multiple Presets and savable to the external USB disk
- 14 Transition Effects on the T-bar and TAKE button
- PTZ VISCA control compatible

Dimensions

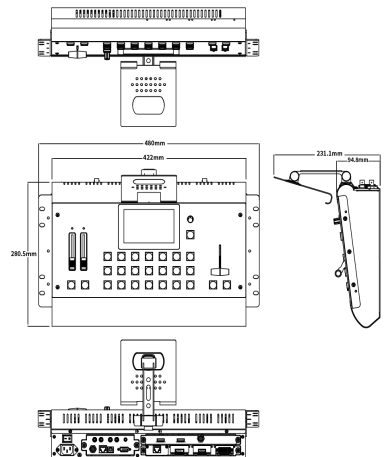

* M1 with optional fitted rack and wings/sides

Order Codes

Product Code	Item
220-0001-01-0	M1
220-0001-04-0	M1-NDI
290-0001-03-0	Output Module PGM HDMI/SDI/USB 3.0 PVW HDMI
290-0001-05-0	Output Module PGM HDMI/USB 3.0 PVW HDMI
190-0001-04-2	Single DVI Input Module

Product Code	Item
190-0001-07-2	Single 3G-SDI Input/Loop Module
290-0001-08-0	Single NDI Input Module
190-0001-10-2	Single USB2.0 Input/Backup Module
190-0001-13-2	Single HDMI Input Module
930-0002-01-0	Wings/Sides for M1 (Pair)
930-0002-02-0	Rack for M1

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Connectors	Input	1 slot up to 4 single inputs <i>Standard with</i> NDI Module 2×RJ 45 <i>Select from</i> DVI Module 1×DVI-I (compatible with DVI/VGA/YPbPr/CVBS) HDMI Module 1×HDMI-A SDI Module 2×BNC (1 In 1 Loop) USB Module 2×USB (1 In 1 backup) NDI Module 1×RJ 45
	Output	1 slot up to 2 single outputs <i>Select from</i> With USB 3.0/SDI 2×HDMI-A 1×BNC 1×USB-A With USB 3.0 without SDI 2×HDMI-A 1×USB-A
	Audio	IN L/R 2×RCA OUT L/R 2×RCA OUT 1×3.5mm Stero Jack
	Communication	LAN 1×RJ 45 Tally 1×DB15 USB 1×USB Type B Genlock Y 1×BNC
	Power	1×IEC
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60 DVI HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×960@60 1280×1024@60 1400×1050@60 1600×1200@60 1920×1080@60
	Output Resolutions	<i>Select from below or customized</i> SDI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 HDMI SMPTE 720p @50/59.94/60 1080p@50/59.94/60 VESA 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60 USB 3.0 (follow HDMI) 1024×768@60 1280×720@60 1280×1024@60 1360×768@60 1920×1080@60
	Supported Standards	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI HDMI 1.3 DVI Single Link NDI decoding NDI HX2 USB 3.0
Features	Layers	2
	MASK Edit	Support
	Brightness	Standard range
	EDID Management	Yes
Power	Input Voltage	AC 85V-264V, 50/60Hz
	Max Power	120W
Working Environment	Temperature	0– 55°C
	Humidity	10% - 90%
Physical	Weight	Net 5.5kg Package 8kg
	Dimensions	Net 480mm×280.5mm×231.1mm Package 585mm×410mm×205mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

