


M2




Key Features

- 3 slots up to 9 user fit input modules
- Support hot swap modules
- Preview 8 inputs
- Seamless switching between PST and PGM
- Output splicing up to 4K2K/8K1K
- Independently control two different displays
- 3 video layers plus additional layers for OSD, LOGO, STILL
- Mask feature for foreground layer including support for user defined mask
- Compatible with all display types
- Genlock Y In
- Save Presets and settings on board and to USB
- 15 Transition Effects on the T-bar and TAKE button

Application

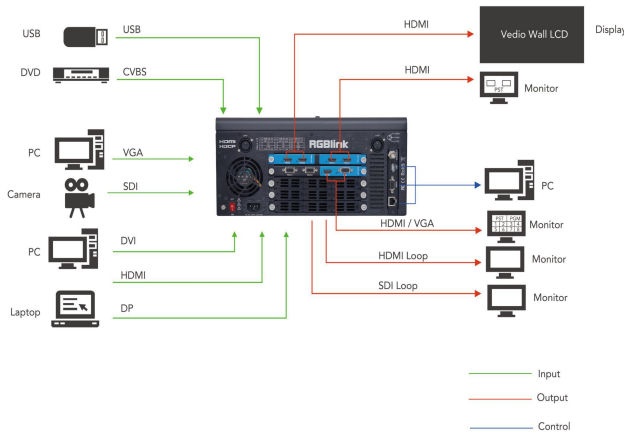

Dimensions

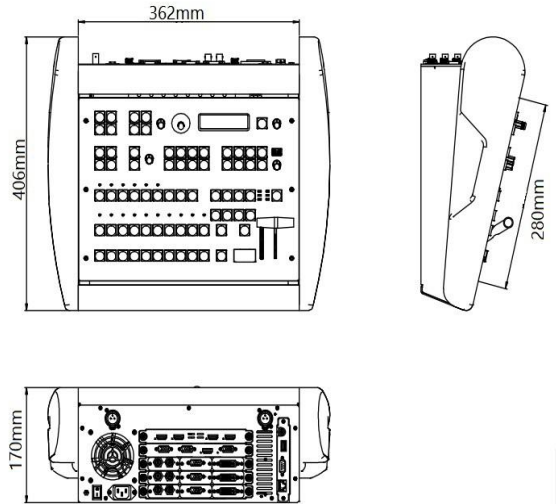

M2 with optional wings/sides

Order Codes

Product Code	Item
210-3072-12-0	M2
210-3072-20-0	M2S
190-0001-02-1	Single VGA Input Module
190-0001-03-1	Single DisplayPort Input Module
190-0001-04-1	Single DVI Input Module
190-0001-06-1	Single HDMI Input Module
190-0001-07-1	Single 3G SDI Input/Loop Module
190-0001-09-1	Single CVBS Input/Backup Module
190-0001-10-1	Single USB Input/Backup Module
980-0001-01-1	EXT Input Interface

Product Code	Item
190-3072-12-0	HDMI PGM Module for M2
190-3072-13-0	SDI HDMI PGM Module for M2s
190-3072-11-0	PVW Tally Module
900-2005-01-1	Flightcase for M2S
930-0001-01-0	Wings/Sides (Pair) for M2
980-0006-01-0	LED Gooseneck Lamp

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgblink.com



Specification

Connectors	Input	3 slots up to 9 inputs <i>Select from</i>	
		DVI Module	1 x DVI-I
		HDMI Module	2 x HDMI-A (1In 1 Loop)
		DP Module	1x DisplayPort
		SDI Module	2 x BNC (1 In 1 Loop)
		VGA Module	1 x VGA
	CVBS Module	2 x BNC (1 In 1 backup)	
	USB Module	2 x USB 2.0	
	Output	M2	M2s
		<i>Standard with</i>	<i>Standard with</i>
	HDMI	4xHDMI-A	HDMI 4xHDMI-A
			<i>Optional SDI Module</i>
			SDI 2xBNC
			HDMI 2XHDMI
	PVW	1 x HDMI-A 1 x DSUB15	
	Communication	Tally	2 x DSUB15
		LAN	1 x RJ 45
		RS 232	1 x DB9
		USB	1 x USB
		Genlock Y	1 x BNC
	Power	1 x IEC	
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/59/59.94/60 1080psf@23.98/24/25/29.97/30 DVI HDMI USB SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60 1280x720@60 1280x800@60 1280x960@60 1280x1024@60 1400x1050@60 1600x1200@60 1920x1080@60 2048x1152@60 VGA VESA 800x600@60 1024x768@60 1280x720@60 1280x800@60 1280x960@60 1280x1024@60 1400x1050@60 1440x900@60 1600x1200@60 CVBS SMPTE 480i 576i	
	Output Resolutions	<i>Select from below or customized</i> HDMI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60	
	Supported Standard	SDI SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI HDMI 1.3 DVI 5-DVI DisplayPort 1.0 VGA UXGA USB 2.0	
Features	Preview	8 inputs	
	Operation Modes	Standard 2K 4K1K 4K2K Matrix Presentation	
Power	Input Voltage	AC 85V-264V, 50/60Hz	
	Max Power	120W	
Enviroment	Temperature	0– 55°C	
	Humidity	10% - 90%	
Physical	Weight	Net	14.6kg
		Package	27kg
	Dimensions	Net	462mmx406mmx170mm
	Package	610mmx580mmx395mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgbink.com

