

MSP 325S

SDI Encoder




Key Features

- Support one main stream and three sub stream to different platform
- Support RTMP/ SRT stream to live platform
- Support WEB management
- Preview main/sub stream on WEB
- OSD can be configured on main/sub stream respectively
- Support words,logo,scrolling text and time for OSD

Specification

Connectors	Input	SDI	2×BNC (1 In/1 Loop)
		Audio	1×3.5mm Jack
	Output	H.265	1×RJ45
	Power		1×DC Jack
Performance	Input Resolutions	SDI	
		SMPTE	720p@23.98/24/25/29.97/30/50/59.94/60 1080i@23.98/24/25/29.97/30/50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60
	Output Resolutions	H.264 H.265	480×320 480×360 480×384 480×480 544×480 608×448 640×360 640×480 704×576 720×404 720×480 720×540 720×576 850×480 1024×576 1280×720 1680×1056 1920×1080
Supported Standard	SDI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI	
	H.265	baseline profile/main profile/high profile	
Power	Input Voltage	DC 12V, 2A	
Environment	Working Temperature	-20 ~ 60°C	
	Humidity	0 ~ 65%	
Physical	Weight	0.3kg	
	Dimensions	155mm×103mm×32mm	

Application

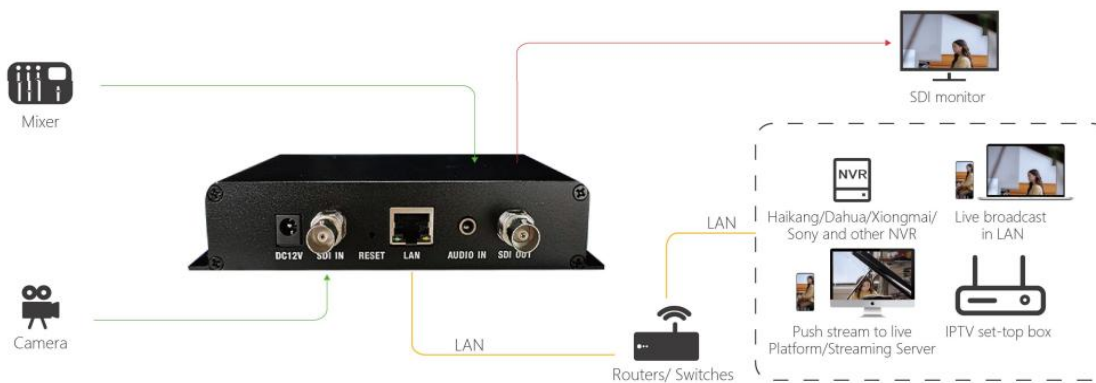

Order Codes

Product Code	Item
601-0325-03-0	MSP 325S

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
 Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
 www.rgblink.com

