

D8



Key Feature


- 8K@60 input, HDCP 2.2 compliance
- Built-in 4" LCD touch screen control
- 8K EDID management
- Genlock synchronization unequal splicing, multiple splicing layouts available
- Layer cropping and scaling
- Genlock input and loop through
- XPOSE 2.0 control
- Support standard output resolution and customize output resolution
- Hot swap
- Open API

Specification


Connectors	Input	Standard	HDMI 2.1		1×HDMI-A
		Optional	DP 1.4 (preliminary)		1×DP
	Output	Standard	HDMI 2.0		4×HDMI-A
	Communication	Standard	Genlock In/Loop (preliminary)		2×BNC
			LAN (preliminary)		1×RJ45
			RS232		1×RJ11
	Power				1×IEC
Performance	Input Resolutions	Automatic recognition			
		HDMI 2.1			
		SMPTE	720p@50/60 1080p@30/50/60 2160p@25/30		
		VESA	1024×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1920×1200@60		
		VESA	2560×1440@60 2560×1600@60/120 3840×2160@30/60 4096×2160@50/59/60 7680×4320@30/60 custom resolution		
		DP 1.4			
		SMPTE	720p@50/60 1080p@30/50/60 2160p@25/30		
		VESA	1024×768@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1920×1200@60		
		VESA	2560×1440@60 2560×1600@60/120 3840×2160@30/60 4096×2160@50/59/60 7680×4320@30/60 custom resolution		
	Output Resolution	Select standard resolution or custom resolution			
	HDMI 2.0				
	SMPTE	720p@50/60 1080p@30/50/60 2160p@30/60			
	VESA	1024×768@60 1280×800@60 1280×1024@60 1360×768@60 1400×900@60 1440×900@60 1600×1200@60			
	VESA	1920×1200@60 2048×1152@60 3840×2160@30/60 4096×2160@60 custom resolution			
Supported Standard	HDMI	2.1			
	DP	1.4			
Power	Input Voltage	AC 100V-240V, 50/60Hz			
Working	Temperature	0℃ ~ 45℃			
Environment	Humidity	15% ~ 85%			
Physical	Device Weight	7.2kg			
	Packaged Weight	8.5kg			
	Device Dimension	484mm×378mm×88.9mm			
	Packaged Dimension	530mm×530mm×130mm			

* 8K60 input resolutions and 4K60 output resolutions supported; downward compatible with other custom input/output resolutions

Application

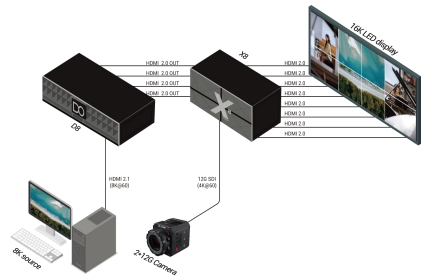

Dimension

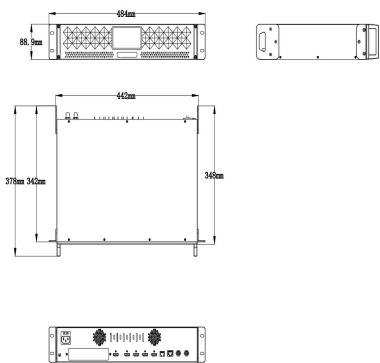

Order Codes

Product Code	Item
130-0008-01-0	D8

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China
Specifications are correct at time of printing and subject to change or alteration without notice.

