


Model		Q16pro Gen2 2U		Q16pro Gen2 4U		Q16pro Gen2 8U		Q16pro Gen2 14U (preliminary)	
Specification		2U		4U		8U		14U	
Input Slots		3		4		10		20	
Output Slots		2		4		10		20	
Shared Slots		nonsupport		Output slot No.1~No.4		Output slot No.1~No.8		Output slot No.1~No.18	
Interface	Net Weight	6.0kg		8.5kg		15.0kg		20.0kg	
	Package Weight	9.7kg		12kg		20.0kg		25.0kg	
	Net Dimension	483.4x377x89mm		483.4mm x 446mm x 178mm		488×370×355.6mm		485×310×560mm	
	Package Dimension	630x585x250mm		630mm x 585mm x 250mm		665×525×495mm		665×525×495mm	
Physical	Input Connectors	Optional	DVI	4×DVI-I (Compatible HDMI/DVI/VGA/YPbPr/CVBS)		SDI (SD/HD/3G)		8×BNC(4 In 4 Loop)	
			DVI	4×DVI-I		HDBaseT (preliminary)		4xRJ45	
			HDMI 1.3	4×HDMI-A		H.265		1×RJ45	
			DP1.2 HDMI2.0	2×DP 2×HDMI-A					
	Output Connectors	Optional	DVI	4×DVI-I		HDMI2.0		2×HDMI-A	
			HDMI1.3	4×HDMI-A		HDBaseT (preliminary)		4xRJ45	
			SDI	4×BNC					
Communication Connectors	Optional	Genlock	2×BNC (1 In 1 Loop)		LAN		1×RJ45		
		RS232	1×RJ11		PVW		1×HDMI-A		
	PVW Connectors	Optional	HDMI	2×HDMI-A					
Connectors	Input Resolutions	Select from below or configure customized							
		HDBaseT							
		SMPTE	720p@50/60 1080p@30/50/60						
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60						
		H.264/H.265							
		SMPTE	720p@50/60 1080p@30/50/60 2160p@30						
		DVI HDMI 1.3							
		SMPTE	720x480p@60 720x576p@50 1280x720p@23.98/24/25/29.97/30/50/59.94/60 1920x1080i@50/59.94/60 1920x1080p@24/25/29.97/30/50/59.94/60 Custom						
		VESA	800x600p@60/75/85 1024x768p@60/75/85 1280x800p@60 1280x1024p@60/75/85 1360x768p@60 1366x768p@60 1440x900p@60 1400x1050p@60 1680x1050p@60 1920x1080p@60 1920x1200p@60 Custom						
		SDI (SD/HD/3G)							
		SMPTE	720p@50/60 1080p@23.94/24.97/25/30/50/60 1080i@50/60						
		DP 1.2 HDMI 2.0							
		SMPTE	720p@50/60 1080p@30/50/60 2160p@60						
	VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60 1920×1200@60 3840×2160@30/60							
	Output Resolutions	Select from below or configure customized							
		DVI HDMI1.3							
		SMPTE/ VESA	1024x768p@60 1280x720p@50/59.94/60 1280x800p@60 1280x1024p@60 1360x768p@60 1366x768p@60 1400x1050p@60 1440x900p@60 1600x1200p@60 1680x1050p@60 1920x1080p@23.98/24/25/29.97/30/50/59.94 /60 2560x816p@60 2048x1152p@60 Custom						
		HDBaseT							
		SMPTE	720p@50/59.94/60 1080p@50/59.94/60						
		VESA	1024×768@60 1280×1024@60 1920×1080@25/30/50/59.94/60						
		SDI (SD/HD/3G)							
		SMPTE	720p@50/60 1080p@23.98/29.97/25/30/50/59.94/60 1080i@50/59.94/60						
		HDMI2.0							
		SMPTE	720p@50/60 1080p@30/50/60 2160p@30/60						
		VESA	1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60 1360×768@60 1440×900@60 1920×1200@60 3840×570@60 2560×1600@60/120 3840×2160@30/60						
Supported Standard		SDI	3G		H.265		DVI	DVI-1.0	
	HDMI	2.0		HDBaseT		1.0		DP	
Power	Input Voltage	AC 100V-240V, 50/60Hz (Supports double power supply module.)							
Working Environment	Temperature	0°C~45°C							
	Humidity	15%~85%, RH							
	Temperature	0°C~55°C							
	Humidity	5%~85%, RH							

Order Codes

Product Code	Item
710-1002-06-1	Q16pro Gen2 2U (Communication Module with PVW Included)
710-1002-01-1	Q16pro Gen2 4U (Communication Module Included)
710-1002-01-0	Q16pro Gen2 4U (Communication Module with PVW Included)
710-1002-07-0	Q16pro Gen2 8U (Communication Module Included)
710-1002-07-1	Q16pro Gen2 8U (Communication Module with PVW Included)
710-1002-08-0	Q16pro Gen2 14U (preliminary)
790-1002-01-0	Q Series Quad HDMI 1.3 Input Module
790-1002-02-0	Q Series Single IP Input Module (preliminary)
790-1002-03-0	Q Series Quad HDMI 2.0 & DP 1.2 Input Module
790-1002-04-0	Q Series Quad 3G SDI (LOOP) Input Module
790-1002-05-0	Q Series Quad DVI Input Module

Product Code	Item
790-1002-21-0	Q Series Quad HDMI 1.3 Output Module
790-1002-22-0	Q Series Communication Module with PVW
790-1002-23-0	Q Series Dual HDMI 2.0 Output Module
790-1002-24-0	Q Series Communication Module
790-1002-25-0	Q Series Quad 3G SDI Output Module
790-1002-26-0	Q Series Quad DVI Output Module
790-1002-27-0	Q Series single IP Output Module (preliminary)
950-1004-01-0	Q Series 300W Redundant Power Module

Dimensions

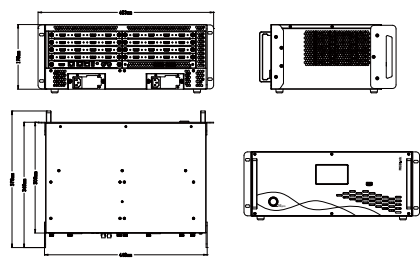

HDMI HDCP™
Proudly designed and manufactured in Xiamen Hi Technology Zone, China
WEB: www.rgblink.com EMAIL: sales@rgblink.com PHONE: +86 592 5771197



Q16 pro Gen2

Multi-Window splicing processor
for LCD & LED Videowall



Q16pro Gen2 is a high-performance video image processing system and high-performance video splicing server using pure hardware and leading-edge FPGA processing architecture. Offering a range of input and output signals via a card-based structure, and supporting hot swap of modules, and options including redundant power supplies, Q16pro Gen2 is a stable high-performance platform that can be deployed in varied applications including corporate and visual messaging as well in retail and digital signage applications The Q16pro Gen2 models allow connection of 4K video sources as well as output to 4K, with outputs offering multi-screen and multi-layer capabilities. A host of features are built in to Q16pro Gen2, including EDID management, 3D image processing, and highly configurable OSD features at high-definition.


Multi- Layer Multi-Window

Q16pro Gen2 offers up to 8 2K windows or 4 4K windows per output slot. Layer resources able to be freely used across any of the outputs within a slot for maximum availability and efficiency, including combinations of both 2K and 4K layer windows. Q16pro layering allows multi-window applications for large scale and spanning multiple display outputs.




Frame Sizes for Every Scale

Q16pro Gen2 models range from the compact 1U through to 14U with up to 80 inputs and 80 outputs with common modules across the range. Q16pro Gen2 is truly scalable for even the largest applications .

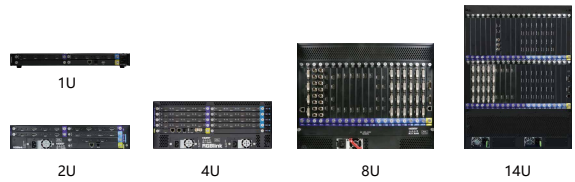


Input and output preview

Equipped with 2 high-definition multi-screen monitoring output interfaces, it can monitor 16 input or 16 output at the same time. Among them, 16 input source preview supports 4/9/16 screen division.

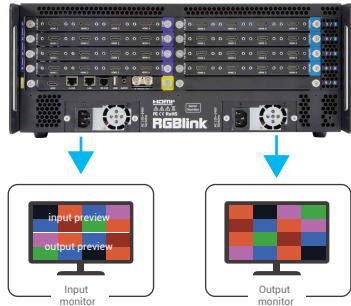


Take Control

Configure and control Q16pro Gen2 devices from the acclaimed RGBlink XPOSE apps for laptop/desktop and mobile devices.

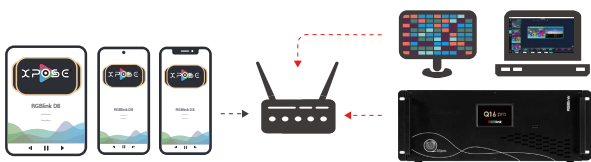

Dual network communication

Supports dual network communication: it has 1 local communication network port and 1 remote control port. In addition to remote control, the remote control port also has H.265 media remote control and monitoring functions.

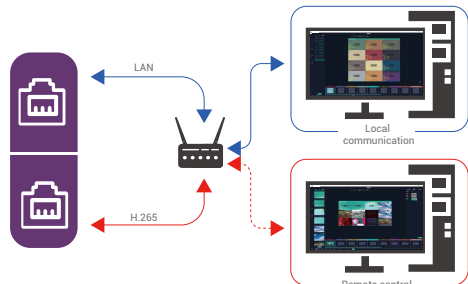

OSD Dynamic Titles

Customised text in almost any format can be overlayed on output displays. The facility supports static and dynamic arrangements including scrolling messaging.




3D stitching

Scale and deliver 3D signals for 120Hz interpolated signals with internal frame-lock synchronization. Segmentation and fusion are completely seamless. Single key switching is available to transition between 2D and 3D on demand.



Signal processing capability

The entire chassis input output and internal transmission are all 60 frames of RGB 4:4:4 signals. The signal supports 12bit processing, and the transmission rate of each channel can reach 5.9Gbps.

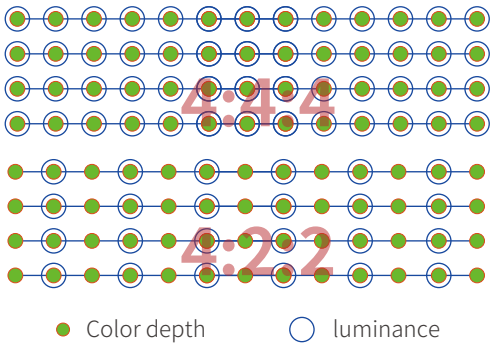


High Performance Lossless 4K Processing

Q16pro Gen2 not only supports HDMI 2.0 and DisplayPort 1.2 4K@60 signals and is engineered end-to-end to maintain and enhance fidelity with full 4:4:4 maintained throughout. Utilizing advanced processing engine developed RGBlink.



Modular Hybrid Modules

The processor offers a range of input and output modules, with signals able to be mixed-and-matched to meet requirement without incurring overhead. Modules are easily user-fit lowering TCO and simplifying operations of Q16pro based installations.

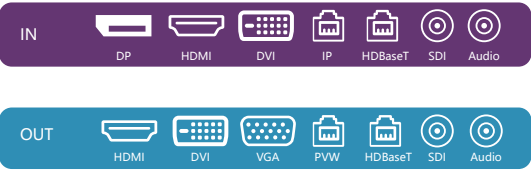

Configurable Audio Delivery

Both embedded and external/insert audio sources may be embedded to any output as well as be switched a part of video presets.

