



ASK plus p2p

4K Wireless HDMI Extender

ASK plus p2p, 4K wireless transmitter and receiver, supports 4K@60 resolution, super smooth playback with 100ms low latency.


Each TX and RX works point to point in designated channel and up to 20 TX and 20 RX can work simultaneously without interfering each other.

ASK plus p2p allows users to wireless stream the video content without latency, excellent for applications like education or digital signage.


Key Features

- Each TX and RX works point to point in designated channel and up to 20 TX and 20 RX can work simultaneously without interfering each other
- Smooth video playback
- Supports 4K@60 high definition resolution
- As low as 100ms latency
- Supports USB KVM function
- Transmission distance up to 150 meters in the clear line of sight for 1*RX
- Touch panel back control function
- Auto channel selection
- Equipped with the fast 802. 11ac 2T2R WiFi MIMO module
- High-security protection
- Suitable for outdoor rotating display

Application

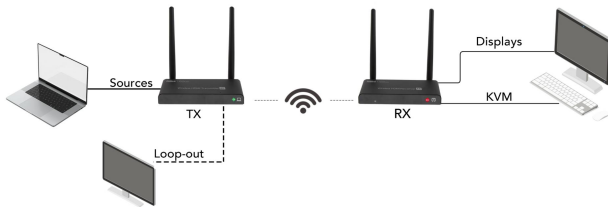

Dimension

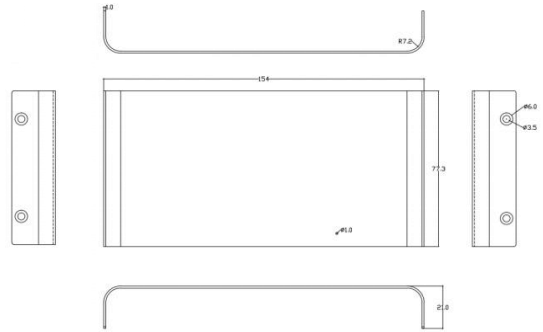

Specification

Interface	Input	TX	HDMI	1×HDMI -A
	Output	TX	HDMI	1×HDMI-A
		RX	HDMI	1×HDMI-A
	Control	TX	USB	1×Micro-USB (PC)
		RX	IR	1×IR (to be developed)
		RX	USB	2×USB-A (keyboard/mouse/touch panel control cable)
	Power	TX	USB	1×USB-C
		RX	USB	1×USB-C
Performance	Video Resolutions	SMPTE	4K@60 4K@30 4K@24 1080p@60/50/30/24 720p@60/50/30 480p	
	HDMI Version	HDMI	2.0	HDCP 1.4/2.2
	Wireless Standard	IEEE 802. 11b/g/n/ac, 2.4G/5GHz, 2T2R		
	Platform Supported	Any devices that support HDMI port		
	Latency	About 100ms latency		
	Audio	Stereo, 44. 1KHz		
	Distance	About 150 meters in the clear line of sight		
Power	Power Supply	TX	DC 5V/2A	RX DC 5V/2A
	Power Consumption	TX	7W	RX 5W
Environment	Operating Temperature	0°C to +40°C (+32°F to + 104°F)		
	Storage Temperature	- 10°C to +60°C (+14°F to + 140°F)		
	Operating Humidity	10% to 80% RH		
Physical	Net Dimension	TX	154*77.5*21mm	RX 154*77.5*21mm
	Net Weight	TX	330g	RX 330g

Order Code

Product Code	Item
450-3002-01-1	ASK plus p2p (1*TX + 1*RX)

Contact us

Tel: +86-592-5771197

Fax: +86-592-5788216

E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

RGBlink
www.rgblink.com

