


DX8


Independent Backup Controller

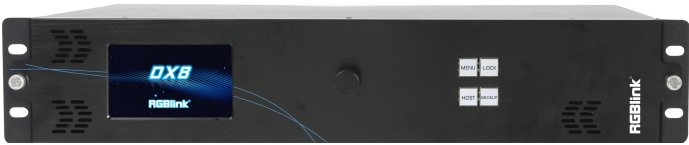


Key Features

- Input signal distribution
- Output signal backup
- Input and output signal auto adjusted
- HDMI 1.3 supports 12 bit processing and RGB 4:4:4 color space
- SDI supports 10 bit processing and RGB 4:2:2 color space
- Fully modular architecture, support hot swap
- Dual power module backup

Application

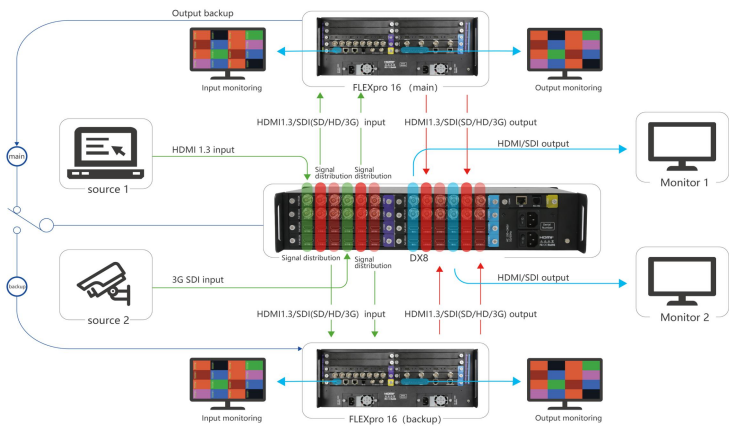

Dimensions

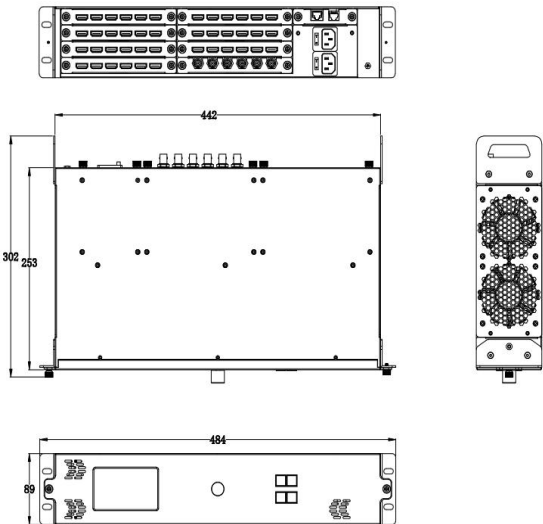

Order Codes

Product Code	Item
710-0020-02-0	DX8
790-0020-01-1	Dual HDMI 1.3 Input & Quad HDMI 1.3 Output Module
790-0020-02-1	Dual SDI Input & Quad SDI Output Module

Product Code	Item
790-0020-21-1	Quad HDMI 1.3 Input & Dual HDMI 1.3 Output Module
790-0020-22-1	Quad SDI Input & Dual SDI Output Module

- * **1. Input Module:** 2-channel inputs and 4-channel outputs, which can achieve 2 groups of 1-in & 2-out distribution for HDMI/SDI signal.
- * **2. Output Module:** 4-channel inputs and 2-channel outputs, which can achieve 2 groups of 2-in & 1-out switch for HDMI/SDI signal.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Model		DX8	
Specification		2U	
Communication Slot		1	
Input Slots		4	
Output Slots		4	
Physical	Net Weight	8kg	
	Packaged Weight	13kg	
	Net Dimension	446mm × 370mm × 89mm	
	Packaged Dimension	630mm × 585mm × 250mm	
Connectors	Input	HDMI 1.3	6×HDMI-A
		SDI (3G/HD/SD)	6×BNC
	Output	HDMI 1.3	6×HDMI-A
		SDI (3G/HD/SD)	6×BNC
	Communication	LAN	1×RJ45
		RS232	1×RJ11
性能	Input Resolution	<i>Select from below or configure customized</i>	
		HDMI 1.3	
		SMPTE	720p@50/60 1080p@25/30/50/60
		VESA	800×600@60 1024×768@60 1280×720@60 1280×800@60 1280×1024@60 1360×768@60 1366×768@60 1440×900@60 1400×1050@60 1600×1200@60 1680×1050@60 1920×1080@60
		SDI (3G/HD/SD)	
		SMPTE	720p@50/60 1080i@50/60 1080p@23.98/29.97/25/30/50/60
	Output Resolution	<i>Select from below or configure customized</i>	
		HDMI1.3	
		SMPTE	720p@50/60 1080p@25/30/50/60
		VESA	800×600@60 1024×768@60 1280×768@60 1280×1024@60 1600×1200@60 1920×1080@60
	Supported Standards	SDI	3G/HD/SD
		HDMI	1.3
Power	Input Voltage	AC 100V-240V, 50/60Hz (dual PSU)	
Operation	Temperature	0℃~70℃	
Environment	Humidity	15%~85%	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

