


bond 7UHD




Key Features

- Intelligent cloud live view and collaboration gadget
- Small and compact, easy to carry
- Synchronously record and upload
- Built-in 2-inch OLED screen for real-time monitoring
- Support power supply through NP-F battery, USB Type-C interface and DC interface
- Built-in 5G module for installing SIM card
- Support SIM Card/USB 5G Dongle/Wi-Fi Wireless Network/Ethernet Wired Network/Smartphone Tethering
- Support network aggregation
- Compatible with major cameras
- 1/4in screw hole is provided for camera mounting

Application

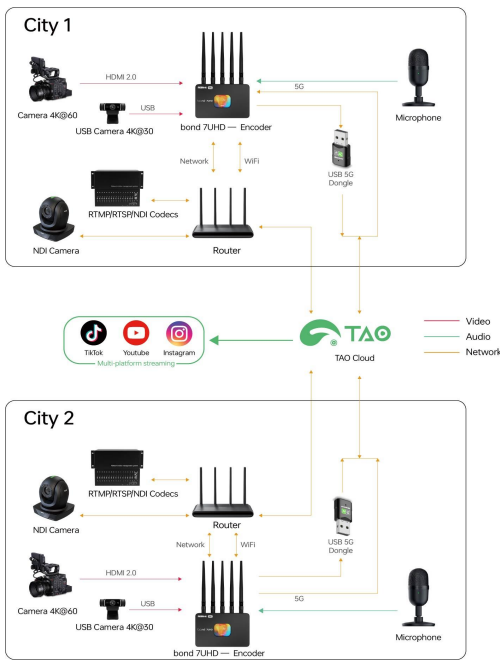

Dimensions

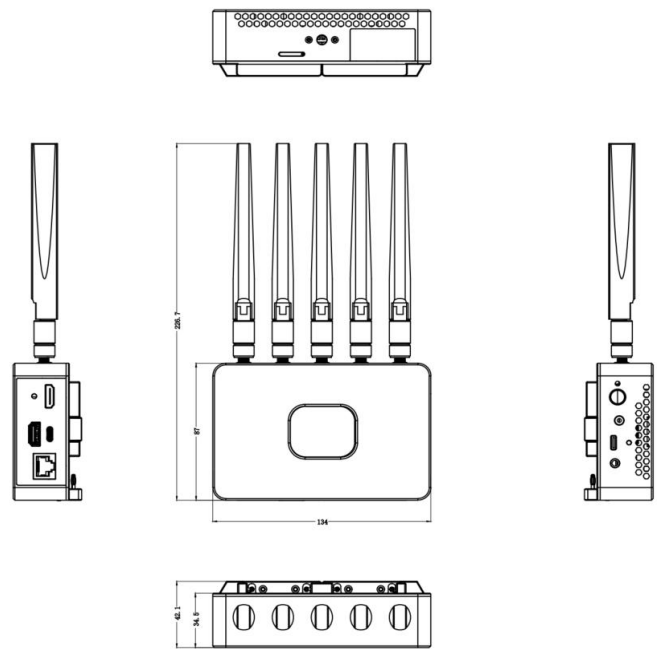

Order Codes

Order Code	Item
410-5513-06-0	bond 7UHD

Tel: +86-592-5771197 Fax: +86-592-5788216 E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice!

RGblink
www.rgblink.com



Specification

Interface	Input	HDMI 2.0	1×HDMI-A
		USB	1×USB-C
	Audio	Line-in	1×3.5mm Audio Jack
	Ethernet/Upgrade/Stream	LAN	1×RJ45
	Antenna	5G Antenna	5×Antenna Connector
	Storage	USB	1×USB-A
Power		USB	1×PD USB Type-C Port
		DC	1×DC Jack
	Battery	2×NP-F Battery	
Performance	HDMI 2.0 Input	Input Resolution	720p@50 1920×1080i@50/60 1920×1080p@24/30/50/60 3840×2160@30/50/60
		Format	RGB/YUV 4:4:4/YUV 4:2:2 8bits/10bits/12bits
		Deinterlacing	YES
		Embedded Audio	YES
		HDCP	2.3/1.4
	USB Type-C/UVC Input	Input Resolution	1920×1080p@30/50/60 3840×2160@30
	Audio Input	Audio Mixing	YES
		Analog Audio Input	LINE IN
	Record	Video	H.264, up to 32Mbps
		Audio	AAC, up to 48Kbps
	Storage	Built-in Storage	128GB
	Codec	Performance	H.264/H.265
		Protocols	HTTP/SRT/RTMP/RTSP/NDI
		Resolution	up to 3840×2160p@60
	Network	Wired Network	1×RJ45 Gigabit port
		Mobile Network	SIM card installation
		Wireless Network	Wi-Fi 5 AP mode/STA mode
		Tethering	Android smartphone
		5G Dongle	USB 5G Dongle connectivity
	Power	USB-C Input	12V/2A
DC Input		12V/2A	
Compatible Battery		2×NP-F Battery	
Working Environment	Temperature	0℃~55℃	
	Humidity	5%~85%	
Physical	Weight	Net Weight	0.42kg
	Dimension	Net Dimension	134mm × 226.7mm × 42.1mm

Tel: +86-592-5771197 Fax: +86-592-5788216 E-mail: sales@rgblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice!

