


ASK nano 4K (USB-C)




Key Features

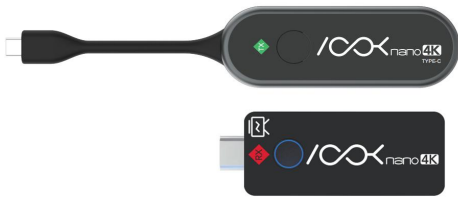


- Plug-and-Play: No software installation required.
- Pocket-sized Design: Portable and easy to use anywhere.
- Built-in Antenna: Stable 5GHz transmission with a line-of-sight range up to 20 meters.
- 4K Ultra HD with Low Latency: Supports up to 4K30 input on TX and 4K60 output on RX, with a latency of 0.1 seconds, ideal for meeting rooms.
- Mirroring and Extended Modes: Casts content from small screens to large screens, supporting both mirroring and extended display modes.
- Multi-device Connection: Supports up to 4 transmitters connected to 1 receiver, with one-key switching, meeting the needs of multiple users in meetings.
- USB-C Power Supply: The transmitter is powered directly from the source device via USB-C, free from messy wiring.

Note: The USB-C port on the source device must support DisplayPort Alt Mode.


Application

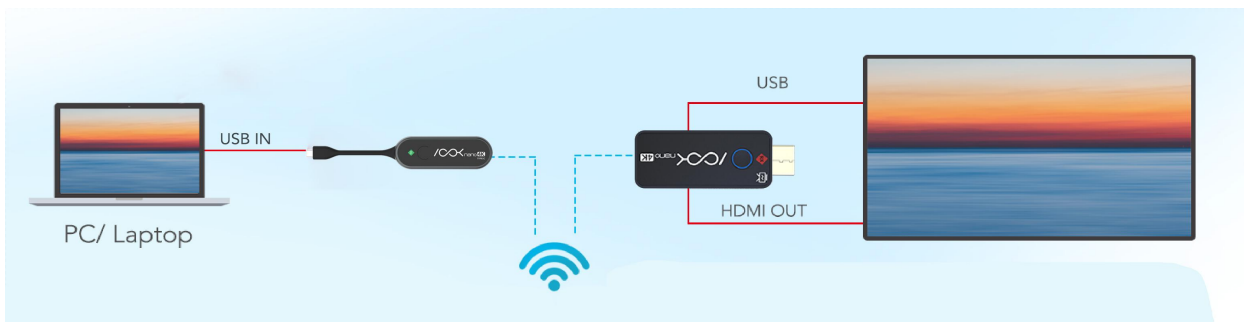

Dimension

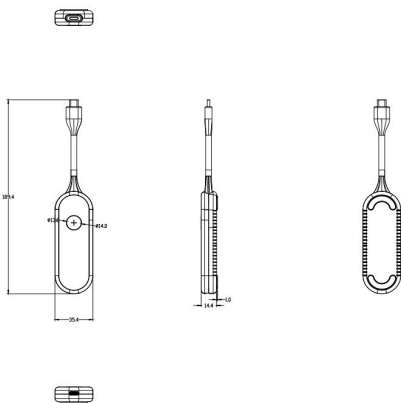

TX

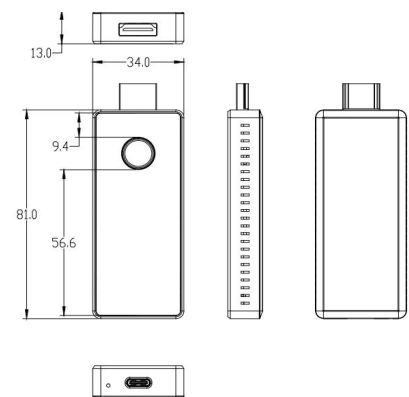

RX

unit:mm

Order Codes

Product Code	Item
450-2003-01-1	ASK nano 4K USB-C (1T1R)
450-0203-01-1	ASK nano 4K USB-C TX

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbink.com



Specification

TX	Interface	Input	1×USB-C (male)
		Power	1×USB-C (female, reverse powering supported)
	LED	Red and Blue	
	Power	DC 5V/1A	
	Consumption	5W	
	Dimension	93mm×28.3mm×13mm (cable excluded)	
	Weight	50g	
RX	Interface	Output	1×HDMI-A
		Power	1×USB-C
	Standards	HDMI	2.0
	LED	Red and Blue	
	Power	DC 5V/1A	
	Consumption	3W	
	Dimension	83mm×32mm×13mm	
	Weight	30g	
Performance	Video Input	up to 3840×2160@30	
	Video Output	up to 3840×2160@60	
	Audio	PCM	
	Wireless Channel	IEEE 802.11ac, 5GHz	
	Latency	about 100ms	
	Security	AES 128 bit	
	Platform Supported	Windows, iOS, Android system and any devices with HDMI jack	
Environment	Operating Environment	Operating Temperature	0°C ~ +40°C (+32°F to +104°F)
		Operating Humidity	10% ~ 80% RH
	Storage Environment	Storage Temperature	-10°C ~ +60°C (+14°F to +140°F)
		Storage Humidity	5% ~ 90% RH

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink
www.rgbblink.com

