


ASK nano 4K




Key Features

- 2 Standard packet for option
 - 1 transmitter & 1 receiver
 - 1 transmitter & 2 receivers support dual display
- Plug-and-Play: No software installation required.
- Pocket-sized Design: Portable and easy to use anywhere.
- Built-in Antenna: Stable 5GHz transmission with a line-of-sight range up to 20 meters.
- 4K Ultra HD with Low Latency: Supports up to 4K30 input on TX and 4K60 output on RX, with a latency of 0.1 seconds, ideal for meeting rooms and home entertainment.
- Mirroring and Extended Modes: Casts content from small screens to large screens, supporting both mirroring and extended display modes.
- Multi-device Connection: Supports up to 1 transmitter connected to 4 receivers,

Application Diagram

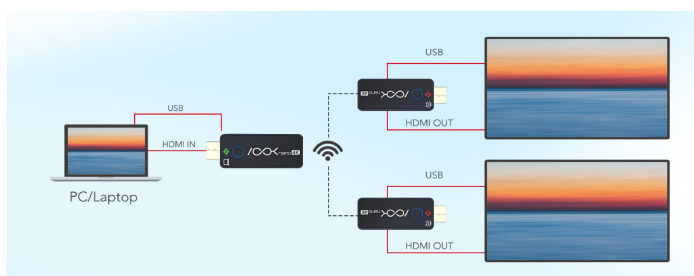

Dimensions

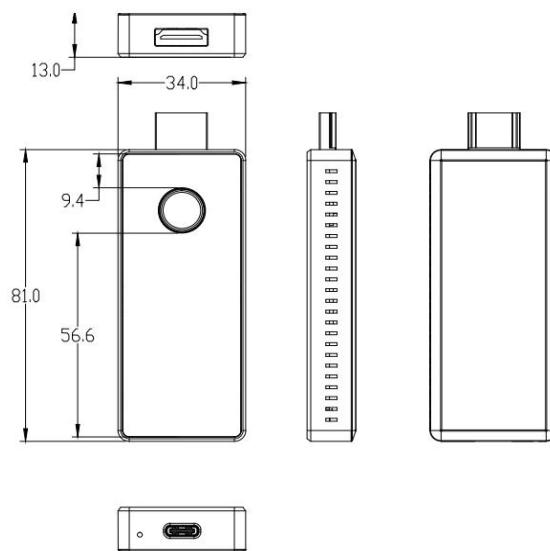

Order Codes

Product Code	Item
450-2002-01-1	ASK nano 4K (1T1R) 1 Transmitter&1 Receiver
450-2002-02-1	ASK nano 4K Set (1T2R) 1 Transmitter&2 Receivers
450-0002-02-1	ASK nano 4K RX

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.



Specification

Receiver

Connectors	Output	HDMI	1×HDMI-A
	Power	USB	1×USB-C
Performance	Output Resolutions	HDMI	
		VESA	Up to 3840×2160@60
	Supported Standards	HDMI	2.0
		HDCP	2.2
Power	Input Voltage	DC 5V/1A	
	Max Power	3.5W	
Operating Environment	Temperature	0℃～40℃	
	Humidity	10%~80% RH	
Storage Environment	Temperature	-10℃～60℃	
	Humidity	5%~90% RH	
Physical	Weight	Net	0.03kg
	Dimension	Net	91mm×34mm×13mm

Transmitter

Connectors	Input	HDMI	1×HDMI-A
	Power	USB	1×USB-C
Performance	Input Resolutions	HDMI	
		SMPTE	1080p50/60
		VESA	3840x2160@24/25/30 1920×1080@24/25/30/50/60 1280x720@50/60
	Supported Standards	HDMI	1.4b
		HDCP	1.4
Power	Input Voltage	DC 5V/1A	
	Max Power	3.5W	
Operating Environment	Temperature	0℃～40℃	
	Humidity	10%~80% RH	
Storage Environment	Temperature	-10℃～60℃	
	Humidity	5%~90% RH	
Physical	Weight	Net	0.03kg
	Dimension	Net	91mm×34mm×13mm

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbblink.com

Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

