



RGBlink®



mini-mx SDI

10 Channel Streaming Video Mixer

mini-mx SDI features four 4K HDMI 2.0 inputs and four 3G SDI inputs, one UVC and one NDI bi-directional input & output. It supports digital embedded audio and video signals from a PC, cameras, and more. Additionally, it has analog audio input options via 2 x Phantom, 1 x Line - in and 1 x MIC, and also supports Bluetooth audio.


There are two separate HDMI outputs for multi-viewer Preview, Program or Test Pattern. One USB 3.0 output supports YUY2 and MJPEG capture formats, which can be recognized as a webcam for streaming to Facebook, YouTube, ZOOM, etc.

The UVC can be used bidirectionally for USB disk recording, wireless speaker and wireless microphone. This function can be applied to devices such as RGBlink AI mini. The Ethernet port with NDI license enable is bi-direction too, which ensures that the NDI encoder and decoder can work at the same time.

mini-mx SDI is built in with 5.5-inch TFT touch panel for menu operation and multiviewer video display.

Compared with mini-mx, mini-mx SDI has 4 more 3G SDI inputs and a ready to license bidirectional NDI, also Noise Reduction, Equalizer, Echo, Reverberation, Voice Fusion for audio inputs. Else it features including dynamic output control, multiviewer, picture in picture, chroma Key, transitions, on board PTZ camera controls and much more.

mini-mx SDI is web APP ready, also integrated with TAO Cloud for remote control and can stream to at least 4 content platforms at the same time.

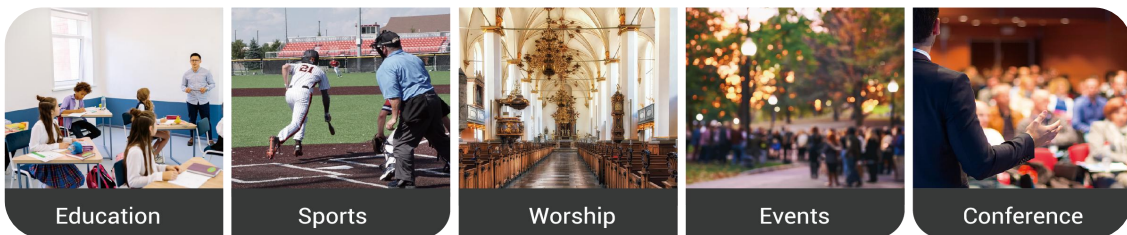


Key Features


- Embedded 5.5-inch TFT and touchscreen
- 10 input connectors (4 x HDMI 2.0, 4 x 3G-SDI, 2K UVC, and 2K NDI)
- 6-CH customizable video inputs
- Maximum 8 channels for audio mixing
- Dynamic text overlay/scoreboard
- Configurable VFA (video follow audio)
- 2-CH independent HD HDMI

- 2K streaming and live via IP and UVC
- Streaming supports NDI | HX2
- Streaming and management via RGBlink TAO Cloud
- Manual real-time control of PTZ cameras, such as zoom in/out, rotation, and focus, via VISCA or NDI
- Third-party control and integration via free RGBlink Central Control Protocol

Application

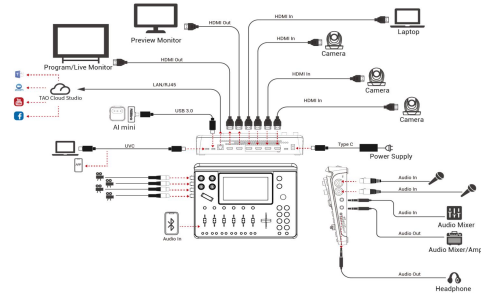

Dimension

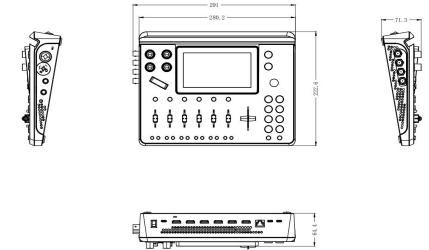

Specification

mini series mini-mx SDI

Connectors	Input	HDMI 4K	4 × HDMI-A
		SDI 3G	4 × SDI
		NDI	1 × NDI
	Output	HDMI 2K	2 × HDMI-A
		USB (Record)	1 × USB-C
		USB (Stream)	1 × USB-C
		NDI	1 × NDI
	Audio	MIC IN 1	1 × 6.35mm XLR + TS Jack (48V Phantom Power)
		MIC IN 2	1 × 6.35mm XLR + TS Jack
		LINE IN	1 × 6.35mm TRS Jack
OUT		1 × 6.35mm TRS Jack	
		1 × 3.5mm mini-Jack	
Communication	LAN	1 × RJ45	
Power	Power Supply	1 × USB-C	
Performance	Input Resolution	HDMI	1280 × 720@50/59.94/60 1024 × 768@60 1280 × 768@60 1280 × 800@60 1280 × 1024@60 1360 × 768@60 1366 × 768@60 1440 × 900@60 1600 × 1200@60 1680 × 1050@60 1920 × 1200@60 1920 × 1080i@50/59.94/60 1920 × 1080p@23.98/24/25/29.97/30/50/59.94/60 3840 × 2160p@30/50/60 4096x2160@30/50/60
	Output Resolution	HDMI/USB (Webcam)	1280 × 720@50/60 1920 × 1080@24/25/30/50/60
	Video	Video Formats	HDMI 2.0 HDCP 2.2
		Color Space	RGB 8bit
		Video Sampling	4:4:4 YUV
		Video Latency	<4 frames
	Audio	Line In Delay	up to 8 frames
		Audio Format	HDMI Linear PCM, 24 bits/48 kHz, 2 ch USB Linear PCM, 16 bits/48 kHz, 2 ch
	Record/Storage	Record Formats	MP4
		Disk Formats	FAT32(≤32 GB) exFAT(64GB~2T)
	Supported Standards	HDMI	2.0
		USB	3.0
H.265		ITU-T H.265/ ISO/IEC 23008-2	
Power	Compatability	USB Power Delivery (PD) 3.0	
	Supported Cables	Certified USB PD Aware	
	Input Voltage	USB-C 12V/3.3A	
	Maximum Power	40W	
Environment	Temperature	0℃~45℃	
	Humidity	10%~85% RH	
Physical	Net Weight	1.48kg	
	Packaged Weight	2.80kg	
	Net Dimension	291mm × 222.6mm × 71.3mm	
	Packaged Dimension	332.0mm × 238.5mm × 109.0mm	

Order Codes

Order Codes	Item
230-0009-01-0	mini-mx SDI

Contact us

Tel: +86-592-5771197
Fax: +86-592-5788216
E-mail: sales@rgblink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3,
Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

