

TAO 1tiny v2

PRELIMINARY



Key Features

- 4K UVC camera to HDMI conversion
- Webcam signal transcoding
- Low Power consumption
- Ethernet port for NDI encoding/decoding
- Power from standard USB-C PD PSU's


Specification

Connectors	Input	Type-C	1 × USB-C
	Output	HDMI 2.0	1 × HDMI-A
	Power	Type-C	1 × USB-C
	Ethernet	LAN	1 × RJ45
Performance	Input Resolutions	USB-C	
		SMPTE	720p@25/30/50/60 1080p@30/50/60 2160p@30
		VESA	1280 × 720@30/50/60 1280 × 768@60 1920 × 1080@25/30/50/60 3840 × 2160@30
	Output Resolutions	HDMI	
		SMPTE	1080p@30/50/60 2160p@30
		VESA	1280 × 720@30/50/60 1280 × 768@60 1920 × 1080@25/30/50/60 3840 × 2160@60
	Supported Standard	HDMI	2.0
		USB	3.0
	Video Encoding	MJPEG H.264 H.265	
	Streaming Protocols	RTMP/RTMPs/RTSP/NDI	
Power	Input Voltage	9V/2A or 5V/2A(depends on adapter)	
	Max Power	18W	
Environment	Temperature	0℃~55℃	
	Humidity	20%~55%	
Physical	Weight	Net	0.2kg
	Dimension	Net	110mm × 64.5mm × 25.4mm


*Power of Adapter is not less than:5V/2A/10W;Do not use the USB port of the computer for power supply

Application

How to work with USB camera with TAO 1tiny

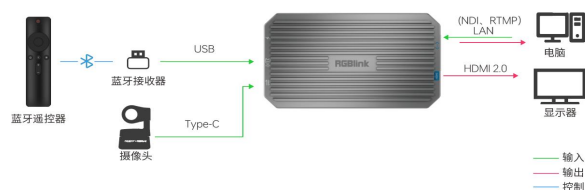

Dimension

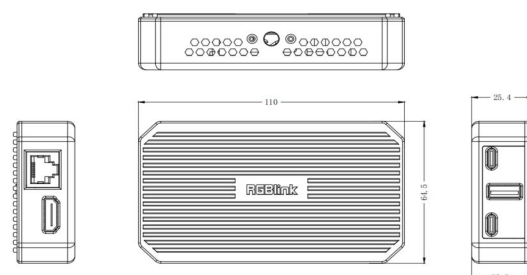

How to work with streaming switcher with TAO 1tiny



Order Codes

Product Code	Item
410-5513-12-0	TAO 1tiny v2

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: Room 601A, No. 37-3 Banshang community, Building 3, Xinke Plaza, Torch Hi-Tech Industrial Development Zone, Xiamen, China

Specifications are correct at time of printing and subject to change or alteration without notice.

