

Dual HDMI 2.0 Input/Loop Module



Key Features

- Dual independent standard HDMI2.0 inputs, bitrate up to 18Gbps
- Dual HDMI 2.0 loop out
- Support for 24/30/bit RGB | YCbCr 4:4:4 input
- Support for EDID management
- HDR compatible


Specification

Connectors	Input	2 x HDMI-A
Performance	Input Resolutions	SMPTE 720P@60 1080P@60 2160p@60 VESA 800x600@60 1024x768@60 1280x720@60 1280x800@60 1366x768@60 1400x1050@60 1600x1200@60 1920x1080@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@23.98/24/25/29.97/30/50/60 4096x2160@60
	Supported Standard	HDMI 2.0
Physical	Weight	0.2kg
	Dimension	192mmx288mmx20mm

Order Codes

Product Code	Item
191-0004-02-0	Dual HDMI 2.0 input/Loop module

Dimensions

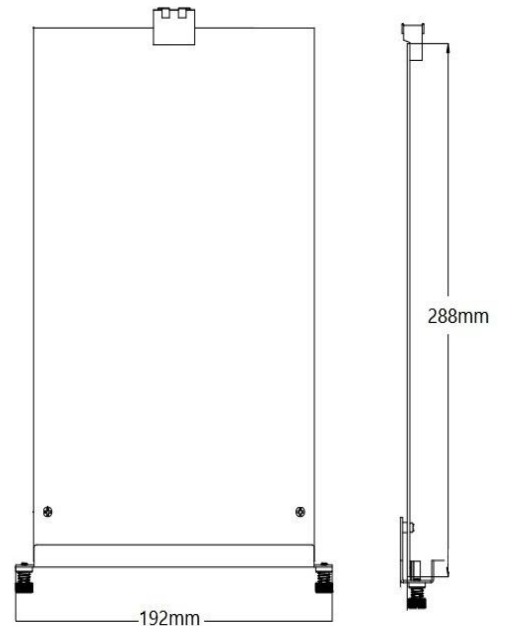

Compatibility

This module may be used in the following products

Product Code	Item
120-0004-01-0	D4

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink®

www.rgbink.com

